



The high-performance fiber optic interconnect system successfully deployed in hundreds of commercial and military aerospace and other applications—from F-16 upgrade systems to the revolutionary F-35 Joint Strike Fighter



Terminated and tested point-to-point and multibranch D38999 type fiber optic cable assemblies

- Composite, aluminum and stainless steel shells available
- Qualified size #16 MIL-PRF-29504 precision ceramic termini
- Singlemode and multimode fiber, from 9/125 to 1000 microns
- Ultra-low insertion loss values, <.50dB typical
- From 2 to 37 Termini
- Plug and In-Line, Jam Nut and Square Flange Receptacles
- Patented MIL-DTL-38999 fiber optic test probes and adapters


SuperNine® MIL-DTL-38999 Series III Type



Advanced fiber optic connection system




MIL-DTL-38999 type fiber optic connection system termination, inspection, test, and cleaning tools are available now from Glenair. We also offer comprehensive F/O training services for assembly and maintenance technicians.

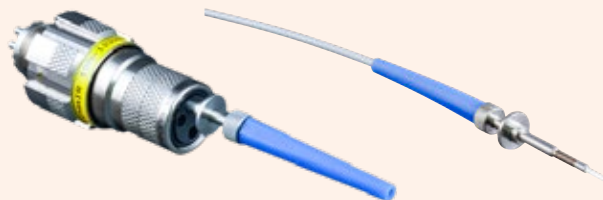

Glenair optical fiber test probes and connector adapters provide accurate and repeatable testing of MIL-DTL-38999 F/O assemblies

Glenair M29504/4 and /5 QPL termini are in stock and ready for immediate, same-day shipment




A complete range of metal and composite backshells and protective covers is available

MIL-PRF-29504/04 and /05 Fiber Optic Termini Performance Data	
Test Type	Performance Requirement
Operating Temperature	-55°C to +165°C (dependent on epoxy and cable)
Temperature Cycling	-65°C to +175°C
Thermal Shock	-55°C to +150°C, 5 cycles
Temperature Life	+150°C for 1,000 hours
Random Vibration	20-2,000 Hz, 42.2 g's
Shock (Half-sine Pulse)	300 g Peak Load
Mechanical Shock	MIL-S-901, Grade A, Type B, Class I
Mating Durability	500 cycles (cleaning after 100 matings)
Salt Spray	48 hours (Terminus only)
Cable Retention Force	22.0 lbs (dependent on cable construction)


Select SuperNine Fiber Optic Connector Part Numbers	
Glenair Dwg. Number*	Product Description
181-001	#16 Socket Terminus
181-002	#16 Pin Terminus
181-048	#16 Dummy Terminus
180-091 (05)	In-Line Receptacle Connector
180-091 (06)	Plug Connector
180-091 (08)	Jam Nut Mount Receptacle Connector
180-091 (H7)	Square Flange Wall Mount Receptacle with Round Holes
180-091 (S7)	Square Flange Wall Mount Receptacle with Slotted Holes
180-091 (T7)	Square Flange Wall Mount Receptacle with Tapped Holes

* See fiber optic catalog for complete part number information

INSERT ARRANGEMENTS

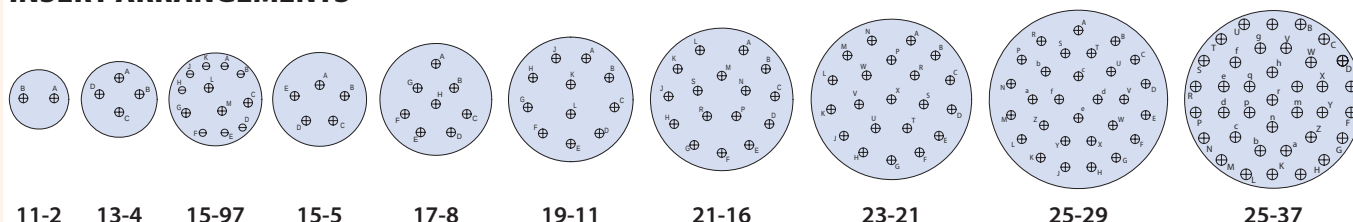

Per MIL-STD-1560. Mating face of pin insert shown.

M29504/04 TYPE, STYLE 1 PIN AND SOCKET TERMINI FOR MIL-DTL-38999 SERIES III
**181-002-XXX**

Pin Terminus

**181-001-XXX**

Socket Terminus

**181-048-16**

Size 16 Dummy Terminus
reduces weight and eliminates cost
of using expensive contacts

Part Number	Fiber Size Core/Cladding/Coating (Microns)	Ø A (Microns)	Ref. M29504/04-XXXX
181-00X-125	9/125 (Singlemode)	125.5	M29504/04-4208
181-00X-126S	9/125 (Singlemode)	126.0	M29504/04-4209
181-00X-126	50/125 & 62.5/125	126.0	M29504/04-4210
181-00X-127	50/125 & 62.5/125	127.0	M29504/04-4040
181-00X-142	100/140	142.0	M29504/04-4043
181-00X-144	100/140	144.0	N/A
181-00X-145	100/140	145.0	M29504/04-4044
181-00X-156	62.5/125/155 (Polyimide)	156.0	M29504/04-4211
181-00X-157	62.5/125/155 (Polyimide)	157.0	M29504/04-4212
181-00X-173	100/140/172 (Polyimide)	173.0	M29504/04-4087
181-00X-175	100/140/172 (Polyimide)	175.0	M29504/04-4213
181-00X-231	200/230	231.0	N/A
181-00X-236	200/230	236.0	N/A
181-00X-286	200/280	286.0	N/A
181-00X-448	400/440	448.0	N/A
181-00X-533	486/500	533.0	N/A

SUPERNINE FIBER OPTIC CONNECTORS


Part Number Development						
Sample Part Number	180-091	XW	06	-17-8	P	N
Series / Basic Part No.	D38999 Series III Type					
Material/Finish	See Material/Finish Table					
Connector Style	06 = Plug Connector					
Shell Size/Insert Arr.*	IAW MIL-DTL-38999 Series III, Per MIL-STD-1560					
Insert Designation	P = Pin S = Socket					
Alternate Key Position*	A, B, C, D, E, N = Normal; Per MIL-DTL-38999					




Part Number Development						
Sample Part Number	180-091	XW	05	-17-8	P	N
Series / Basic Part No.	D38999 Series III Type					
Finish	See Material/Finish Table					
Connector Style*	05 = In-Line Receptacle					
Shell Size/Insert Arr.*	IAW MIL-DTL-38999 Series III, Per MIL-STD-1560					
Insert Designation	P = Pin S = Socket					
Alternate Key Position*	A, B, C, D, E, N = Normal; Per MIL-DTL-38999					

SuperNine® MIL-DTL-38999 Series III Type



How to order Connectors



Part number development						
Sample Part Number	180-091	XW	08	-17-8	P	N
Series / Basic Part No.	D38999 Series III Type					
Material/Finish	See Material/Finish Table					
Connector Style	08 = Jam Nut Receptacle					
Shell Size/Insert Arr.*	IAW MIL-DTL-38999 Series III, Per MIL-STD-1560					
Insert Designation	P = Pin S = Socket					
Alternate Key Position*	A, B, C, D, E, N = Normal; Per MIL-DTL-38999					




Part number development						
Sample Part Number	180-091	XW	H7	-17-8	P	N
Series / Basic Part No.	D38999 Series III Type					
Material/Finish	See Material/Finish Table					
Connector Style	H7 = Wall Mount Receptacle with Round Holes (Std)					
Shell Size/Insert Arr.*	IAW MIL-DTL-38999 Series III, Per MIL-STD-1560					
Insert Designation	P = Pin S = Socket					
Alternate Key Position*	A, B, C, D, E, N = Normal; Per MIL-DTL-38999					




Part number development						
Sample Part Number	180-091	XW	S7	-17-8	P	N
Series / Basic Part No.	D38999 Series III Type					
Material/Finish	See Material/Finish Table					
Connector Style	S7 = Wall Mount Receptacle with Slotted Holes					
Shell Size/Insert Arr.*	IAW MIL-DTL-38999 Series III, Per MIL-STD-1560					
Insert Designation	P = Pin S = Socket					
Alternate Key Position*	A, B, C, D, E, N = Normal; Per MIL-DTL-38999					



Part number development						
Sample Part Number	180-091	XW	T7	-17-8	P	N
Series / Basic Part No.	D38999 Series III Type					
Material/Finish	See Material/Finish Table					
Connector Style	T7 = Wall Mount Receptacle with Threaded Insert Holes					
Shell Size/Insert Arr.*	IAW MIL-DTL-38999 Series III, Per MIL-STD-1560					
Insert Designation	P = Pin S = Socket					
Alternate Key Position*	A, B, C, D, E, N = Normal; Per MIL-DTL-38999					

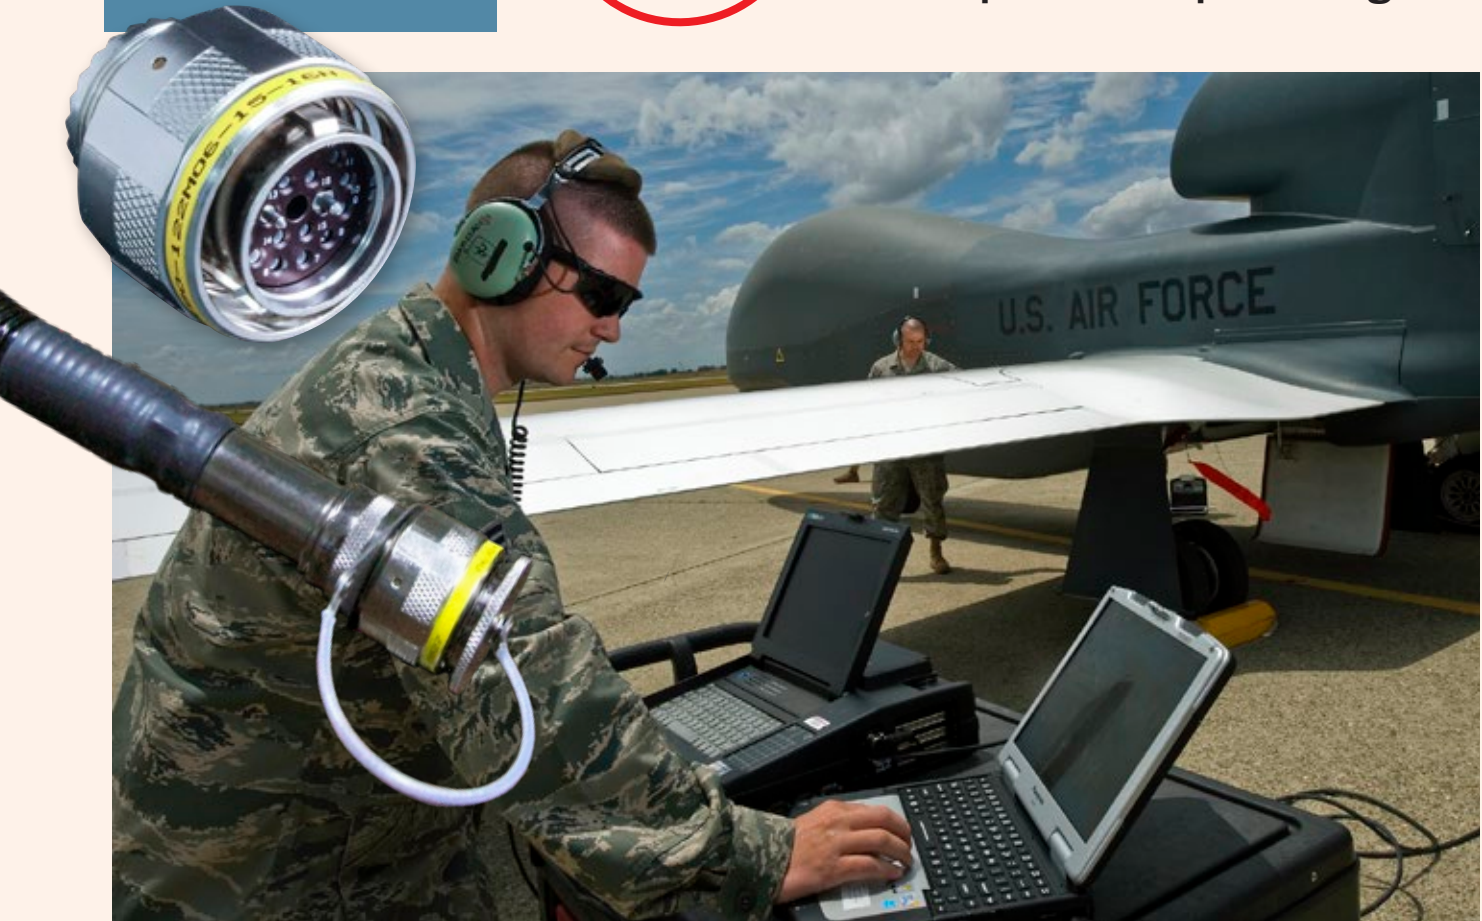

The system of choice for military and commercial air, space and other applications: Outstanding optical and environmental performance with nearly double the density of standard mil-spec solutions

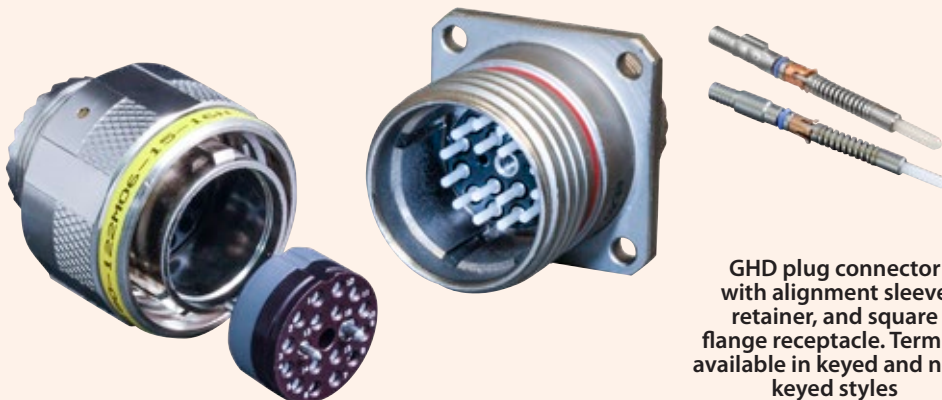


GHD plug connector with alignment sleeve retainer, and square flange receptacle. Termini available in keyed and non-keyed styles

- Innovative #18 (1.25mm ferrule) front-release genderless termini accommodate 900 μ to 2.0mm jacketed fiber
- M85045/16 cable accommodation
- Composite, aluminum or stainless steel shells
- Single keying for APC polish available
- Better optical performance than D38999 with nearly double the density
- Precision alignment sleeve retainer with integrated guide pins
- Piston o-ring sealing—submersible design

SIZE- AND WEIGHT-SAVING Glenair High Density (GHD)



Signature HD fiber optic connection system

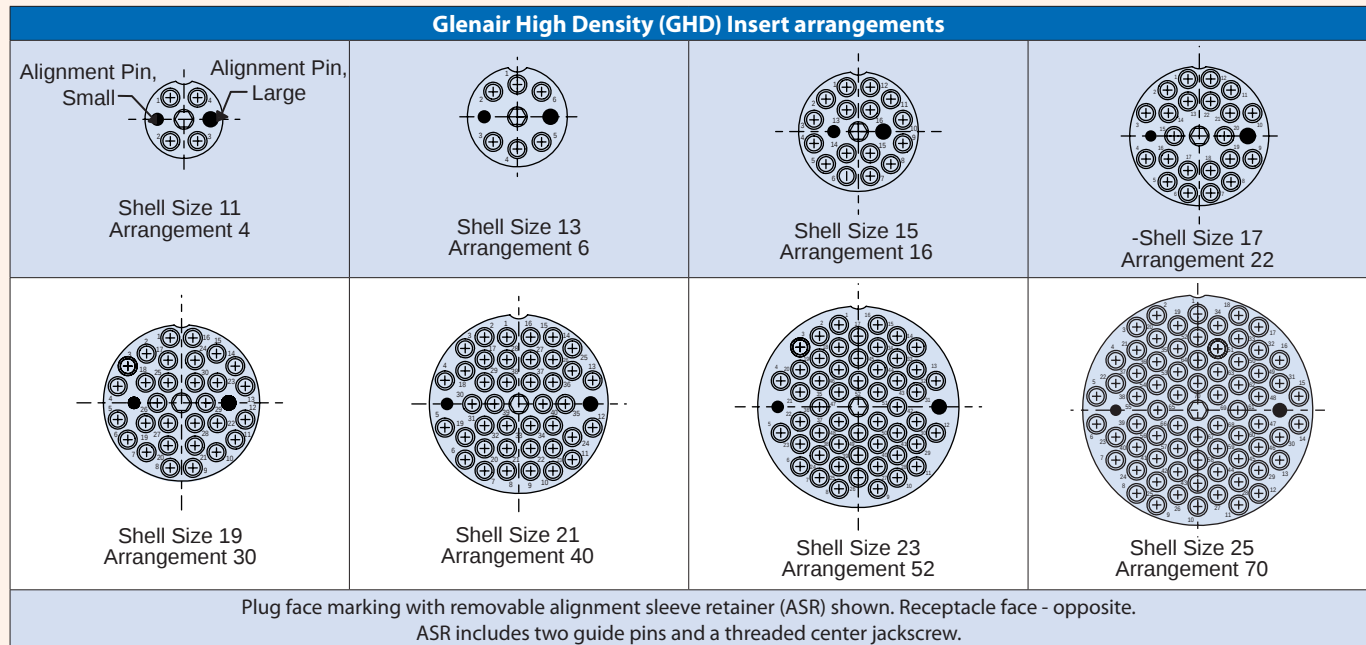

Fiber Optic Pin Termini Specifications			
Assembly Dash Number		Fiber Size Core/Cladding	A Dia. [microns]
Keyed	Non-Keyed		
181-047-1255C	181-056-1255C	9/125 (Singlemode)	125.5
181-047-1260C	181-056-1260C	9/125, 50/125, 62.5/125	126.0
181-047-1270C	181-056-1270C	50/125, 62.5/125	127.0
181-047-1420C	181-056-1420C	100/140	142.0
181-047-1450C	181-056-1450C	100/140	145.0
181-047-1560C	181-056-1560C	62.5/125/155 (Polyimide)	156.0
181-047-1570C	181-056-1570C	62.5/125/155 (Polyimide)	157.0
181-047-1730C	181-056-1730C	100/140/172 (Polyimide)	173.0
181-047-1750C	181-056-1750C	100/140/172 (Polyimide)	175.0
181-047-2360C	181-056-2360C	200/233	236.0
181-047-2860C	181-056-2860C	200/280	286.0


Crimp Sleeve is supplied with Terminus Assembly, and may be ordered separately. For terminus less crimp sleeve, omit **C** from end of part number (e.g. 181-056-1260).

GHD Fiber Optic Part Number Reference	
Glenair Dwg. Number	Product Description
181-047	#18 Pin Terminus, Keyed for APC Polish
181-056	#18 Pin Terminus (non-keyed)
181-058	#18 Dummy Terminus
180-122 (05)	In-Line Receptacle Connector
180-122 (06)	Plug Connector with Alignment Sleeve Retainer
180-122 (08)	Jam Nut Mount Receptacle Connector
180-122 (H7)	Square Flange Receptacle with Round Holes
180-122 (S7)	Square Flange Receptacle with Slotted Holes


* See fiber optic catalog for complete part number information

Pin Density Comparison: Glenair High Density Versus D38999 and M28876								
Connector Style / Size	11	13	15	17	19	21	23	25
D38999 Cavity Count	2	4	5	8	11	16	21	29/37
M28876 Cavity Count	2	4	8	N/A	N/A	N/A	31	N/A
GHD Cavity Count	4	6	16	20	30	40	52	70

Glenair High Density (GHD) Features

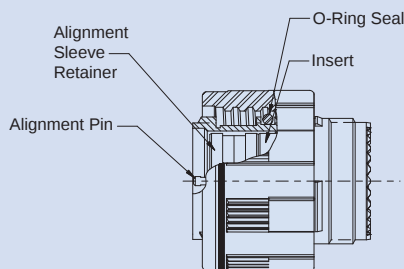


D38999 Series III Style Coupling
Five Alternate Key Positions: A, B, C, D, E (N = Normal)

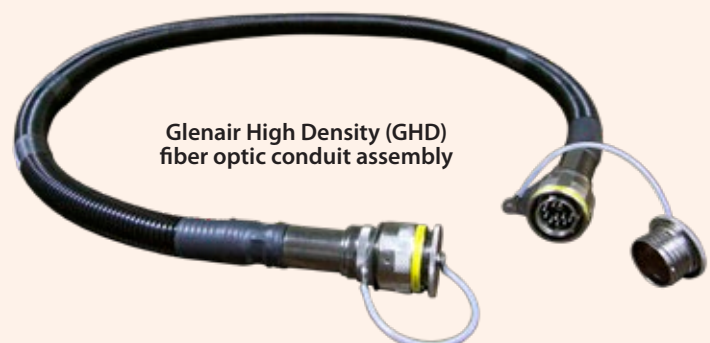


SIZE- AND WEIGHT-SAVING Glenair High Density (GHD)


Signature HD fiber optic connection system How to order connectors




Part Number Development						
Sample Part Number	180-122	NF	06	-15-16	N	C
Series / Basic Part No.	Glenair High Density Fiber Optic Connector					
Material/Finish	See Material/Finish Table					
Connector Style	06 = Plug with Alignment Sleeve Retainer					
Shell Size/Insert Arr.	11-4, 13-6, 15-16, 17-22, 19-30, 21-40, 23-52, 25-70					
Alternate Key Position*	A, B, C, D, E, N = Normal					
O-Ring Option	C = Conductive O-Ring Omit = Standard O-Ring					

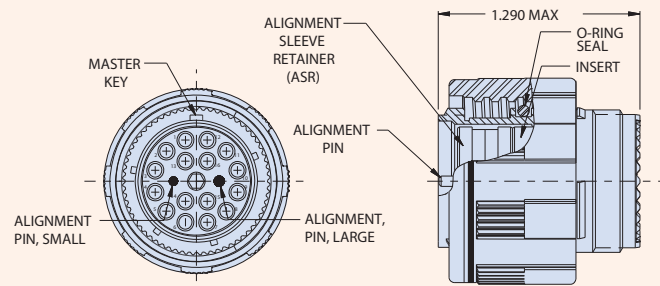

Part Number Development			
Sample Part Number	180-122	ASR	-15-16
Series / Basic Part No.	Glenair High Density Fiber Optic Connector		
Connector Style	ASR = Alignment Sleeve Retainer		
Shell Size/Insert Arr.	11-4, 13-6, 15-16, 17-22, 19-30, 21-40, 23-52, 25-70		

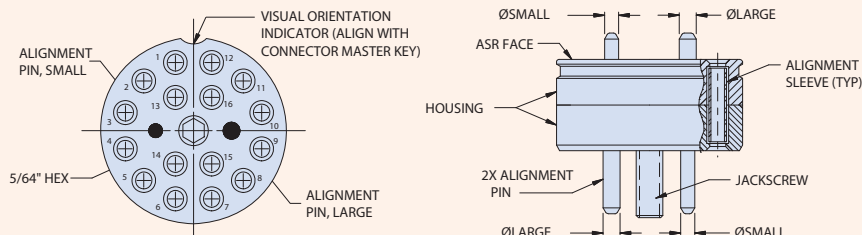

Part Number Development					
Sample Part Number	180-122	NF	08	-15-16	N
Series / Basic Part No.	Glenair High Density Fiber Optic Connector				
Material/Finish	See Material/Finish Table				
Connector Style	08 = Jam Nut Receptacle				
Shell Size/Insert Arr.	11-4, 13-6, 15-16, 17-22, 19-30, 21-40, 23-52, 25-70				
Alternate Key Position*	A, B, C, D, E, N = Normal				

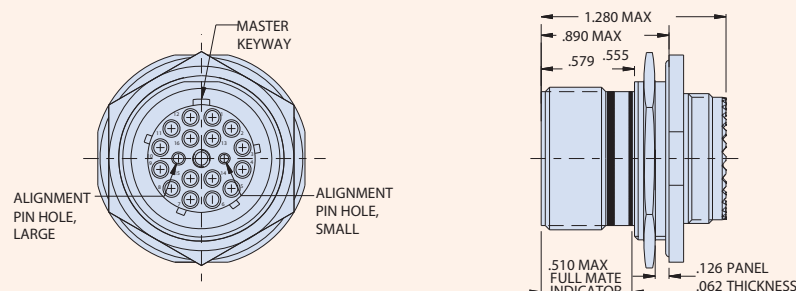


SIZE- AND WEIGHT-SAVING Glenair High Density (GHD)




Signature HD fiber optic connection system How to order connectors


Part Number Development					
Sample Part Number	180-122	NF	05	-15-16	N
Series / Basic Part No.	Glenair High Density Fiber Optic Connector				
Material/Finish	See Material/Finish Table				
Connector Style	05 = In-Line Receptacle				
Shell Size/Insert Arr.	11-4, 13-6, 15-16, 17-22, 19-30, 21-40, 23-52, 25-70				
Alternate Key Position*	A, B, C, D, E, N = Normal				

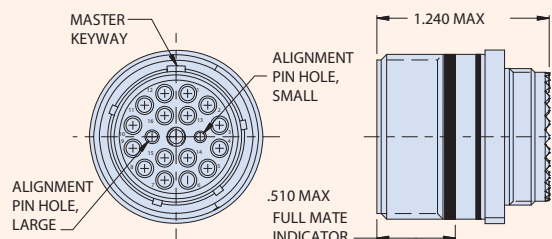

Part Number Development					
Sample Part Number	180-122	NF	H7	-15-16	N
Series / Basic Part No.	Glenair High Density Fiber Optic Connector				
Material/Finish	See Material/Finish Table				
Connector Style	H7 = Wall Mount Receptacle with Round Holes				
Shell Size/Insert Arr.	11-4, 13-6, 15-16, 17-22, 19-30, 21-40, 23-52, 25-70				
Alternate Key Position*	A, B, C, D, E, N = Normal				

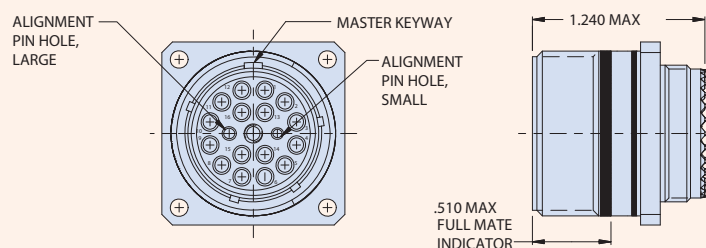

Part Number Development					
Sample Part Number	180-122	NF	S7	-15-16	N
Series / Basic Part No.	Glenair High Density Fiber Optic Connector				
Material/Finish	See Material/Finish Table				
Connector Style	S7 = Wall Mount Receptacle with Slotted Holes				
Shell Size/Insert Arr.	11-4, 13-6, 15-16, 17-22, 19-30, 21-40, 23-52, 25-70				
Alternate Key Position*	A, B, C, D, E, N = Normal				

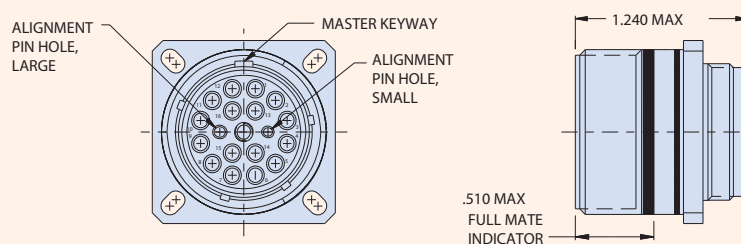



The unique design of the Glenair Front Release system allows for rapid integration of optical media in a broad range of cylindrical and rectangular connector packages. By placing retention and environmental sealing components directly on the termini, Glenair is able to fabricate unique fiber optic connector shell packages without costly tooling and engineering.

- Precision size 16 pin-socket front release termini with integrated retention clip
- Singlemode and multimode for all popular fiber sizes
- Typical insertion loss less than 0.5 dB
- Cylindrical and rectangular connectors
- Connector shells available in aluminum and stainless steel

Signature fiber optic connection system




Glenair Front Release (GFR) fiber optic connection systems perform at insertion loss levels equivalent to other high-performance, tactical fiber optic systems such as M29504 termini used in D38999 and M28876 connectors. The GFR system enables Glenair to integrate optical media in Micro-D and D-Subminiature shells as well as micro miniature circular packaging. Contact the factory for availability and application engineering assistance for both standard and custom fiber optic connection systems.

HOW TO ORDER GLENAIR FRONT RELEASE MICRO MINIATURE CIRCULAR CONNECTORS




Contact the Factory for circular connectors requiring enhanced vibration and mechanical shock performance


How To Order GFR Micro Miniature Circular Connectors						
Sample Part Number		180-132	M	06-	9-4	P A
Series	180-132 GFR Micro Miniature Circular					
Shell Size	C	Aluminum Alloy	Anodize, Black			
	M		Electroless Nickel			
	NF		CAD/Olive Drab over Electroless Nickel			
	ZN		Zinc-Nickel/Olive Drab over Electroless Nickel			
	ZNU		Black Zinc-Nickel over Electroless Nickel			
	Z1	Stainless Steel	Passivate			
Connector Style	04- Jam Nut w/ Wire Holes 06- Plug 08- Jam Nut Receptacle 07- Wall Mount Receptacle					
Shell Size/Insert Arr.	9-2, 9-4, 13-8, 16-12					
Contact Type	P - Pin Termini S - Socket Termini					
Key Polarization	A, B, C, D (See Table). Omit for 9-2 Arrangement which has 2 Keys/Keyways only.					

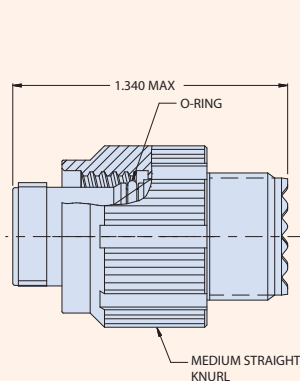


06- Plug

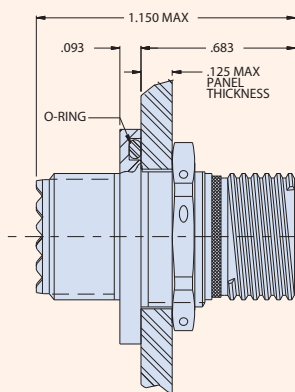

04- Jam Nut Receptacle with Wire Holes

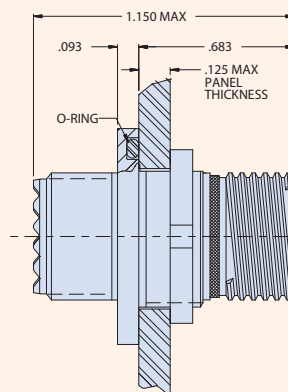





08- Jam Nut Receptacle



07- Wall Mount Receptacle


Key Polarization		
Position	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°

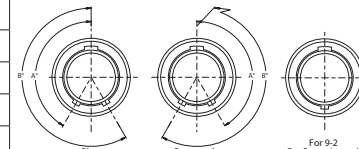


Insert Arrangements (pin rear shown)			
			
9-2	9-4	13-8	16-12

RAPID INTEGRATION Glenair Front Release (GFR)


How to order GFR Termini



PIN TERMINI

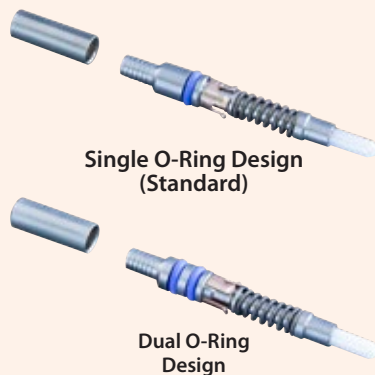

SOCKET TERMINI

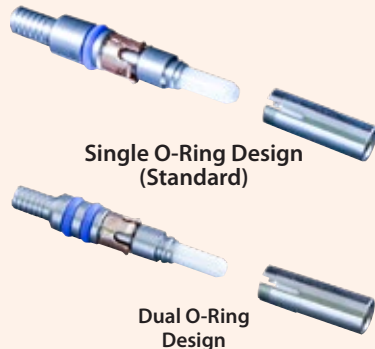

DUMMY TERMINUS



How To Order GFR Fiber Optic Termini				
Sample Part Number		181-011	-126	K D
Series	181-012 GFR front-release pin terminus			
	181-011 GFR front-release socket terminus			
Dash No.	Dash No.	Ferrule Hole Ø	Typical Fiber Type	Typical Fiber Size core/cladding/coating
	-125	125.5 µm	Single Mode	9/125 µm
	-126S	126.0 µm	Single Mode	9/125 µm
	-126	126.0 µm	Multi Mode	50/125, 62.5/125 µm
	-142	142.0 µm	Multi Mode	100/140 µm
	-156	156.0 µm	Multi Mode	62.5/125/155 µm (Polyimide)
	-173	173.0 µm	Multi Mode	100/140/172 µm (Polyimide)
	-175	175.0 µm	Multi Mode	100/140/172 µm (Polyimide)
	-231	231.0 µm	Multi Mode	200/225 µm
	-236	236.0 µm	Multi Mode	200/230 µm
	-286	286.0 µm	Multi Mode	200/280 µm
	-448	448.0 µm	Multi Mode	400/440 µm
Alignment Sleeve (socket only)		K = Stainless Steel Sleeve Omit = Ceramic Sleeve (standard) Omit designator for pin terminus		
O-Ring Option		D = Dual O-Rings Omit = Single O-Ring (standard)		

Dummy Terminus	
181-051	Size 16 Dummy Terminus for GFR Connectors

TERMINI MATERIAL AND FINISH

Ferrule: Zirconia Ceramic
 Alignment Sleeve (socket): Zirconia Ceramic or Stainless Steel/Passivate
 Protective Cover (socket): BeCu Alloy/Nickel
 Body: Stainless Steel/Passivate
 Spring (pin): Stainless Steel/Passivate
 Bushing (pin): Stainless Steel/Passivate
 Retention Clip: BeCu Alloy
 O-Ring(s): Fluorosilicone
 Crimp Sleeve: Brass Alloy/Nickel

NOTES


Crimp sleeves are supplied with terminus assemblies. Spares may be ordered separately. See Glenair GAP-031 and GAP-031B for termination and assembly tools/procedures.

Table II: Tools and Accessories	
182-005S	Polishing Tool, socket
182-005P	Polishing Tool, pin
182-012	Crimp Tool
182-013	Insertion Tool, Straight
182-014	Insertion Tool, 90 Degree
182-015	Removal Tool
182-016	Insertion/Removal Tool, Alignment Sleeve, socket
181-011-S	Protective Cover with Ceramic Sleeve
181-011-K	Protective Cover with Stainless Steel Sleeve
265-002	Crimp Sleeve, Ø 2.2mm Max Jacket

How to order GFR Micro-D and D-Subminiature connectors




Avoid damage! Consult the factory for mating / unmating instructions



Recommended Panel Cutout

How To Order GFR Micro-D Connectors				
Sample Part Number		180-064	-25	-4 M
Series	180-064 GFR Micro-D Plug 180-063 GFR Micro-D Receptacle			
Shell Size	-9 (1 terminus max) -15 (2 termini max) -21 (3 termini max) -25 (4 termini max) -31 (5 termini max) -100 (8 termini max)			
No. of Termini	1, 2, 3, 4, 5, 8			
Material / Finish	C	Aluminum Alloy	Anodize, Black	
	M		Electroless Nickel	
	NF		CAD/Olive Drab over Electroless Nickel	
	ZN		Zinc-Nickel/Olive Drab over Electroless Nickel	
	Z1	Stainless Steel	Passivate	

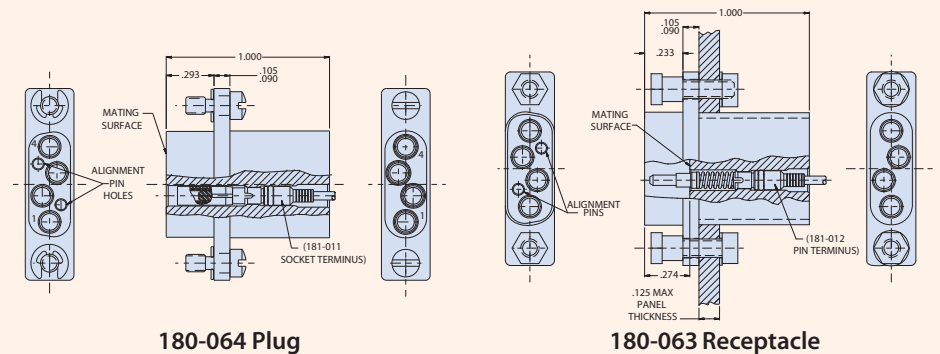


180-064 Plug

180-063 Receptacle



Avoid damage! Consult the factory for mating / unmating instructions

How To Order GFR D-Subminiature Connectors				
Sample Part Number		180-066	-15	-5 -M
Series	180-066 GFR D-Sub Plug 180-065 GFR D-Sub Receptacle			
Shell Size	-9 (4 termini max) -15 (5 termini max) -25 (8 termini max) -50 (12 termini max)			
No. of Termini	4, 5, 8, 12			
Material / Finish	C	Aluminum Alloy	Anodize, Black	
	M		Electroless Nickel	
	NF		CAD/Olive Drab over Electroless Nickel	
	ZN		Zinc-Nickel/Olive Drab over Electroless Nickel	
	Z1	Stainless Steel	Passivate	

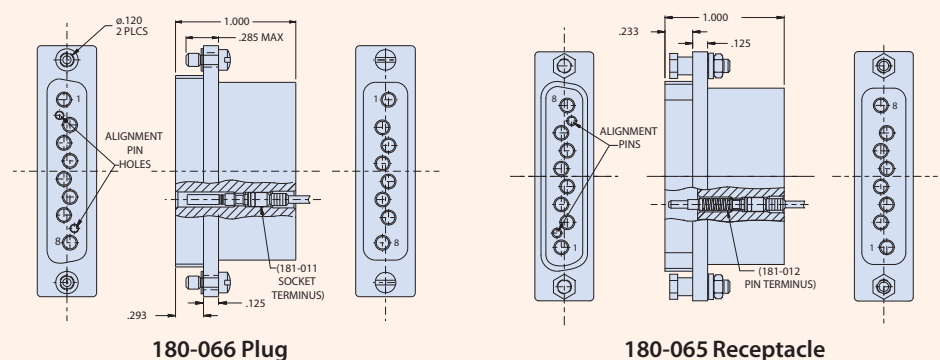

180-066 Plug

180-065 Receptacle




Rugged performance MT ferrules
in MIL-DTL-38999 advanced-
performance connectors or in
precision-machined Series 791
rectangulars—only from Glenair

- SuperNine with MT
- Ruggedized “better than QPL” SuperNine® MIL-DTL-38999 Series III type interconnect packaging
- Singlemode and multimode fiber
- Low insertion loss
- Environmental sealing: IP67 mated, IP68 available at interface
- RoHS-compliant finishes available
- MT ferrules sold separately
- MT assembly tool, P/N 182-062 also available and sold separately

The MT Ferrule High-Density Advantage



24 fibers



3 fibers

Up to 24 fibers in a single compact,
lightweight ferrule
(7mm x 3mm / .276" x .118")
—same real estate as three size #16 termini
side by side

ULTRA HIGH-DENSITY MT Ferrule



Signature fiber optic connection system: SuperNine D38999 and Series 791 Rectangular


SUPERNINE® MT CONNECTOR SIZES AND INSERT ARRANGEMENTS

SuperNine® MT MIL-DTL-38999 Series III type connectors with plug-and-play MT ferrule accommodation			
CONNECTOR MASTER KEY 2X GUIDE PIN			
Shell Size 11 Insert Arrangement -1 Up to 24 fibers (1 MT ferrule)	Shell Size 13 Insert Arrangement -2 Up to 48 fibers (2 MT ferrules)	Shell Size 15 Insert Arrangement -3 Up to 72 fibers (3 MT ferrules)	Shell Size 17 Insert Arrangement -4 Up to 96 fibers (4 MT ferrules)


SERIES 791 WITH MT

Series 791 MT fiber optic connector is the world's smallest ruggedized MT connector solution with robust resistance to vibration and shock. Series 79 MT delivers superior low insertion-loss performance (up to 500 mating cycles) compared to commercial solutions. Connectors are supplied in single (consult factory for dual and quad) MT configurations with retaining plate and optional banding porch on plugs, and ultra low-profile retaining plate on receptacles.


SERIES 791 PRECISION-MACHINED SPACE-GRADE MT FERRULE-EQUIPPED CONNECTORS



Receptacle with female MT ferrule
available with or without EMI gasket




Plug with male MT ferrule with retaining
plate and banding porch




Plug with male MT ferrule
and retaining plate

- Ruggedized small form-factor, high-density MT fiber optic solution
- Temperature tolerance from -40°C to +85°C
- Optimized for use with parallel optic transceivers in ribbon or round cable applications
- Low insertion loss performance in high vibration and shock environments

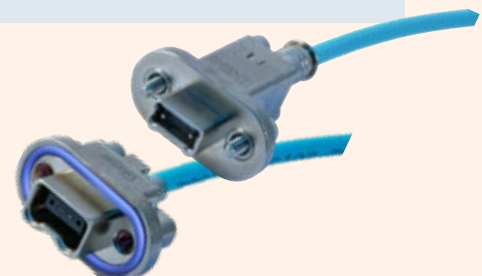


SERIES 183-001 SuperNine MT Fiber Optic Connectors

How to order connectors

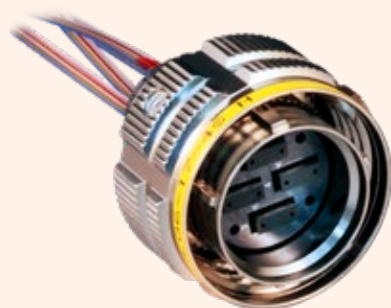

SuperNine MT Cable Plug						
Sample Part Number	183-001	ME	G6	-17-4	S	N
Basic Part Number	MT Ferrule Fiber Optic Connector					
Material/Finish Code	See Table I					
Connector Style	G6 = Plug with EMI/RFI ground spring					
Shell Size / Insert Arrangement	11-1, 13-2, 15-3, 17-4					
Insert Designator	S = Socket insert (plug only)					
Alternate Key Position	A, B, C, D, E, N = Normal (per MIL-DTL-38999)					




SuperNine MT Jam Nut Mount Receptacle						
Sample Part Number	183-001	ME	08	-17-4	P	N
Basic Part Number	MT Ferrule Fiber Optic Connector					
Material/Finish Code	See Table I					
Connector Style	08 = Jam nut receptacle					
Shell Size / Insert Arrangement	11-1, 13-2, 15-3, 17-4					
Insert Designator	P = Pin insert (receptacle only)					
Alternate Key Position	A, B, C, D, E, N = Normal (per MIL-DTL-38999)					



SuperNine MT In-Line Receptacle						
Sample Part Number	183-001	ME	05	-17-4	P	N
Basic Part Number	MT Ferrule Fiber Optic Connector					
Material/Finish Code	See Table I					
Connector Style	05 = In-line receptacle					
Shell Size / Insert Arrangement	11-1, 13-2, 15-3, 17-4					
Insert Designator	P = Pin insert (receptacle only)					
Alternate Key Position	A, B, C, D, E, N = Normal (per MIL-DTL-38999)					

Table I - Material and Finish		
Code	Material	Finish Description
ME	Aluminum Alloy	Electroless Nickel
MT		Nickel-PTFE, Grey
NF		Cadmium, Olive Drab
ZR		Zinc-Nickel, Black
XM	Composite	Electroless Nickel
XW		Cadmium, Olive Drab
Z1	Stainless Steel	Passivate
ZL		Electro-Deposited Nickel

How to order connectors

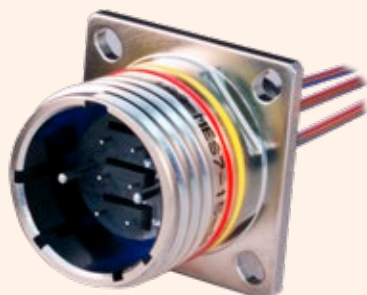


SuperNine MT Wall-Mount Receptacle, Standard Holes						
Sample Part Number	183-001	ME	H7	-17-4	P	N
Basic Part Number	MT Ferrule Fiber Optic Connector					
Material/Finish Code	See Table I					
Connector Style	H7 = Wall-mount receptacle with round holes					
Shell Size / Insert Arrangement	11-1, 13-2, 15-3, 17-4					
Insert Designator	P = Pin insert (receptacle only)					
Alternate Key Position	A, B, C, D, E, N = Normal (per MIL-DTL-38999)					

SuperNine MT Wall-Mount Receptacle, Slotted Holes						
Sample Part Number	183-001	ME	S7	-17-4	P	N
Basic Part Number	MT Ferrule Fiber Optic Connector					
Material/Finish Code	See Table I					
Connector Style	S7 = Wall-mount receptacle with slotted holes					
Shell Size / Insert Arrangement	11-1, 13-2, 15-3, 17-4					
Insert Designator	P = Pin insert (receptacle only)					
Alternate Key Position	A, B, C, D, E, N = Normal (per MIL-DTL-38999)					

Table I - Material and Finish

Code	Material	Finish Description
ME	Aluminum Alloy	Electroless Nickel
MT		Nickel-PTFE, Grey
NF		Cadmium, Olive Drab
ZR		Zinc-Nickel, Black
XM	Composite	Electroless Nickel
XW		Cadmium, Olive Drab
Z1	Stainless Steel	Passivate
ZL		Electro-Deposited Nickel

MT FERRULE KIT




How To Order MT Ferrules				
Sample Part Number	181-108	-1253	-12	S
Basic Part Number	MT Ferrule kit			
Fiber type	-1253 = Singlemode -126 = Multimode			
Number of Fibers	-12 (12 fibers, available in singlemode and multimode) -24 (24 fibers, available in multimode only)			
Ferrule Style	S = Female (Plug Only) P = Male (Recp Only)			

Material/Finish

- Ferrule: Polyphenylene Sulfide Resin
- Spacer, Female: High-grade engineering plastic
- Spring: Stainless Steel
- Boot: TPE

GLENAIR
SIGNATURE
FIBER OPTIC
CONNECTION
SYSTEMS

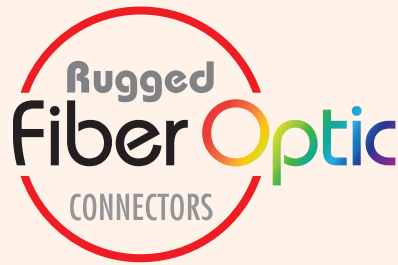

Rugged High-Density
MT Ferrule Fiber Optic
Connection System—
With Mil-Grade Miniature
Series 79 Packaging



Single-ferrule high-density
MT datalinks in Glenair
Signature Series
79 rectangular
packaging
optimize SWaP in
mission-critical
mil-aero
applications




Connector series supports
both ribbon and round
cable, as well as standard
and expanded-beam
MT ferrules

- Small form-factor, high-density fiber optic solution for rugged mil-aero applications
- Temperature tolerance from -40°C to +85°C
- Optimized for use with parallel optic transceivers in ribbon or round cable applications
- Designed for optimal low insertion loss performance in high vibration and shock environments

ULTRA HIGH-DENSITY Rugged MT Fiber Optic Connectors



Signature fiber optic connection system:
miniature Series 79 packaging

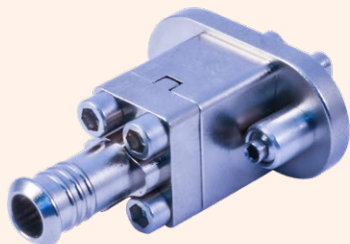

-06 plug, with retaining plate for EMI shield termination and strain relief of ribbon or round fiber cable



-S7 receptacle with standard retaining plate



-S7 receptacle with conductive EMI gasket


ABOUT SERIES 79 MT FIBER OPTIC CONNECTORS

Designed in accordance with rugged mil-aero industry specifications, the Glenair Series 79 MT fiber optic connector is the world's smallest ruggedized MT connector solution. High-density MT ferrules are packaged in precision-machined rectangular aluminum shells with electroless nickel finish, or passivated stainless steel shells for higher temperature applications. Receptacles may be equipped with optional EMI gaskets, and mate bottom-to-bottom with plug assemblies for robust resistance to vibration and shock. Designed for harsh-environment, inside-the-box use in parallel optics, fiber optic backplanes, missile systems, spacecraft and satellites, heads-up displays, and other ribbonized or flex-circuit fiber optic datalinks, the Series 79 MT delivers superior low insertion-loss performance (up to 500 mating cycles). Connectors are supplied in single (consult factory for dual and quad) MT configurations with banding platform or ultra low-profile retaining plate options.

The MT Ferrule High-Density Advantage



24 fibers



3 fibers

Up to 24 fibers in a single compact, lightweight ferrule (7mm x 3mm / .276" x .118") —same real estate as three size #16 termini side by side

PARALLEL OPTICAL TRANSCEIVERS




Glenair's rugged, small form-factor parallel optical transceivers are the ideal solution for board-level optical-to-electrical conversion utilizing MT fiber optic ferrules.

Series 79 MT Ferrule Fiber Optic Connector Performance Specifications per QTP-773 and Test Report GT-19-111


Test Description	Test Results
Optical Insertion Loss, multimode (consult factory for singlemode)	50/125 μ m fiber @ 850 nm: ≤ 0.15 dB average; 0.31 dB typical 50/125 μ m fiber @ 1300 nm: ≤ 0.21 dB average; 0.38 dB typical
Temperature Cycling: per TIA/EIA-455-3, Test Condition C-2	- 40°C to +85°C, 5 Cycles, 56 hours Max. CIT = .25 dB; Max. IL post-test = .30 dB
Mating Durability	First 100 cycles with CIT measured every 10 cycles Max. CIT = 0.12 dB; Max. IL post-test = 0.20 dB
Mating Durability, Extended	From 101st cycle to 500th cycle with CIT measured every 25 cycles Max. CIT = 0.21 dB; Max. IL post-test = 0.30 dB
Physical Shock 1: 50g Peak, 11 ms duration, per TIA/EIA-455-14, Test Condition E	Max. CIT = 0.14 dB; Max. IL post-test = 0.42 dB; discontinuity ≤ 0.5 dB @ <1 us.
Physical Shock 2: 160g Peak, 4 ms duration, per MIL-STD-202, Method 213	Max. CIT = 0.04 dB; Max. IL post-test = 0.40 dB; discontinuity ≤ 0.5 dB @ <1 us.
Additional Physical Shock: 300g Peak, 0.5 ms duration, per MIL-STD-883E, Method 2002.4 (30 shocks total)	Max. CIT = .15 dB; Max. IL post-test = 0.20 dB; discontinuity ≤ 0.5 dB @ <1 us.
Vibration 1: 5-15 Hz, .12" double amplitude, 2 hours/axis (6 hours total) per MIL-STD-202, test condition 201, Sinusoidal	Max. CIT = 0.06 dB; Max. IL post-test = 0.37 dB
Vibration 2: 20g Peak, 10-2,000 Hz, 4 hours/axis (12 hours total) per TIA-455-11, Test Condition IV, Sinusoidal	Max. CIT = 0.08 dB; Max. IL post-test = 0.43 dB
Weight	Plug with Ferrule kit 5.5 grams · Receptacle with Ferrule kit 7.5 grams

SERIES 79 MINIATURE MT Fiber Optic Connectors


How To Order Series 791 MT Ferrule Fiber Optic connectors




Receptacle with female MT ferrule,
available with or without EMI gasket



Receptacle with female MT ferrule,
retaining plate, and banding
platform




Plug with male MT ferrule and
retaining plate



Plug with male MT ferrule with
retaining plate and banding
platform

How To Order Glenair 183-003 Series 79 MT Fiber Optic Connectors					
Sample Part Number		183-003	ME	-06	-L -1
Basic Number	Series 79 Single MT Fiber Optic Connector				
Material / Finish	ME = Al Alloy / Electroless Nickel ZR = Al Alloy / Zinc Nickel, Black NF = Al Alloy / Cadmium, O.D. Z1 = Stainless Steel / Passivate				
Connector Type	-06 = Plug (used with male MT ferrule) -07 = Receptacle (used with female MT ferrule) -S7 = Receptacle with EMI gasket (used with female MT ferrule)				
Mounting Hardware	Hardware for PLUGS Rear Panel Mount Jackposts for RECEPTACLES: -L = Hex Head Jackscrew, non-removable -X = for .031" panel thickness -B = Thru-Hole -W = for .047" panel thickness -V = for .062" panel thickness -T = for .094" panel thickness				
Retaining Plate / Banding Platform	-1 = 12 or 24 channel without banding platform -2 = 12 or 24 channel with banding platform for EMI shield termination and strain relief				

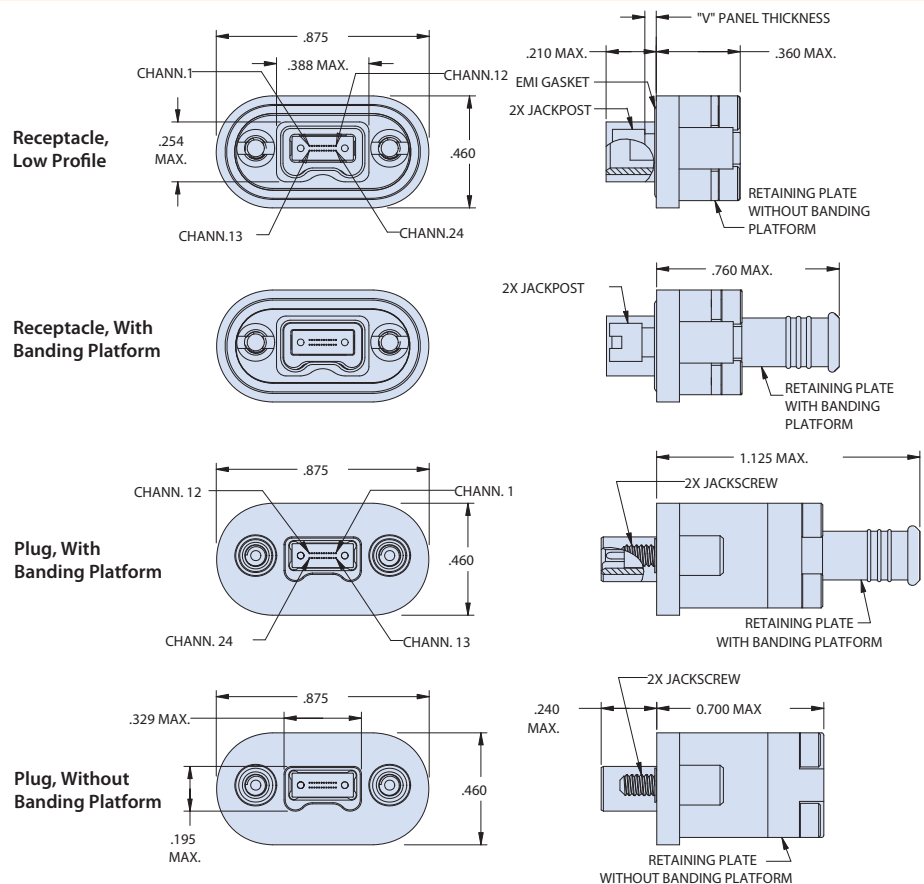

MATERIAL/FINISH/NOTES

Mounting hardware: stainless steel / passivated


EMI gasket (optional): conductive silicone

Additional materials, finishes, connector configurations (dual and quad layouts), and hardware options are available, consult factory

SERIES 79 MINIATURE MT Fiber Optic Connectors



How To Order MT Ferrule Kits and Series 79 MT to MT Ferrule Cable Assembly

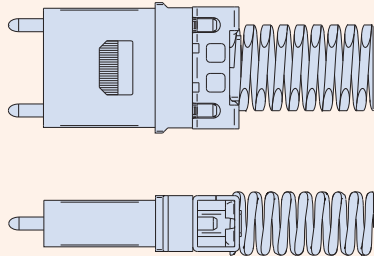


MATERIAL/FINISH

- Ferrule: Polyphenylene Sulfide Resin
- Pin Clamp, Spring: Stainless Steel
- Boot: TPE

How To Order MT Ferrule Kits				
Sample Part Number	181-133	-126	-12	P
Basic Part Number	MT Ferrule kit			
Fiber type	-126, -1253, -1253A (See Table I)			
Number of Fibers	-12, -24 (See Table I)			
Ferrule Style	P = Male (use with Plug) S = Female (use with Receptacle)			

Table I						
Dash No.	Fiber Type	End Face	Fiber Size Core/Cladding	No. of Fibers	Ferrule Identification	Pin Clamp Identification (Male Kit only)
-126	MM	PC	50/125 62.5/125	12 24	M-ME12 M-ME24	1 Through Hole
-1253	SM	PC	9/125	12	E-E12	2 Through Holes
-1253A	SM	APC	9/125	12	E-E12	2 Through Holes

How To Order Series 79 MT Ferrule Fiber Optic Cable Assemblies											
Sample Part Number	FA07364	-06	-17	ME	-B4	-50	-L	-1	-0036	-L	
Basic Number	Series 79 MT Ferrule Fiber Optic Cable Assembly										
A Connector Type	-06 = Sr. 79 Plug (used with male MT ferrule) -07 = Sr. 79 Receptacle (used with female MT ferrule) -S7 = Sr. 79 Receptacle with EMI gasket (used with female MT ferrule)										
B Connector Type	-06 = Sr. 79 Plug (used with male MT ferrule) -07 = Sr. 79 Receptacle (used with female MT ferrule) -S7 = Sr. 79 Receptacle with EMI gasket (used with female MT ferrule) -12 = ST Connector -13 = FC Connector -14 = SC Connector -15 = GC Connector -16 = LC Connector -17 = MT Connector (male) -18 = MT Connector (female) -19 = MTP Connector (male) -20 = MTP Connector (female)										
Material / Finish (-06, -07, -S7)	ME = Al Alloy, Electroless Nickel NF = Al Alloy, Cad/Olive Drab ZR = Al Alloy, Zinc-Nickel, Black Z1 = Stainless Steel, Passivate										
Fiber Qty. / Type	-B2 = 12 bare ribbon fibers -B4 = 24 bare ribbon fibers (Multimode only) -R2 = 12 round ribbon fibers -R4 = 24 round ribbon fibers (Multimode only)										
Fiber Size	-09 = 9.3/125 Singlemode -50 = 50/125 Multimode -62 = 62.5/125 Multimode										
Mounting Hardware	Plug -L = Hex head jackscrow, non-removable -B = Thru-hole Receptacle -X = Rear-panel jackpost, .031" thickness -W = Rear-panel jackpost, .041" thickness -V = Rear-panel jackpost, .062" thickness -T = Rear-panel jackpost, .094" thickness										
Banding Platform (-06, -07, -S7)	-1 = without banding platform -2 = with banding platform										
Length	In inches (e.g. -0036 = 36 inches)										
Protective Cover	L = supplied less covers Omit = supplied with covers										

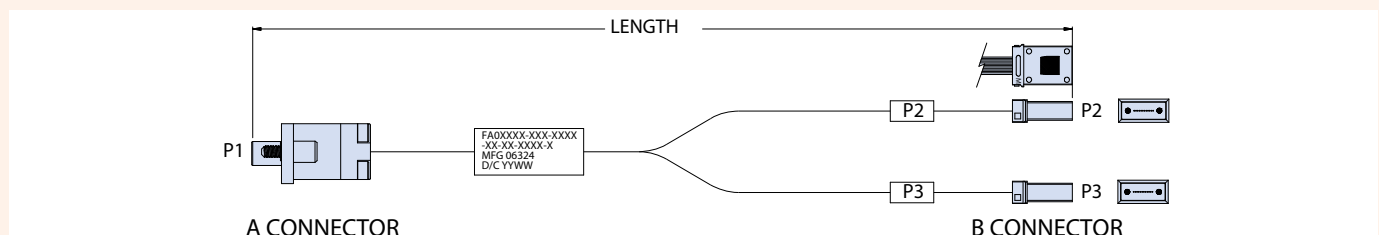

Optical performance note: Insertion loss to be less than 1.5 dB when measured at 1310 nm wavelength for singlemode, or when measured at 850 nm for multimode

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular MIL Spec Connector](#) ***category:***

Click to view products by [Glenair](#) ***manufacturer:***

Other Similar products are found below :

[89075GULPR](#) [0025-262-542](#) [0025-263-3014](#) [0025-264-3014](#) [0031-065-002](#) [0031-071-002](#) [58-570121-04S](#) [58-584653-12P](#) [0134-201-1007](#)
[0134-202-0800](#) [0134-202-1200](#) [0134-202-2407](#) [0134-207-1206](#) [0134-207-1800](#) [0134-207-2207](#) [0134-213-0806](#) [0134-213-1007](#) [0134-213-](#)
[1009](#) [0134-213-1200](#) [0134-213-1208](#) [0134-213-1800](#) [0134-213-2209](#) [0025-258-000](#) [0025-259-542](#) [0031-066-002](#) [0031-068-002](#) [0031-069-](#)
[002](#) [0031-070-002](#) [0031-072-002](#) [015-9516-002](#) [020313-0043](#) [020340-0009](#) [020418-0036](#) [020419-0080](#) [020419-0120](#) [020420-0108](#) [60-](#)
[042217-10P](#) [0104-201-2402](#) [0114-201-1278](#) [024251-0015](#) [602GB06EG1832SN](#) [0134-201-1207](#) [0134-201-1410](#) [0134-201-1806](#) [0134-201-](#)
[2006](#) [0134-201-2007](#) [0134-201-2010](#) [0134-201-2200](#) [0134-202-1400](#) [0134-207-0809](#)