

233-210 PCB wall mount receptacles with threaded standoff MIL-DTL-38999 Series III type

B

Part Number Development						
Sample Part Number	233-210	-00	NF	17-8	P	N
Series / Basic Part No.	SuperNine PCB receptacle with threaded standoffs					
Connector Style*	00 = Wall Mount Receptacle with Slotted Holes, Standard Stand-off Thread 10 = Wall Mount Receptacle with Slotted Holes, Metric Stand-off Thread CM = Wall Mount Receptacle with Metric Clinch Nuts CS = Wall Mount Receptacle with Standard Clinch Nuts HM = Wall Mount Receptacle with Metric Helicoils HS = Wall Mount Receptacle with Standard Helicoils					
Finish	NF = Al alloy/cadmium olive drab MT = Al alloy/nickel PTFE Consult factory for additional finish options ME = Al alloy/electroless nickel ZR = Al alloy/black zinc nickel					
Shell Size-Insert Arrangement*	Per MIL-STD-1560					
Contact Type	P = Pin, Gold, 1500 cycles S = Socket, Gold, 1500 cycles H = Pin, Pd/Ni, 1500 cycles J = Socket, Pd/Ni, 1500 cycles					
Alternate Polarization*	A, B, C, D, E, N = Normal (IAW MIL-DTL-38999 Series III)					

*Refer to Section A for complete details

Dimensions														
Shell Size code	Shell Size	A Thd -0.1P-0.3L- TS-2A	B Sq	B' Sq	C Bsc	D Bsc³	E	F	G	G'	H Bsc	ØJ Min	L Thd	L' Thd
A	9	.6250	.948 (24.08) .925 (23.50)	1.094 (27.79) 1.054 (26.77)	.719 (18.26)	.594 (15.09)	.136 (3.45) .120 (3.05)	.224 (5.69) .208 (5.28)	.122 (3.10) .083 (2.11)	.179 (4.55) .140 (3.56)	.594 (15.09)	.340 (8.64)	.112-40 UNC	M3X0.5
B	11	.7500	1.043 (26.49) 1.019 (25.88)	1.187 (30.15) 1.147 (29.13)	.812 (20.62)	.719 (18.26)		.202 (5.13) .186 (4.72)			.719 (18.26) (11.89)			
C	13	.8750	1.137 (28.88) 1.114 (28.30)	1.281 (32.54) 1.241 (31.52)	.906 (23.01)	.812 (20.62)		.812 (20.62) (14.53)						
D	15	1.0000	1.232 (31.29) 1.208 (30.68)	1.344 (34.14) 1.304 (33.12)	.969 (24.61)	.906 (23.01)		.906 (23.01) (17.91)						
E	17	1.1875	1.323 (33.60) 1.299 (32.99)	1.437 (36.50) 1.397 (35.48)	1.062 (26.97)	.969 (24.61)		1.030 (26.16) (21.08)						
F	19	1.2500	1.449 (36.80) 1.425 (36.20)	1.531 (38.89) 1.491 (37.87)	1.156 (29.36)	1.062 (26.97)		1.150 (29.21) (23.72)						
G	21	1.3750	1.575 (40.00) 1.551 (39.40)	1.625 (41.28) 1.585 (40.26)	1.250 (31.75)	1.156 (29.36)		.202 (5.13) .186 (4.72)			.153 (3.89) .114 (2.90)	.190 (4.83) .170 (4.32)		
H	23	1.5000	1.701 (43.21) 1.677 (42.60)	1.750 (44.45) 1.710 (43.43)	1.375 (34.92)	1.250 (31.75)	1.360 (34.54) (29.46)							
J	25	1.6250	1.823 (46.30) 1.799 (45.69)	1.875 (47.63) 1.835 (46.61)	1.500 (38.10)	1.375 (34.92)	1.475 (37.47) (33.20)							

* Front panel mount only








NOTES

- 233-210 receptacle connector is designed to meet or exceed the mechanical, dimensional, electrical, environmental requirements of D38999/20 and MIL-STD-1560 except as shown and/or noted. Receptacle mates with 233-205/206 or any QPL manufacturer's D38999/26 Series III plug having the same shell size, insert arrangement and polarization.
- Insert arrangements IAW MIL-STD-1560. Contact manufacturer for additional arrangement options
- Front panel mount only
- 233-210 receptacle connector is designed with fixed PC tail contacts. Connector potting process meets or exceeds ingress protection rating IP67 and is environmentally sealed with a leak rate of $< 1 \times 10^{-4}$ ccHe/sec in an unmated condition.
- 233-210 receptacle connector is designed to withstand a minimum of 1500 mating durability cycles when mated to a SuperNine® plug and appropriate contacts. Contact finish should be the same for both mating connectors to optimize performance.

233-210 PCB wall mount receptacles with threaded standoff MIL-DTL-38999 Series III type

B

00, 10, CM, CS, HM AND HS - WALL MOUNT RECEPTACLES

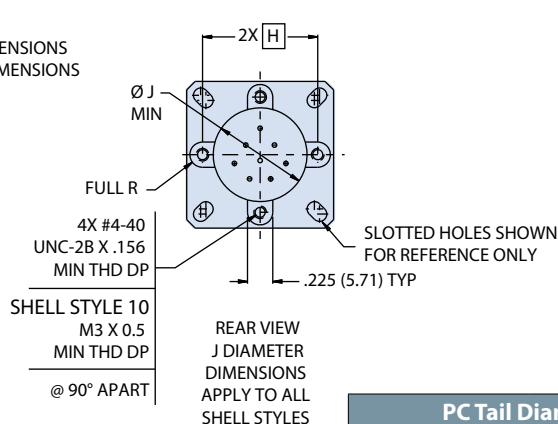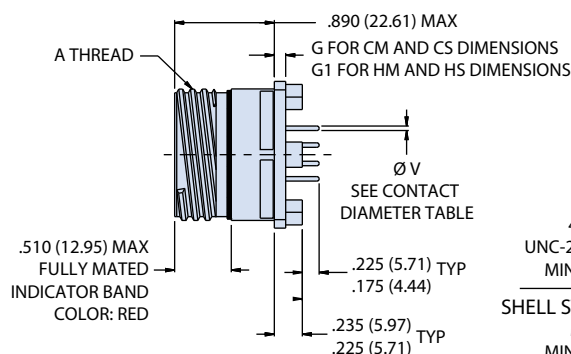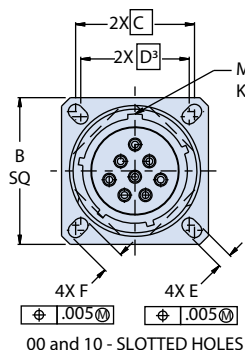

NOTES (CONTINUED)

6. Material/finish
 - Shell, jam-nut: see part number development, finish
 - Contacts: copper alloy/see part number development, finish
 - Insulators: high grade rigid dielectric/N.A.
 - Seals: fluorosilicone blend/N.A.
 - Potting: epoxy/N.A.
 - O-ring: silver plated aluminum in fluorosilicone (cho-seal 1298 or equivalent)

PC Tail Diameter	
Contact Size	ØV
23	.020 (.51) .018 (.46)
22	.020 (.51) .018 (.46)
20	.030 (.76) .028 (.71)
16	.040 (1.02) .038 (.97)
12	.072 (1.83) .070 (1.78)

233-210-07 PCB jam-nut mount receptacle with thd standoff MIL-DTL-38999 Series III type

B


Part Number Development						
Sample Part Number	233-210	-07	NF	17-8	P	N
Series / Basic Part No.	SuperNine PCB receptacle with threaded standoffs					
Connector Style*	07 = Jam-Nut Mount Receptacle with Standard Stand-off Thread 17 = Jam-Nut Mount Receptacle with Metric Stand-off Thread					
Finish	NF = Al alloy/cadmium olive drab MT = Al alloy/nickel PTFE Consult factory for additional finish options ME = Al alloy/electroless nickel ZR = Al alloy/black zinc nickel					
Shell Size-Insert Arrangement*	Per MIL-STD-1560					
Contact Type	P = Pin, Gold, 1500 cycles S = Socket, Gold, 1500 cycles H = Pin, Pd/Ni, 1500 cycles J = Socket, Pd/Ni, 1500 cycles					
Alternate Polarization*	A, B, C, D, E, N = Normal (IAW MIL-DTL-38999 Series III)					

Dimensions											
Shell Size Code	Shell Size	A Thd -0.1P-0.3L- TS-2A	Ø B	C Sq	D Flat	E Thread ISO Metric	F	G Bsc	ØH Min	Threads	
										M	M'
A	9	.6250	1.200 (30.48) 1.178 (29.92)	1.078 (27.38) 1.236 (31.39)	.654 (16.61) .645 (16.38)	M17 X 1.0-6g	.122 (3.10) .083 (2.11)	.594 (15.09)	.340 (8.64)	.112-40 UNC	M3 x .05
B	11	.7500	1.386 (35.20) 1.362 (34.59)	1.268 (32.21) 1.236 (31.39)	.755 (19.18) .745 (18.92)	M20 X 1.0-6g		.719 (18.26)	.468 (11.89)		
C	13	.8750	1.512 (38.40) 1.488 (37.80)	1.390 (35.31) 1.358 (34.49)	.942 (23.93) .932 (23.67)	M25 X 1.0-6g		.812 (20.62)	.572 (14.53)		
D	15	1.0000	1.638 (41.61) 1.614 (41.00)	1.516 (38.51) 1.484 (37.69)	1.066 (27.08) 1.056 (26.82)	M28 X 1.0-6g		.906 (23.01)	.705 (17.91)		
E	17	1.1875	1.764 (44.81) 1.740 (44.20)	1.642 (41.71) 1.610 (40.89)	1.191 (30.25) 1.181 (30.00)	M32 X 1.0-6g*		1.030 (26.16)	.830 (21.08)		
F	19	1.2500	1.949 (49.50) 1.925 (48.90)	1.827 (46.41) 1.795 (45.59)	1.316 (33.43) 1.306 (33.17)	M35 X 1.0-6g	.153 (3.89) .114 (2.90)	1.150 (29.21)	.934 (23.72)		
G	21	1.3750	2.075 (52.71) 2.051 (52.10)	1.953 (49.61) 1.921 (48.79)	1.441 (36.60) 1.431 (36.35)	M38 X 1.0-6g		1.221 (31.01)	1.055 (26.80)		
H	23	1.5000	2.201 (55.91) 2.177 (55.30)	2.079 (52.81) 2.047 (51.99)	1.566 (39.78) 1.556 (39.52)	M41 X 1.0-6g		1.360 (34.54)	1.160 (29.46)		
J	25	1.6250	2.323 (59.00) 2.299 (58.39)	2.205 (56.01) 2.173 (55.19)	1.691 (42.95) 1.681 (42.70)	M44 X 1.0-6g		1.475 (37.47)	1.307 (33.20)		

* Modified major diameter 31.95 - 31.80 (1.257 - 1.252).

233-210-07 PCB jam-nut mount receptacle with thd standoff MIL-DTL-38999 Series III type

07 - JAM-NUT MOUNT RECEPTACLE

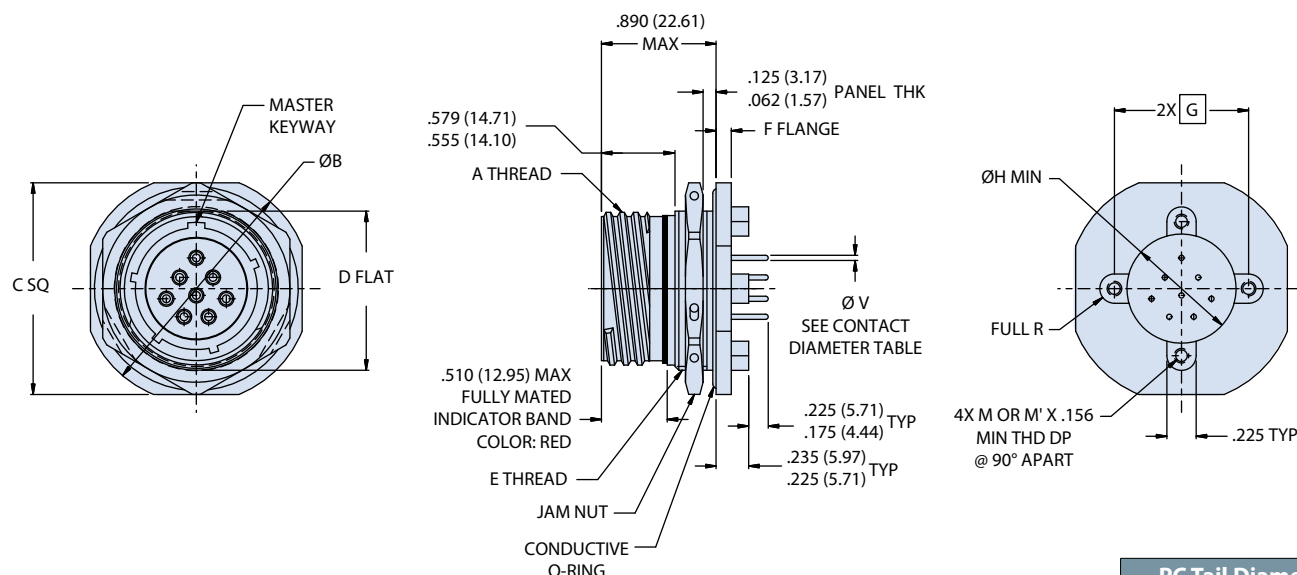

NOTES

- 233-210-07 receptacle connector is designed to withstand a minimum of 1500 mating durability cycles when mated to a "SuperNine" plug and appropriate contacts. Contact finish should be the same for both mating connectors to optimize performance.
- 233-210-07 is designed to meet or exceed the mechanical, dimensional, electrical, environmental requirements of D38999/24 and MIL-STD-1560 except as shown and/or noted.
- Receptacle mates with 233-205/206 or any QPL manufacturer's D38999/26 Series III plug having the same shell size, insert arrangement and polarization.
- Insert arrangements IAW MIL-STD-1560.
- Supplied with fixed PC tail contacts. Potting meets or exceeds IP67 in unmated condition.
- Dimensions in Inches (millimeters) are subject to change without notice.
- Consult factory for additional information.
- Material/finish
 - Shell, lockring, jam-nut: see part number development, finish
 - Contacts: copper alloy/see part number development, contact type
 - Insulators: high-grade rigid dielectric/N.A.
 - Seals: fluorosilicone blend/N.A.
 - Potting: epoxy/N.A.
 - O-ring: silver plated aluminum in fluorosilicone (cho-seal 1298 or equivalent)

PC Tail Diameter	
Contact Size	ØK
23	.020 (.51) .018 (.46)
22	.020 (.51) .018 (.46)
20	.030 (.76) .028 (.71)
16	.040 (1.02) .038 (.97)
12	.072 (1.83) .070 (1.78)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular MIL Spec Connector](#) ***category:***

Click to view products by [Glenair](#) ***manufacturer:***

Other Similar products are found below :

[0025-262-542](#) [0025-264-3014](#) [58-570121-04S](#) [0134-202-1200](#) [0134-207-1206](#) [0134-207-1800](#) [0134-207-2207](#) [0134-213-0806](#) [0134-213-1007](#) [0134-213-1009](#) [0134-213-1208](#) [0134-213-1800](#) [0134-213-2209](#) [0025-258-000](#) [015-9516-002](#) [60-042722-19P](#) [0114-201-1278](#) [602GB06EG24-61SN](#) [0134-201-1207](#) [0134-201-1806](#) [0134-201-2006](#) [0134-201-2007](#) [0134-201-2010](#) [0134-202-1400](#) [0134-207-0809](#) [0134-207-1208](#) [0134-207-2009](#) [0134-213-1006](#) [6104-207-2302](#) [6104-208-1902](#) [6131-202-19149P](#) [6131-204-21149P](#) [6131-207-13149P](#) [6131-208-13149P](#) [6131-209-17149P](#) [6131-210-11149P](#) [6131-211-19149P](#) [6131-216-19149P](#) [6131-220-25149P](#) [6131-259-11149P](#) [6131-259-21149P](#) [6131-259-23149P](#) [6131-263-19149P](#) [6131-265-17149P](#) [6131-265-19149P](#) [CS3102A-20-15P](#) [CS3102A-20-15S](#) [CS3102C18-4P-472](#) [CS3106A-20-29P](#) [CS3106A-20-74P](#)