



450-001

Qwik-Ty® Strain Relief - Connector Designator A Rotatable Coupling (Straight, 45° and 90° Elbows)



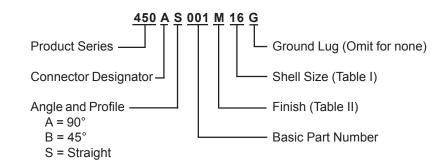

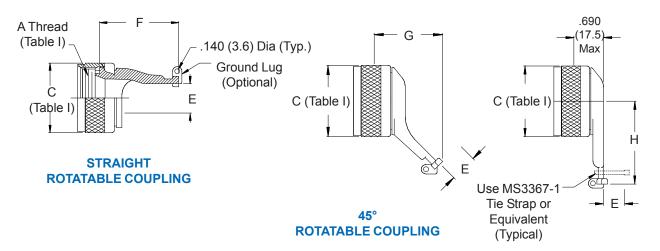

90° ROTATABLE COUPLING

See inside back cover fold-out or pages 13 and 14 for Tables I and II.

TABLE III: DIMENSIONS								
Shell	E		F		G		Н	
Size	Cable Entry		Max		Max		Max	
08	.260	(6.6)	.866	(22.0)	1.066	(27.1)	.890	(22.6)
10	.365	(9.3)	.866	(22.0)	1.066	(27.1)	.950	(24.1)
12	.501	(12.7)	.926	(23.5)	1.066	(27.1)	1.010	(25.7)
14	.575	(14.6)	1.106	(28.1)	1.188	(30.2)	1.330	(33.8)
16	.700	(17.8)	1.106	(28.1)	1.226	(31.1)	1.390	(35.3)
18	.779	(19.8)	1.176	(29.9)	1.226	(31.1)	1.460	(37.1)
20	.904	(23.0)	1.306	(33.2)	1.226	(31.1)	1.510	(38.4)
22	1.029	(26.1)	1.426	(36.2)	1.226	(31.1)	1.570	(39.9)
24	1.144	(29.1)	1.556	(39.5)	1.226	(31.1)	1.640	(41.7)

- 1. Cable Entry is defined as the accommodation entry for the wire bundle or cable. Dimensions are not intended for inspection criteria.
- 2. Metric dimensions (mm) are indicated in parentheses.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Circular MIL Spec Backshells category:

Click to view products by Glenair manufacturer:

Other Similar products are found below:

5M2919-3DW 5M2920-3CW 5M2953-1HW 60-036152-022 610HS012M15 M28840/504WA M28840/805WB M28840/809WA M28840/815WA M28840/816WA 627AS017M14 62GB5851608S 655HS002NF11 CW3703-000 CW3899-000 M85049/10-134S M85049/10-17S M85049/10-33S M85049/10-94W M85049/11-09W M85049/11-28N M85049/11-37N M85049/11-53N M85049/11-63N M85049/118-20W M85049/124-23W M85049/124S09W M85049/126S23W M850491712W02 M85049/1720N04B M85049/1817N06 M850491819W03 M85049/1821W05C M85049/1825W06C M85049/1919N05 M85049/1919W04 M850491919W07 M85049/23-59W M85049/23-74W M8504924-5W M85049/24-71N M85049/25-47N M85049/25-94W M85049/27S12N M8504938-13S M85049/38-19S M85049/39-11S M85049/39-17S M85049/39-9S M85049/3W4A2