

Series 804 Receptacles With PCB or Solder Cup Contacts



**Series 804 Printed
Circuit Board Receptacle**



Series 804 Receptacles feature factory-installed non-removable contacts. Connectors are backfilled with rigid epoxy for a watertight seal.

Series 804 QDC Receptacles are available in two jam nut shell styles. **Style 00** for front panel mounting; and **Style 07** for rear panel mounting.

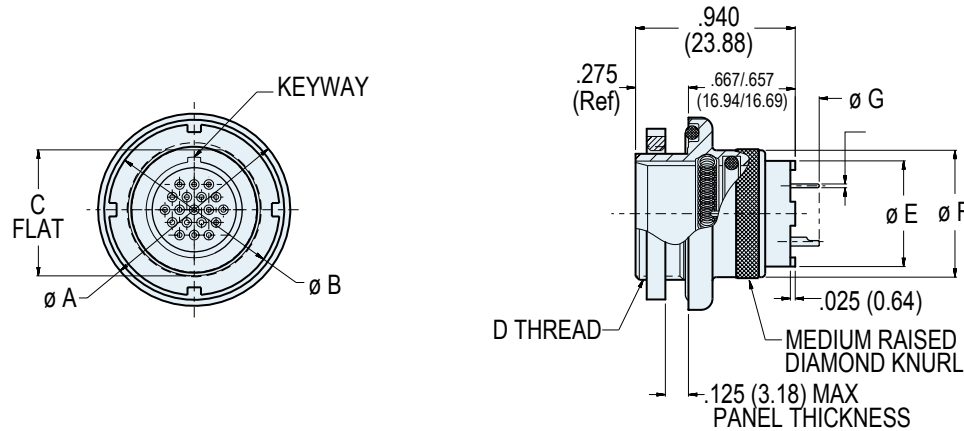
PCB Contacts feature .020" (0.5mm) diameter gold-plated tails for solder termination to rigid or flexible circuits.

Solder Cup Contacts accept up to #22 AWG stranded wire.

HOW TO ORDER SERIES 801 PRINTED CIRCUIT BOARD RECEPTACLES

Sample Part Number					
804-005	-07	NF	9-4	E	
Series	Shell Style	Shell Material / Finish	Shell Size- Insert Arrangement	Contact Type	Shell Key Position
804-005 Receptacle with Solder Cup Contacts or PC Tails	 -00 Jam Nut, Front Panel	C Aluminum / Black Anodize	5-3 3 #23	P Pin, PC Tail	Omit for Single Master Key
		M Aluminum / Electroless Nickel	6-1 1 #16		
		NF Aluminum / Cadmium with Olive Drab Chromate	6-4 4 #23		
			6-7 7 #23		
			7-1 1 #12	S Socket, PC Tail	A Pos. A (Normal)
	 -07 Jam Nut, Rear Panel	ZN Aluminum / Zinc-Nickel with Olive Drab Chromate	7-10 10 #23		
			8-13 13 #23		
		ZNU Aluminum / Zinc-Nickel with Black Chromate	9-4 4 #16	E Pin, Solder Cup	B Pos. B
			9-19 19 #23		C Pos. C
		Z1 Stainless Steel	10-26 26 #23	F Socket, Solder Cup	D Pos. D
			12-2 2 #12		
			12-37 37 #23		
			14-55 55 #23		
			15-85 85 #23		

Series 804 PCB/Solder Receptacles – Rear Panel Jam Nut



Rear Panel Jam Nut
804-005-07

DIMENSIONS

Shell Size	Ø A		Ø B		C Flat		D Threads	Ø E		Ø F		Ø G Tail Dia.
	In.	mm.	In.	mm.	In.	mm.		In.	mm.	In.	mm.	
5	.790	20.07	.562	14.27	.415	10.54	.4375-32 UN-2A	.244	6.20	.450	11.43	#23 .018/.022 (0.46/0.56)
6	.830	21.08	.625	15.87	.467	14.40	.5000-32 UN-2A	.330	8.38	.520	13.21	
7	.910	23.11	.750	19.05	.594	15.09	.6250-28 UN-2A	.432	10.97	.580	14.73	
8	.955	24.26	.750	19.05	.594	15.09	.6250-28 UN-2A	.493	12.52	.603	15.32	#16 .060/.064 (1.52/1.63)
9	1.000	25.40	.812	20.62	.655	16.64	.6875-28 UN-2A	.551	14.00	.695	17.65	
10	1.085	27.48	.875	22.22	.721	18.31	.7500-28 UN-2A	.620	15.75	.735	18.67	
12	1.180	29.97	1.000	25.40	.843	21.41	.8750-28 UN-2A	.703	17.86	.880	22.35	#12 .092/.096 (2.34/2.44)
14	1.325	33.66	1.125	28.57	.968	24.59	1.0000-28 UN-2A	.863	21.92	1.010	25.65	
15	1.390	35.31	1.188	30.17	1.029	26.14	1.0625-20 UN-2A	.912	23.16	1.060	26.92	

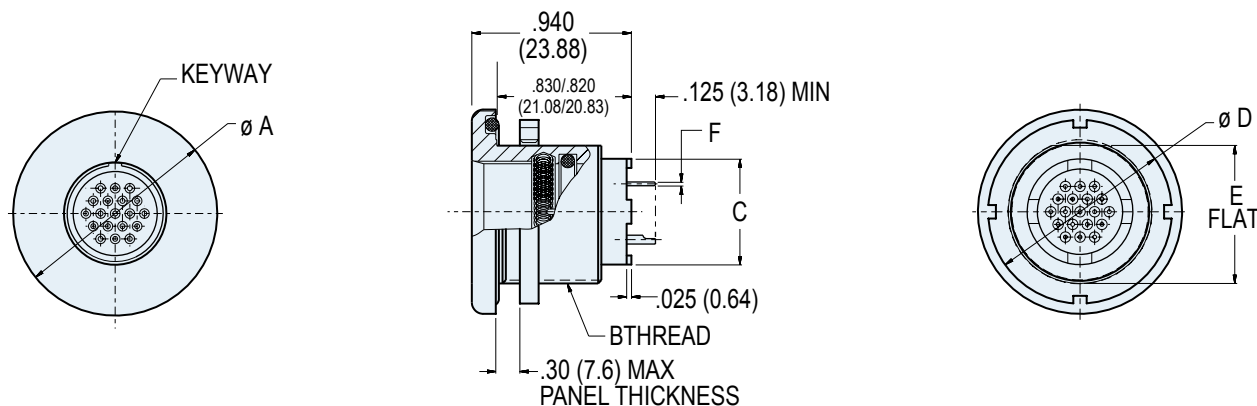
ALTERNATE KEY POSITIONS

Pos.	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°

JAM NUT PANEL CUTOUT

Shell Size	A Flat		Ø B	
	In. ± .002	mm. ± 0.05	In.	mm.
5	.425	10.80	.448	11.38
6	.477	12.12	.510	12.95
7	.604	15.34	.635	16.13
8	.604	15.34	.635	16.13
9	.665	16.89	.695	17.65
10	.731	18.57	.760	19.30
12	.853	21.67	.885	22.48
14	.978	24.84	1.010	25.65
15	1.039	26.39	1.070	27.18


Series 804 PCB/Solder Receptacles – Front Panel Jam Nut



Front Panel Jam Nut
804-005-00

DIMENSIONS										
Shell Size	Ø A		B Threads	Ø C		Ø E		E Flat		Ø F Tail Dia.
	In.	mm.		In.	mm.	In.	mm.	In.	mm.	
5	.830	21.08	.5000-32 UN-2A	.244	6.20	.625	15.87	.470	11.94	#23 .018/.022 (0.46/0.56)
6	.885	22.48	.5625-28 UN-2A	.330	8.38	.688	17.47	.530	13.46	
7	.995	25.27	.6875-28 UN-2A	.432	10.97	.812	20.62	.663	16.84	
8	.995	25.27	.6875-28 UN-2A	.493	12.52	.812	20.62	.663	16.84	#16 .060/.064 (1.52/1.63)
9	1.075	27.31	.7500-28 UN-2A	.551	14.00	.875	22.22	.720	18.29	
10	1.140	28.95	.8125-28 UN-2A	.620	15.75	.938	23.82	.788	20.02	#12 .092/.096 (2.34/2.44)
12	1.340	34.04	1.0000-28 UN-2A	.703	17.86	1.125	28.57	.970	24.64	
14	1.390	35.31	1.0625-20 UN-2A	.863	21.92	1.188	30.18	1.020	25.91	
15	1.450	36.83	1.1250-28 UN-2A	.912	23.16	1.250	31.75	1.093	27.76	

ALTERNATE KEY POSITIONS

	Pos.	A°		B°	
		In.	mm.	In.	mm.
	A	150°	210°		
	B	75°	210°		
	C	95°	230°		
	D	140°	275°		

JAM NUT PANEL CUTOUT

Shell Size	A Flat		Ø B	
	In. ± .002	mm. ± 0.05	In.	mm.
5	.480	12.19	.510	12.95
6	.540	13.72	.575	14.61
7	.674	17.12	.698	17.73
8	.674	17.12	.698	17.73
9	.730	18.54	.760	19.30
10	.799	20.29	.822	20.88
12	.980	24.89	1.010	25.65
14	1.030	26.16	1.075	27.31
15	1.013	25.73	1.135	28.83

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular MIL Spec Connector](#) category:

Click to view products by [Glenair](#) manufacturer:

Other Similar products are found below :

[0025-262-542](#) [0025-264-3014](#) [58-570121-04S](#) [0134-202-1200](#) [0134-207-1206](#) [0134-207-1800](#) [0134-207-2207](#) [0134-213-0806](#) [0134-213-1007](#) [0134-213-1009](#) [0134-213-1208](#) [0134-213-1800](#) [0134-213-2209](#) [0025-258-000](#) [015-9516-002](#) [60-042722-19P](#) [0114-201-1278](#) [602GB06EG24-61SN](#) [0134-201-1207](#) [0134-201-1806](#) [0134-201-2006](#) [0134-201-2007](#) [0134-201-2010](#) [0134-202-1400](#) [0134-207-0809](#) [0134-207-1208](#) [0134-207-2009](#) [0134-213-1006](#) [6104-207-2302](#) [6104-208-1902](#) [6131-202-19149P](#) [6131-204-21149P](#) [6131-207-13149P](#) [6131-208-13149P](#) [6131-209-17149P](#) [6131-210-11149P](#) [6131-211-19149P](#) [6131-216-19149P](#) [6131-220-25149P](#) [6131-259-11149P](#) [6131-259-21149P](#) [6131-259-23149P](#) [6131-263-19149P](#) [6131-265-17149P](#) [6131-265-19149P](#) [CS3102A-20-15P](#) [CS3102A-20-15S](#) [CS3102A-20-82P](#) [CS3102A-28-15S](#) [CS3102C18-4P-472](#)