

TABLE I				TABLE II				TABLE III			
DASH NO	SHELL SIZE	A THREAD CLASS 2A	B DIA ±.031	CLAMP SIZE	CABLE RANGE MIN	CABLE RANGE MAX	ITEM 7 SIZE LG	SYM	FINISH	DESCRIPTION	APPROVED
9	12	1/2-20 UNF	.593	1	.062	.125	.750	A	CADMIUM PLATE/BRIGHT DIP	REV PER EO 00029	DATE 12-7-67
12	15	1/4-20 UNF	.812	2	.125	.250	.937	B	QQ-P-416, TYPE I, CLASS 3	REV PER EO 00029	2-26-68
15	18	1/4-20 UNF	.937	3	.250	.375	1.031	C	CAD PLATE/OLIVE DRAB	REV PER DCN 00301	6-10-68
18	18	1-28 UN	1.156	4	.312	.500	1.125	D	QQ-P-416, TYPE II, CLASS 3	REV PER DCN 00301	11-7-68
				5	.437	.625	1.187	E	IRIDITE/GOLD, MIL-C-5541, TYPE I, GRADE C, CLASS 3	REV PER DCN 01400	12-11-68
				6	.562	.750	1.312	F	HARD CHROME	REVISED PER DCN 03485	11-27-68
				7	.687	.875	1.437	G	QQ-C-320, TYPE II, CLASS 2A	REVISED PER DCN 07112	3-31-68
				8	.812	1.000	1.562	H	CAD PLATE/BRIGHT DIP	REVISED PER DCN 07609	10-18-68
				9	.937	1.125	1.687	I	ELECTROLESS NICKEL		
				10	1.062	1.250	1.812	J	ELECTROLESS NICKEL		
				11	1.187	1.375	2.187	K	MIL-C-26074A, CLASS 1		
				12	1.312	1.500	2.281	L	CAD PLATE/OLIVE DRAB		
				13	1.437	1.625	2.406	M	NICKEL (QQ-N-290)		
				14	1.562	1.750	2.531	N	NICKEL PLATE		
				15	1.687	1.875	2.656	O	QQ-N-290, CLASS 2		
				16	1.812	2.000	2.781	P	CAD PLATE (QQ-P-416) OVER		
								T	NICKEL (QQ-N-290)		
								W	14-2 LEACHED IRIDITE MIL-C-5541		
								Z	SPECIAL PER P.O.		

TABLE I				TABLE II				TABLE III			
DASH NO	SHELL SIZE	A THREAD CLASS 2A	B DIA ±.031	CLAMP SIZE	CABLE RANGE MIN	CABLE RANGE MAX	ITEM 7 SIZE LG	SYM	FINISH	DESCRIPTION	APPROVED
9	12	1/2-20 UNF	.593	1	.062	.125	.750	A	CADMIUM PLATE/BRIGHT DIP	REV PER EO 00029	DATE 12-7-67
12	15	1/4-20 UNF	.812	2	.125	.250	.937	B	QQ-P-416, TYPE I, CLASS 3	REV PER EO 00029	2-26-68
15	18	1/4-20 UNF	.937	3	.250	.375	1.031	C	CAD PLATE/OLIVE DRAB	REV PER DCN 00301	6-10-68
18	18	1-28 UN	1.156	4	.312	.500	1.125	D	QQ-P-416, TYPE II, CLASS 3	REV PER DCN 00301	11-7-68
				5	.437	.625	1.187	E	IRIDITE/GOLD, MIL-C-5541, TYPE I, GRADE C, CLASS 3	REV PER DCN 01400	12-11-68
				6	.562	.750	1.312	F	HARD CHROME	REVISED PER DCN 03485	11-27-68
				7	.687	.875	1.437	G	QQ-C-320, TYPE II, CLASS 2A	REVISED PER DCN 07112	3-31-68
				8	.812	1.000	1.562	H	CAD PLATE/BRIGHT DIP	REVISED PER DCN 07609	10-18-68
				9	.937	1.125	1.687	I	ELECTROLESS NICKEL		
				10	1.062	1.250	1.812	J	ELECTROLESS NICKEL		
				11	1.187	1.375	2.187	K	MIL-C-26074A, CLASS 1		
				12	1.312	1.500	2.281	L	CAD PLATE/OLIVE DRAB		
				13	1.437	1.625	2.406	M	NICKEL (QQ-N-290)		
				14	1.562	1.750	2.531	N	NICKEL PLATE		
				15	1.687	1.875	2.656	O	QQ-N-290, CLASS 2		
				16	1.812	2.000	2.781	P	CAD PLATE (QQ-P-416) OVER		
								T	NICKEL (QQ-N-290)		
								W	14-2 LEACHED IRIDITE MIL-C-5541		
								Z	SPECIAL PER P.O.		

TABLE I				TABLE II				TABLE III			
DASH NO	SHELL SIZE	A THREAD CLASS 2A	B DIA ±.031	CLAMP SIZE	CABLE RANGE MIN	CABLE RANGE MAX	ITEM 7 SIZE LG	SYM	FINISH	DESCRIPTION	APPROVED
9	12	1/2-20 UNF	.593	1	.062	.125	.750	A	CADMIUM PLATE/BRIGHT DIP	REV PER EO 00029	DATE 12-7-67
12	15	1/4-20 UNF	.812	2	.125	.250	.937	B	QQ-P-416, TYPE I, CLASS 3	REV PER EO 00029	2-26-68
15	18	1/4-20 UNF	.937	3	.250	.375	1.031	C	CAD PLATE/OLIVE DRAB	REV PER DCN 00301	6-10-68
18	18	1-28 UN	1.156	4	.312	.500	1.125	D	QQ-P-416, TYPE II, CLASS 3	REV PER DCN 00301	11-7-68
				5	.437	.625	1.187	E	IRIDITE/GOLD, MIL-C-5541, TYPE I, GRADE C, CLASS 3	REV PER DCN 01400	12-11-68
				6	.562	.750	1.312	F	HARD CHROME	REVISED PER DCN 03485	11-27-68
				7	.687	.875	1.437	G	QQ-C-320, TYPE II, CLASS 2A	REVISED PER DCN 07112	3-31-68
				8	.812	1.000	1.562	H	CAD PLATE/BRIGHT DIP	REVISED PER DCN 07609	10-18-68
				9	.937	1.125	1.687	I	ELECTROLESS NICKEL		
				10	1.062	1.250	1.812	J	ELECTROLESS NICKEL		
				11	1.187	1.375	2.187	K	MIL-C-26074A, CLASS 1		
				12	1.312	1.500	2.281	L	CAD PLATE/OLIVE DRAB		
				13	1.437	1.625	2.406	M	NICKEL (QQ-N-290)		
				14	1.562	1.750	2.531	N	NICKEL PLATE		
				15	1.687	1.875	2.656	O	QQ-N-290, CLASS 2		
				16	1.812	2.000	2.781	P	CAD PLATE (QQ-P-416) OVER		
								T	NICKEL (QQ-N-290)		
								W	14-2 LEACHED IRIDITE MIL-C-5541		
								Z	SPECIAL PER P.O.		


TABLE I				TABLE II				TABLE III			
DASH NO	SHELL SIZE	A THREAD CLASS 2A	B DIA ±.031	CLAMP SIZE	CABLE RANGE MIN	CABLE RANGE MAX	ITEM 7 SIZE LG	SYM	FINISH	DESCRIPTION	APPROVED
9	12	1/2-20 UNF	.593	1	.062	.125	.750	A	CADMIUM PLATE/BRIGHT DIP	REV PER EO 00029	DATE 12-7-67
12	15	1/4-20 UNF	.812	2	.125	.250	.937	B	QQ-P-416, TYPE I, CLASS 3	REV PER EO 00029	2-26-68
15	18	1/4-20 UNF	.937	3	.250	.375	1.031	C	CAD PLATE/OLIVE DRAB	REV PER DCN 00301	6-10-68
18	18	1-28 UN	1.156	4	.312	.500	1.125	D	QQ-P-416, TYPE II, CLASS 3	REV PER DCN 00301	11-7-68
				5	.437	.625	1.187	E	IRIDITE/GOLD, MIL-C-5541, TYPE I, GRADE C, CLASS 3	REV PER DCN 01400	12-11-68
				6	.562	.750	1.312	F	HARD CHROME	REVISED PER DCN 03485	11-27-68
				7	.687	.875	1.437	G	QQ-C-320, TYPE II, CLASS 2A	REVISED PER DCN 07112	3-31-68
				8	.812	1.000	1.562	H	CAD PLATE/BRIGHT DIP	REVISED PER DCN 07609	10-18-68
				9	.937	1.125	1.687	I	ELECTROLESS NICKEL		
				10	1.062	1.250	1.812	J	ELECTROLESS NICKEL		
				11	1.187	1.375	2.187	K	MIL-C-26074A, CLASS 1		
				12	1.312	1.500	2.281	L	CAD PLATE/OLIVE DRAB		
				13	1.437	1.625	2.406	M	NICKEL (QQ-N-290)		
				14	1.562	1.750	2.531	N	NICKEL PLATE		
				15	1.687	1.875	2.656	O	QQ-N-290, CLASS 2		
				16	1.812	2.000	2.781	P	CAD PLATE (QQ-P-416) OVER		
								T	NICKEL (QQ-N-290)		
								W	14-2 LEACHED IRIDITE MIL-C-5541		
								Z	SPECIAL PER P.O.		

TABLE I				TABLE II				TABLE III			
DASH NO	SHELL SIZE	A THREAD CLASS 2A	B DIA ±.031	CLAMP SIZE	CABLE RANGE MIN	CABLE RANGE MAX	ITEM 7 SIZE LG	SYM	FINISH	DESCRIPTION	APPROVED
9	12	1/2-20 UNF	.593	1	.062	.125	.750	A	CADMIUM PLATE/BRIGHT DIP	REV PER EO 00029	DATE 12-7-67
12	15	1/4-20 UNF	.812	2	.125	.250	.937	B	QQ-P-416, TYPE I, CLASS 3	REV PER EO 00029	2-26-68
15	18	1/4-20 UNF	.937	3	.250	.375	1.031	C	CAD PLATE/OLIVE DRAB	REV PER DCN 00301	6-10-68
18	18	1-28 UN	1.156	4	.312	.500	1.125	D	QQ-P-416, TYPE II, CLASS 3	REV PER DCN 00301	11-7-68
				5	.437	.625	1.187	E	IRIDITE/GOLD, MIL-C-5541, TYPE I, GRADE C, CLASS 3	REV PER DCN 01400	12-11-68
				6	.562	.750	1.312	F	HARD CHROME	REVISED PER DCN 03485	11-27-68
				7	.687	.875	1.437	G	QQ-C-320, TYPE II, CLASS 2A	REVISED PER DCN 07112	3-31-68
				8	.812	1.000	1.562	H	CAD PLATE/BRIGHT DIP	REVISED PER DCN 07609	10-18-68
				9	.937	1.125	1.687	I	ELECTROLESS NICKEL		
				10	1.062	1.250	1.812	J	ELECTROLESS NICKEL		
				11	1.187	1.375	2.187	K	MIL-C-26074A, CLASS 1		
				12	1.312	1.500	2.281	L	CAD PLATE/OLIVE DRAB		
				13	1.437	1.625	2.406	M	NICKEL (QQ-N-290)		
				14	1.562	1.750	2.531	N	NICKEL PLATE		
				15	1.687	1.875	2.656	O	QQ-N-290, CLASS 2		
				16	1.812	2.000	2.781	P	CAD PLATE (QQ-P-416) OVER		
								T	NICKEL (QQ-N-290)		
								W	14-2 LEACHED IRIDITE MIL-C-5541		
								Z	SPECIAL PER P.O.		

TABLE I				TABLE II				TABLE III			
DASH NO	SHELL SIZE	A THREAD CLASS 2A	B DIA ±.031	CLAMP SIZE	CABLE RANGE MIN	CABLE RANGE MAX	ITEM 7 SIZE LG	SYM	FINISH	DESCRIPTION	APPROVED
9	12	1/2-20 UNF	.593	1	.062	.125	.750	A	CADMIUM PLATE/BRIGHT DIP	REV PER EO 00029	DATE 12-7-67
12	15	1/4-20 UNF	.812	2	.125	.250	.937	B	QQ-P-416, TYPE I, CLASS 3	REV PER EO 00029	2-26-68
15	18	1/4-20 UNF	.937	3	.250	.375	1.031	C	CAD PLATE/OLIVE DRAB	REV PER DCN 00301	6-10-68
18	18	1-28 UN	1.156	4	.312	.500	1.125	D	QQ-P-416, TYPE II, CLASS 3	REV PER DCN 00301	11-7-68
				5	.437	.625	1.187	E	IRIDITE/GOLD, MIL-C-5541, TYPE I, GRADE C, CLASS 3	REV PER DCN 01400	12-11-68
				6	.562	.750	1.312	F	HARD CHROME	REVISED PER DCN 03485	11-27-68
				7	.687	.875	1.437	G	QQ-C-320, TYPE II, CLASS 2A	REVISED PER DCN 07112	3-31-68
				8	.812	1.000	1.562	H	CAD PLATE/BRIGHT DIP	REVISED PER DCN 07609	10-18-68
				9	.937	1.125	1.687	I	ELECTROLESS NICKEL		
				10	1.062	1.250	1.812	J	ELECTROLESS NICKEL		
				11	1.187	1.375	2.187	K	MIL-C-26074A, CLASS 1		
				12	1.312	1.500	2.281	L	CAD PLATE/OLIVE DRAB		
				13	1.437	1.625	2.406	M	NICKEL (QQ-N-290)		
				14	1.562	1.750	2.531	N	NICKEL PLATE		
				15	1.687	1.875	2.656	O	QQ-N-290, CLASS 2		
				16	1.812	2.000	2.781	P	CAD PLATE (QQ-P-416) OVER		
								T	NICKEL (QQ-N-290)		
								W	14-2 LEACHED IRIDITE MIL-C-5541		
								Z	SPECIAL PER P.O.		

7-5-500

43503

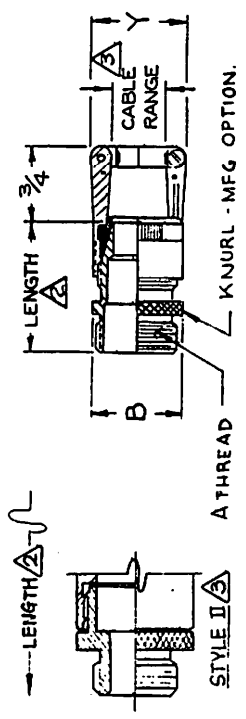

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular MIL Spec Strain Reliefs & Adapters](#) ***category:***

Click to view products by [Glenair](#) ***manufacturer:***

Other Similar products are found below :

[000859-000](#) [001349-000](#) [001415-000](#) [002801-000](#) [003547-000](#) [004115-000](#) [004960-000](#) [006277-000](#) [007001-000](#) [007147-000](#) [009801-000](#)
[0113-023-000](#) [0113-046-000](#) [015423-000](#) [019551-000](#) [025991-000](#) [028649-000](#) [029735-000](#) [031121-000](#) [033165-000](#) [034115-000](#) [035342-](#)
[000](#) [036705-000](#) [039893-000](#) [040761-000](#) [047753-000](#) [051573-000](#) [051715-000](#) [053081-000](#) [055197-000](#) [057141-000](#) [064877-000](#) [067443-](#)
[000](#) [07.312.1855.0](#) [075835-000](#) [075-8543-012](#) [084903-000](#) [084983-000](#) [086628-000](#) [086743-000](#) [087406-000](#) [087463-000](#) [089353-000](#)
[093385-000](#) [095072-000](#) [10-035900-143](#) [10-036233-203](#) [10-037267-018](#) [10-037267-020](#) [10-101393-203](#)