



Applications

- High-speed switching



SOD-323

SOD323

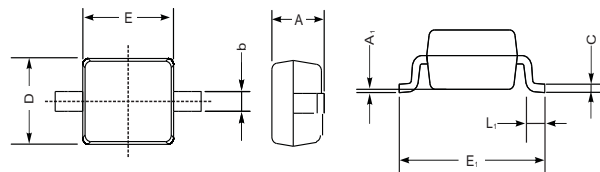

UNIT		A	C	D	E	E ₁	b	L ₁	A ₁
mm	max	1.1	0.15	1.4	1.8	2.75	0.4	0.45	0.2
	min	0.8	0.08	1.2	1.4	2.55	0.25	0.2	—
mil	max	43	5.9	55	70	108	16	16	8
	min	32	3.1	47	63	100	9.8	7.9	—

Absolute Maximum Ratings (T_a = 25 °C)

Parameter	Symbol	Value	Unit	
Repetitive Peak Reverse Voltage	V _{RRM}	100	V	
Reverse Voltage	V _R	100	V	
Continuous Forward Current	I _F	250	mA	
Repetitive Peak Forward Current	I _{FRM}	500	mA	
Non-Repetitive Peak Forward Current	I _{FSM}	4	A	
		t = 1 μs		1
		t = 1 s		0.5
Total Power Dissipation	P _{tot}	200	mW	
Junction Temperature	T _j	150	°C	
Storage Temperature Range	T _{stg}	- 65 to + 150	°C	

BAS316WS

Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Max.	Unit
Forward Voltage at $I_F = 1\text{ mA}$ at $I_F = 10\text{ mA}$ at $I_F = 50\text{ mA}$ at $I_F = 150\text{ mA}$	V_F	0.715 0.855 1 1.25	V
Reverse Current at $V_R = 25\text{ V}$ at $V_R = 75\text{ V}$ at $V_R = 25\text{ V}, T_J = 150\text{ }^\circ\text{C}$ at $V_R = 75\text{ V}, T_J = 150\text{ }^\circ\text{C}$	I_R	30 1 30 50	nA μA μA μA
Diode Capacitance at $V_R = 0\text{ V}, f = 1\text{ MHz}$	C_{tot}	1.5	pF
Reverse Recovery Time at $I_F = I_R = 10\text{ mA}, I_{\text{rr}} = 0.1 \times I_R, R_L = 100\ \Omega$	t_{rr}	4	ns

RATING AND CHARACTERISTIC CURVES (BAS316WS)



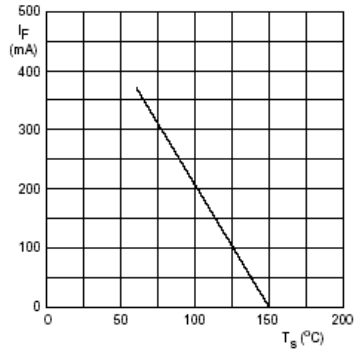


Fig. 1 Maximum permissible continuous forward current as a function of soldering point temperature.



(1) $T_j = 150^\circ\text{C}$; typical values.
 (2) $T_j = 25^\circ\text{C}$; typical values.
 (3) $T_j = 25^\circ\text{C}$; maximum values.

Fig. 2 Forward current as a function of forward voltage.

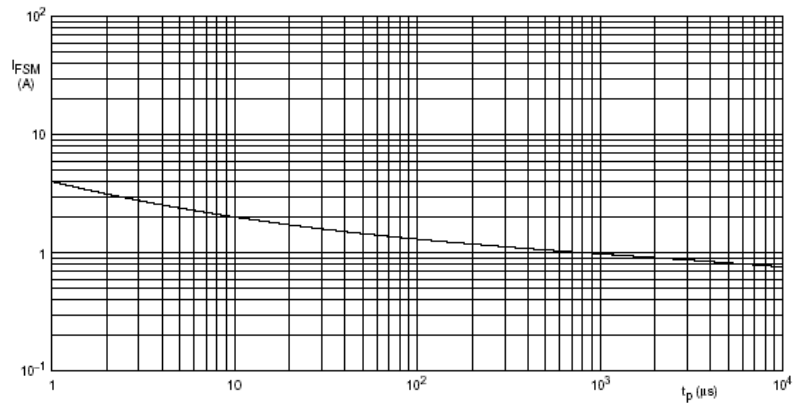

Based on square wave currents.
 $T_j = 25^\circ\text{C}$ prior to surge.

Fig. 3 Maximum permissible non-repetitive peak forward current as a function of pulse duration.





Fig. 4 Reverse current as a function of junction temperature.



$f = 1\text{ MHz}$; $T_j = 25^\circ\text{C}$.

Fig. 5 Diode capacitance as a function of reverse voltage; typical values.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diodes - General Purpose, Power, Switching category:](#)

Click to view products by [GOODWORK manufacturer:](#)

Other Similar products are found below :

[RD0306T-TL-H](#) [RD0506T-TL-H](#) [DCD010-TB-E](#) [DSE010-TR-E](#) [NTE6244](#) [FC903-TR-E](#) [1N4449](#) [1N456A](#) [1N914BTR](#) [RFUH20TB3S](#)
[BAW75-TAP](#) [JAN1N3600](#) [BAV70HDW-7](#) [BAS28 TR](#) [1SS388-TP](#) [SI-A1125](#) [UF3G](#) [SHV-06JNS-Q](#) [2CL75A](#) [MCL4148PF](#) [1SS226,LF\(T](#)
[1SS352\(TPH3,F\)](#) [1SS306\(TE85L.F\)](#) [KDS122-RTK/P](#) [KDS135-RTK/PU](#) [DB107](#) [S-LBAS16HT1G](#) [P1200M](#) [KDS160E-RTL/P](#) [DB106S](#)
[DB207](#) [DB157](#) [DB155](#) [DB206](#) [2CL74](#) [DB105](#) [DB156S](#) [DB206S](#) [DB156](#) [BAV199](#) [1SS181,LF\(T](#) [CRG09A,LXGQ](#) [CRG09A,LQ\(M](#) [DB106](#)
[SDUR1530](#) [S2KTR](#) [S2MTR](#) [GL1M](#) [CD4148WSP](#) [CD4148WTP](#)