



S9014

NPN GENERAL PURPOSE SWITCHING TRANSISTOR

VOLTAGE

45Volts

POWER

300mWatts



FEATURES

- NPN epitaxial silicon, planar design.
- Collector-emitter voltage VCE=45V.
- Collector current IC=0.1A.
- Transition frequency $f_T > 150\text{MHz}$ @ IC=10mAdc, VCE=5Vdc, f=30MHz.
- In compliance with ER RoHS 2002/95/EC directives.

MECHANICAL DATA

Case: SOT-23, Plastic

Terminals: Solderable per MIL-STD-750,
method 2026

Approx. Weight: 0.008gram

Marking: J6



MAXIMUM RATINGS (Ta=25°C unless otherwise noted)

Symbol	Parameter	Value	Unit
V _{CBO}	Collector-Base Voltage	50	V
V _{CEO}	Collector-Emitter Voltage	45	V
V _{EBO}	Emitter-Base Voltage	5	V
I _C	Collector Current	0.1	A
P _D	Total Device Dissipation	0.3	W
R _{θJA}	Thermal Resistance Form Junction to Ambient	625	°C/W
T _J	Junction Temperature	150	°C
T _{STG}	Storage Temperature	-55~+150	°C

S9014

ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)


Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Units
Collector-Base breakdown voltage	V _{(BR)CBO}	I _C =100uA,I _E =0	50			V
Collector-Emitter breakdown voltage	V _{(BR)CEO}	I _C =1mA,I _B =0	45			V
Emitter-Base breakdown voltage	V _{(BR)EBO}	I _E =100uA,I _C =0	5			V
Collector cut-off current	I _{CBO}	V _{CB} =45V,I _C =0		0.1		uA
Collector cut-off current	I _{CEX}	V _{CE} =35V,I _B =0		0.1		uA
Base cut-off current	I _{BEX}			0.1		uA
Emitter cut-off current	I _{EBO}	V _{EB} =3V,I _C =0		0.1		uA
DC current gain*	H _{FE}	I _C =1mA,V _{CE} =5V	200	600		
Collector-Emitter saturation voltage	V _{CE(SAT)}	I _C =20mA,I _B =1mA		0.2		V
		I _C =100mA,I _B =5mA		0.3		V
Base-Emitter Saturation voltage*	V _{BE(SAT)}	I _C =20mA,I _B =1mA		0.85		V
		I _C =100mA,I _B =5mA		0.95		V
Input capacitance	C _{IB}	V _{CB} =5V,I _E =0,f=1MHz		4.0		pF
Output capacitance	C _{OB}	V _{EB} =0.5V,I _C =0,f=1MHz		8.0		pF
Transition frequency	f _T	I _C =10mA,V _{CE} =5V, f=30MHz	150			MHz
Delay time	t _d	V _{CC} =3V,V _{BE} =-0.5V, I _C =10mA,I _B =1mA		35		nS
Rise time	t _r			35		nS
Storage time	t _s	V _{CC} =3V,V _{BE} =-0.5V, I _{B1} =I _{B2} =1mA		200		nS
Fall time	t _f			50		nS

*Pulse Test: Pulse Width<300uS, Duty Cycle<2.0%.


S9014

ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)


Static Characteristic

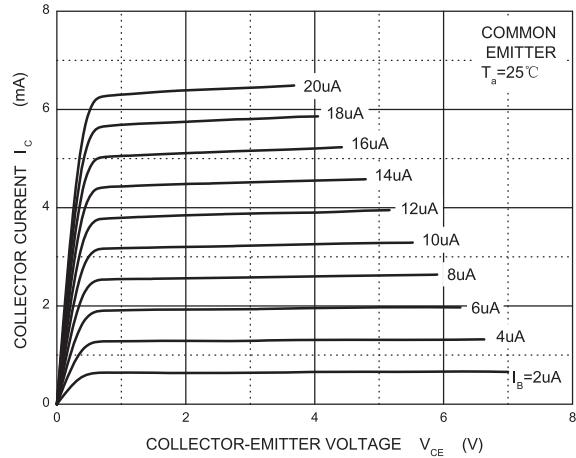


h_{FE} — I_c

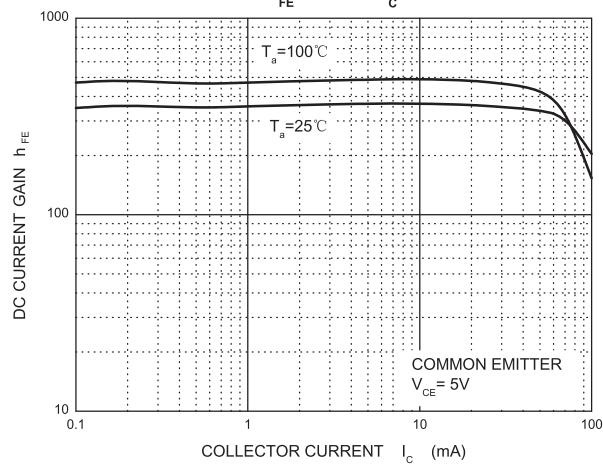





V_{CEsat} — I_c

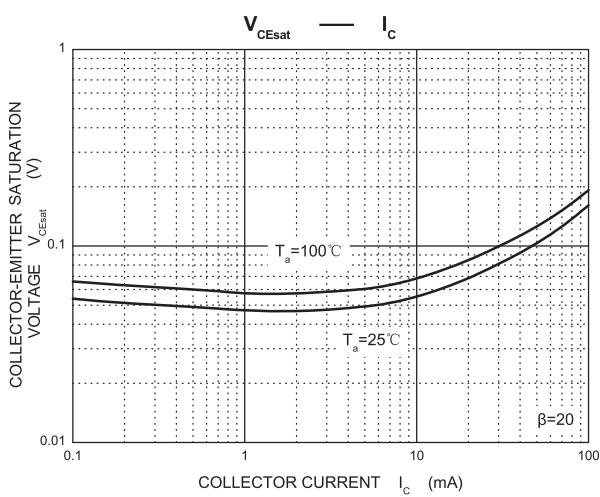


V_{BEsat} — I_c

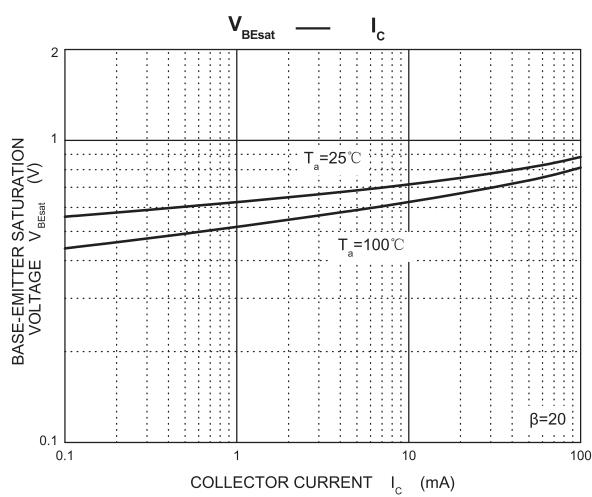

S9014

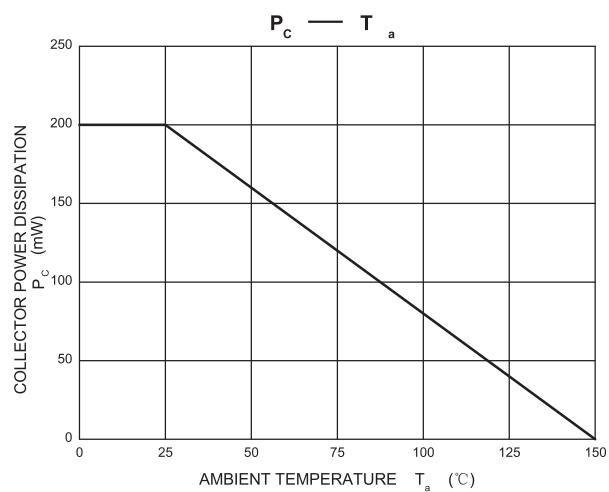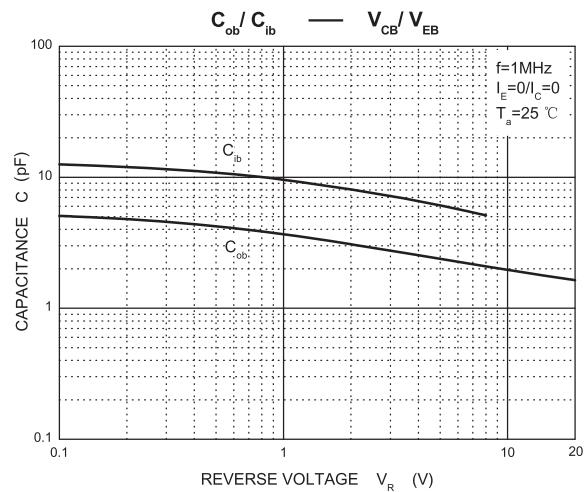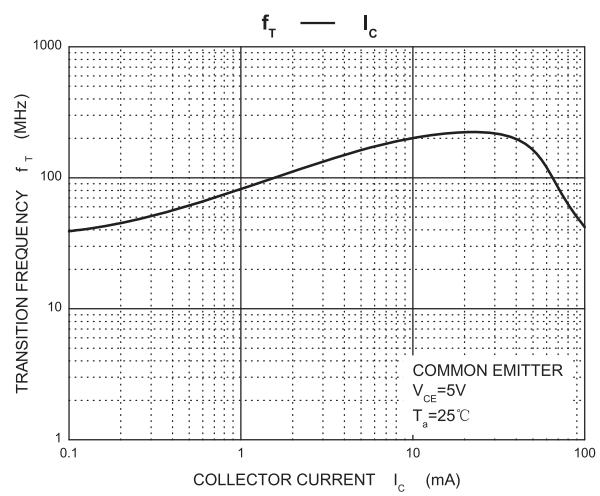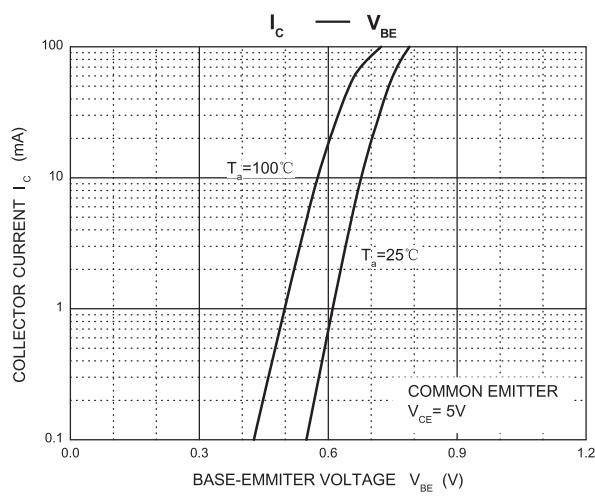


SOT-23 OUTLINE DIMENSIONS

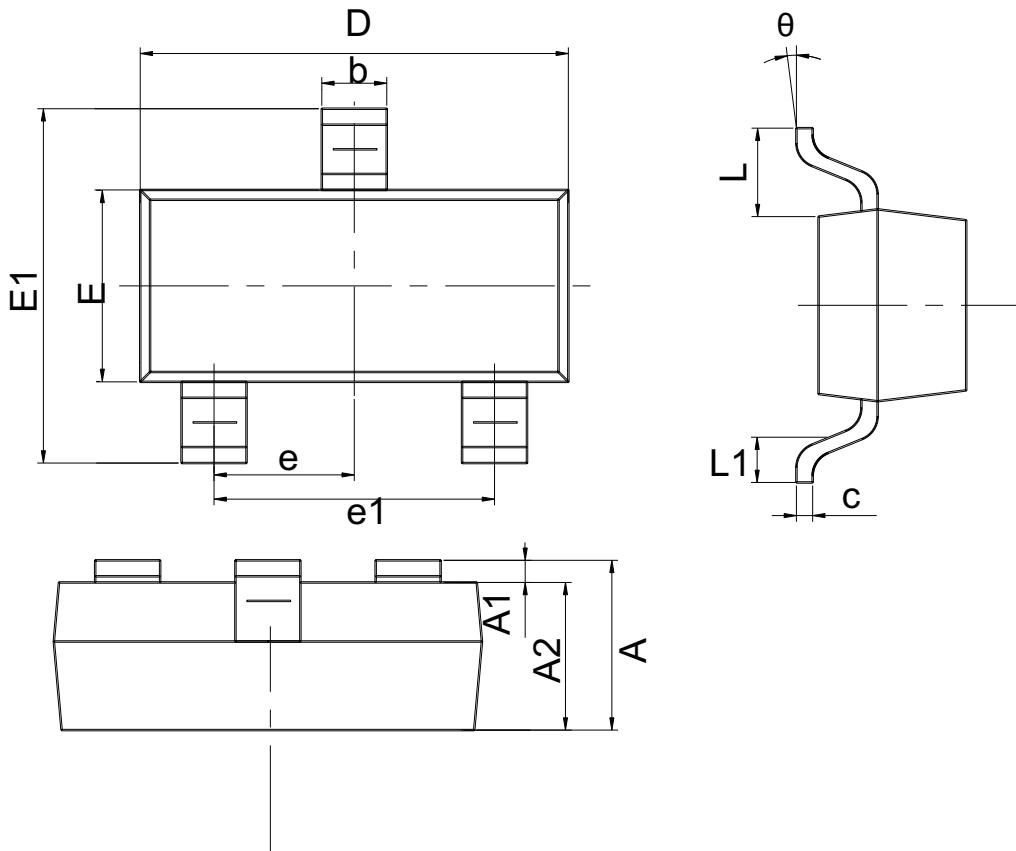

symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950REF.		0.037REF.	
e1	1.800	2.000	0.071	0.079
L	0.550REF		0.022REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

SOT-23 Tape and Reel

SOT-23 Embossed Carrier Tape

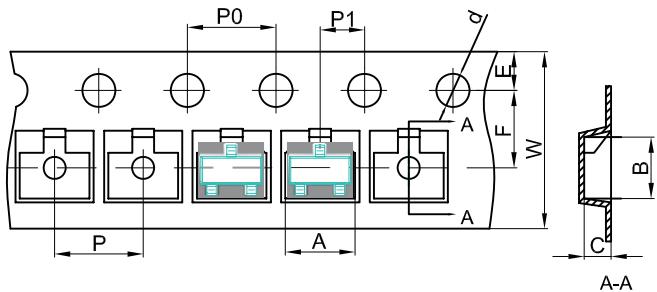


Packaging Description:


SOT-23 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-23	3.15	2.77	1.22	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00
(Tolerance)	+/-0.1	+/-0.1	+/-0.1	+/-0.1	+/-0.1	+/-0.1	+/-0.1	+/-0.1	+/-0.1	+0.3/-0.1

SOT-23 Tape Leader and Trailer

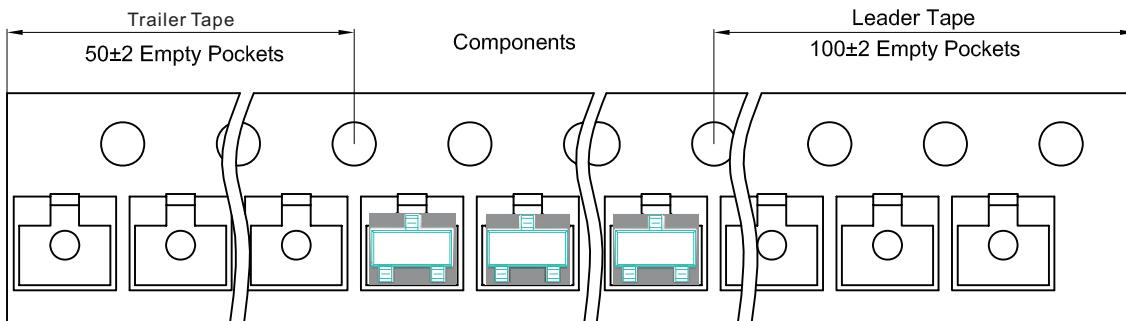

SOT-23 Reel

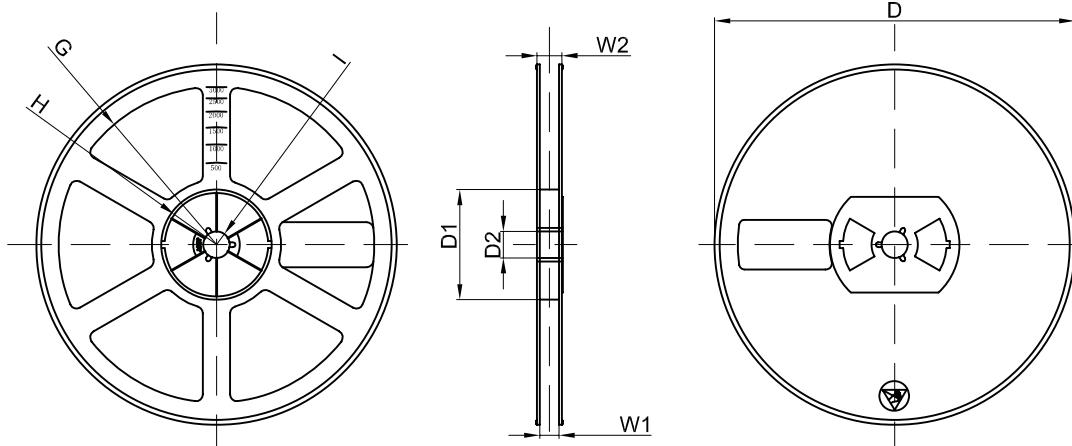


Dimensions are in millimeter

Reel Option	D	D1	D2	G	H	I	W1	W2
7" Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30
Tolerance	+/-2	+/-1	+/-1	+/-1	+/-1	+/-1	+/-1	+/-1

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	45,000 pcs	210x208x203	180,000 pcs	440x440x230	8.45

SOT-23 Pad size

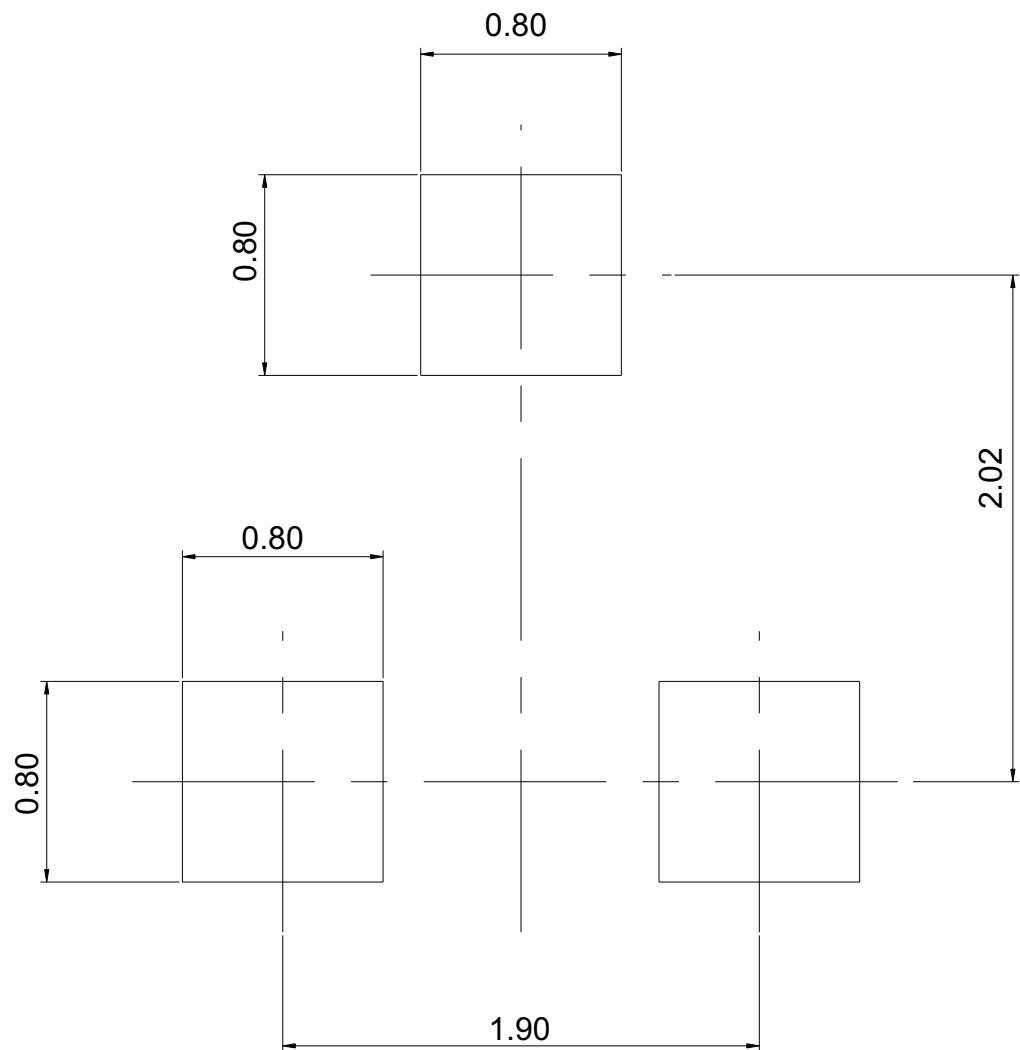

Center distance		1.90
Lead size	Lead width	0.40
	Lead length	0.55
Pad size	Pad width	0.80
	Pad length	0.80

Unit: mm

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - BJT category:

Click to view products by GOODWORK manufacturer:

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NJVMJD148T4G](#) [NTE123AP-10](#) [NTE153MCP](#) [NTE16](#)
[NTE195A](#) [NTE92](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SC2712S-GR,LF](#) [SP000011176](#) [2N2907A](#) [2N3904-](#)
[NS](#) [2N5769](#) [2SC2412KT146S](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [MJE340](#) [Jantx2N5416](#) [US6T6TR](#) [NJL0281DG](#) [732314D](#) [CPH3121-TL-E](#)
[CPH6021-TL-H](#) [873787E](#) [IMZ2AT108](#) [MMST8098T146](#) [UMX21NTR](#) [MCH6102-TL-E](#) [NJL0302DG](#) [30A02MH-TL-E](#) [NTE13](#) [NTE26](#)
[NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [STX83003-AP](#) [JANTX2N2920L](#) [JANSR2N2222AUB](#) [CMLT3946EG TR](#) [2SA1371D-AE](#)