

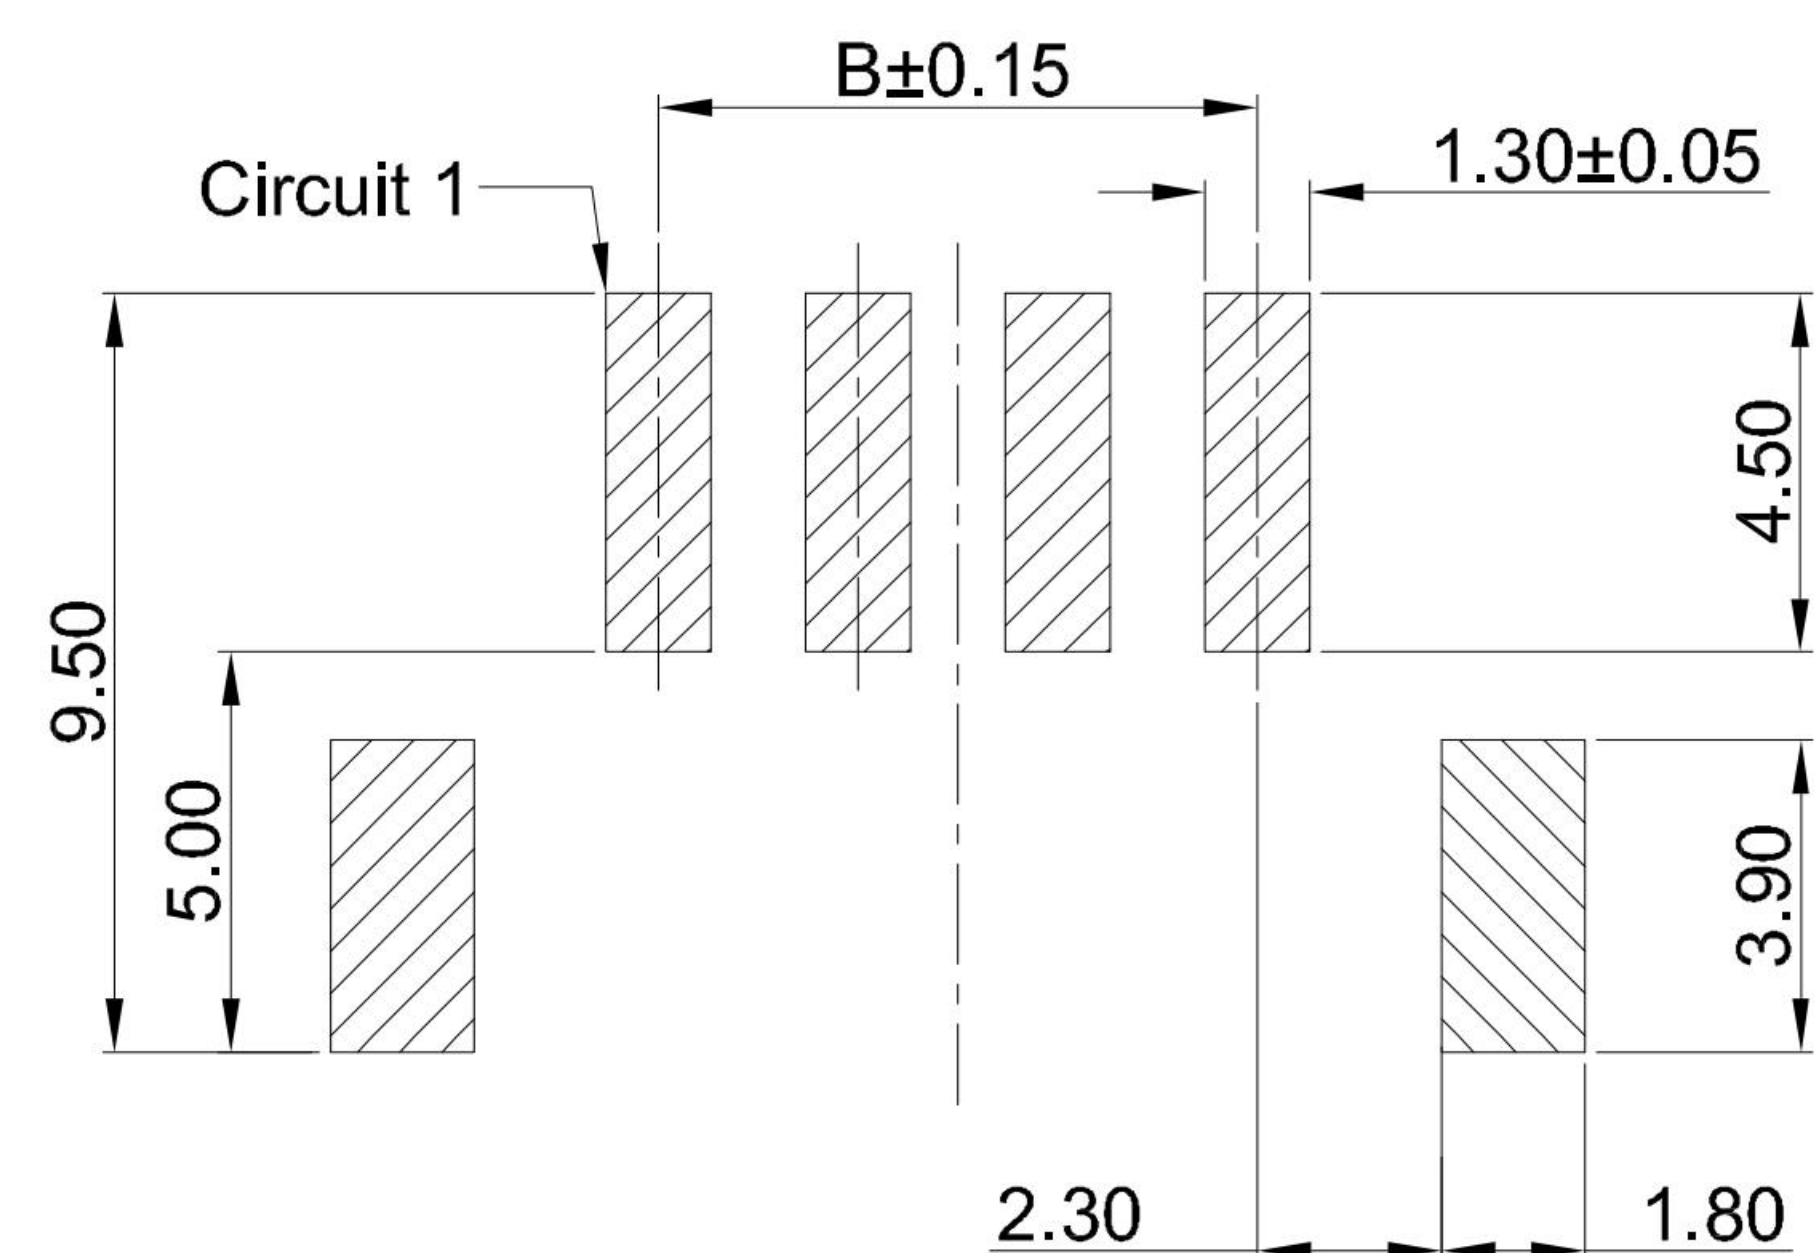
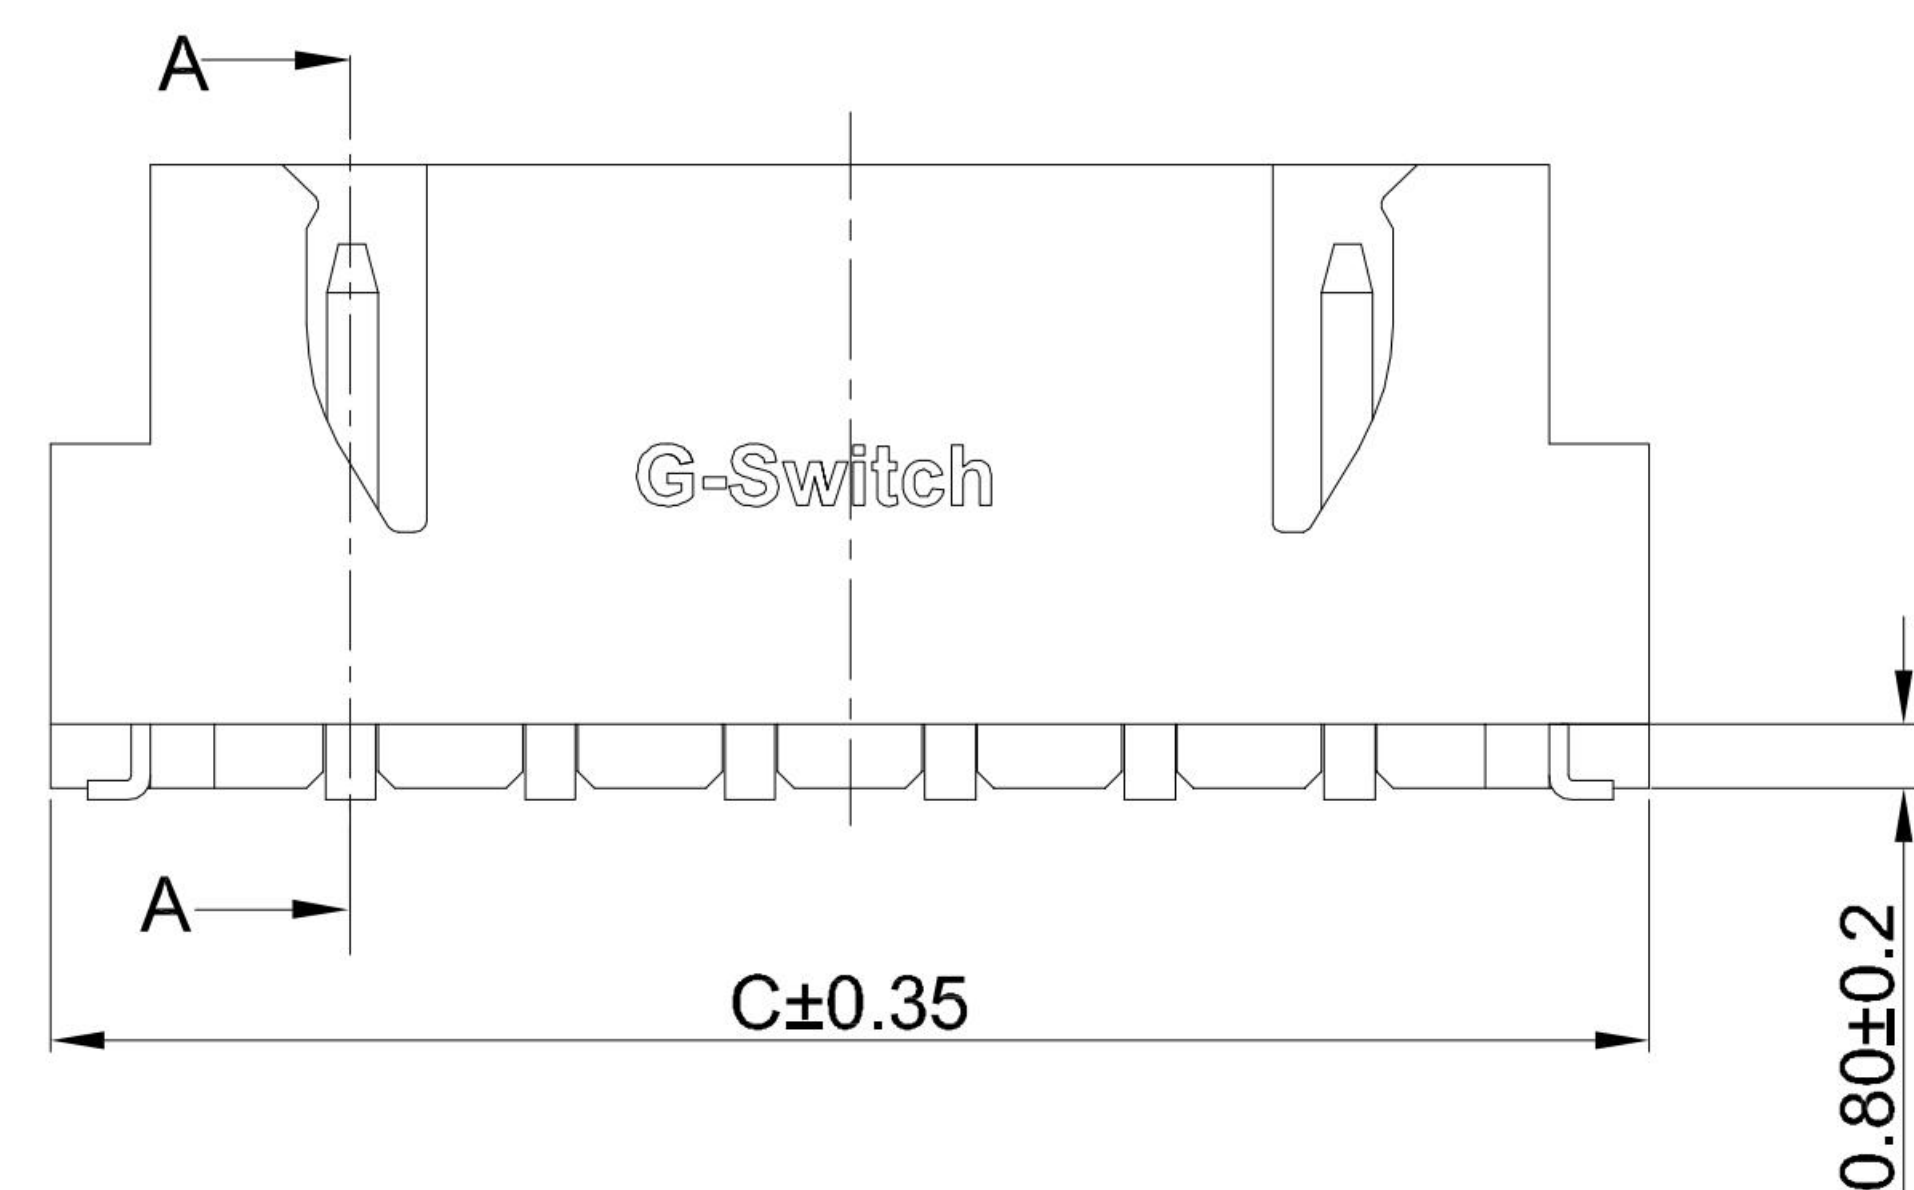


1
2
3
4
5


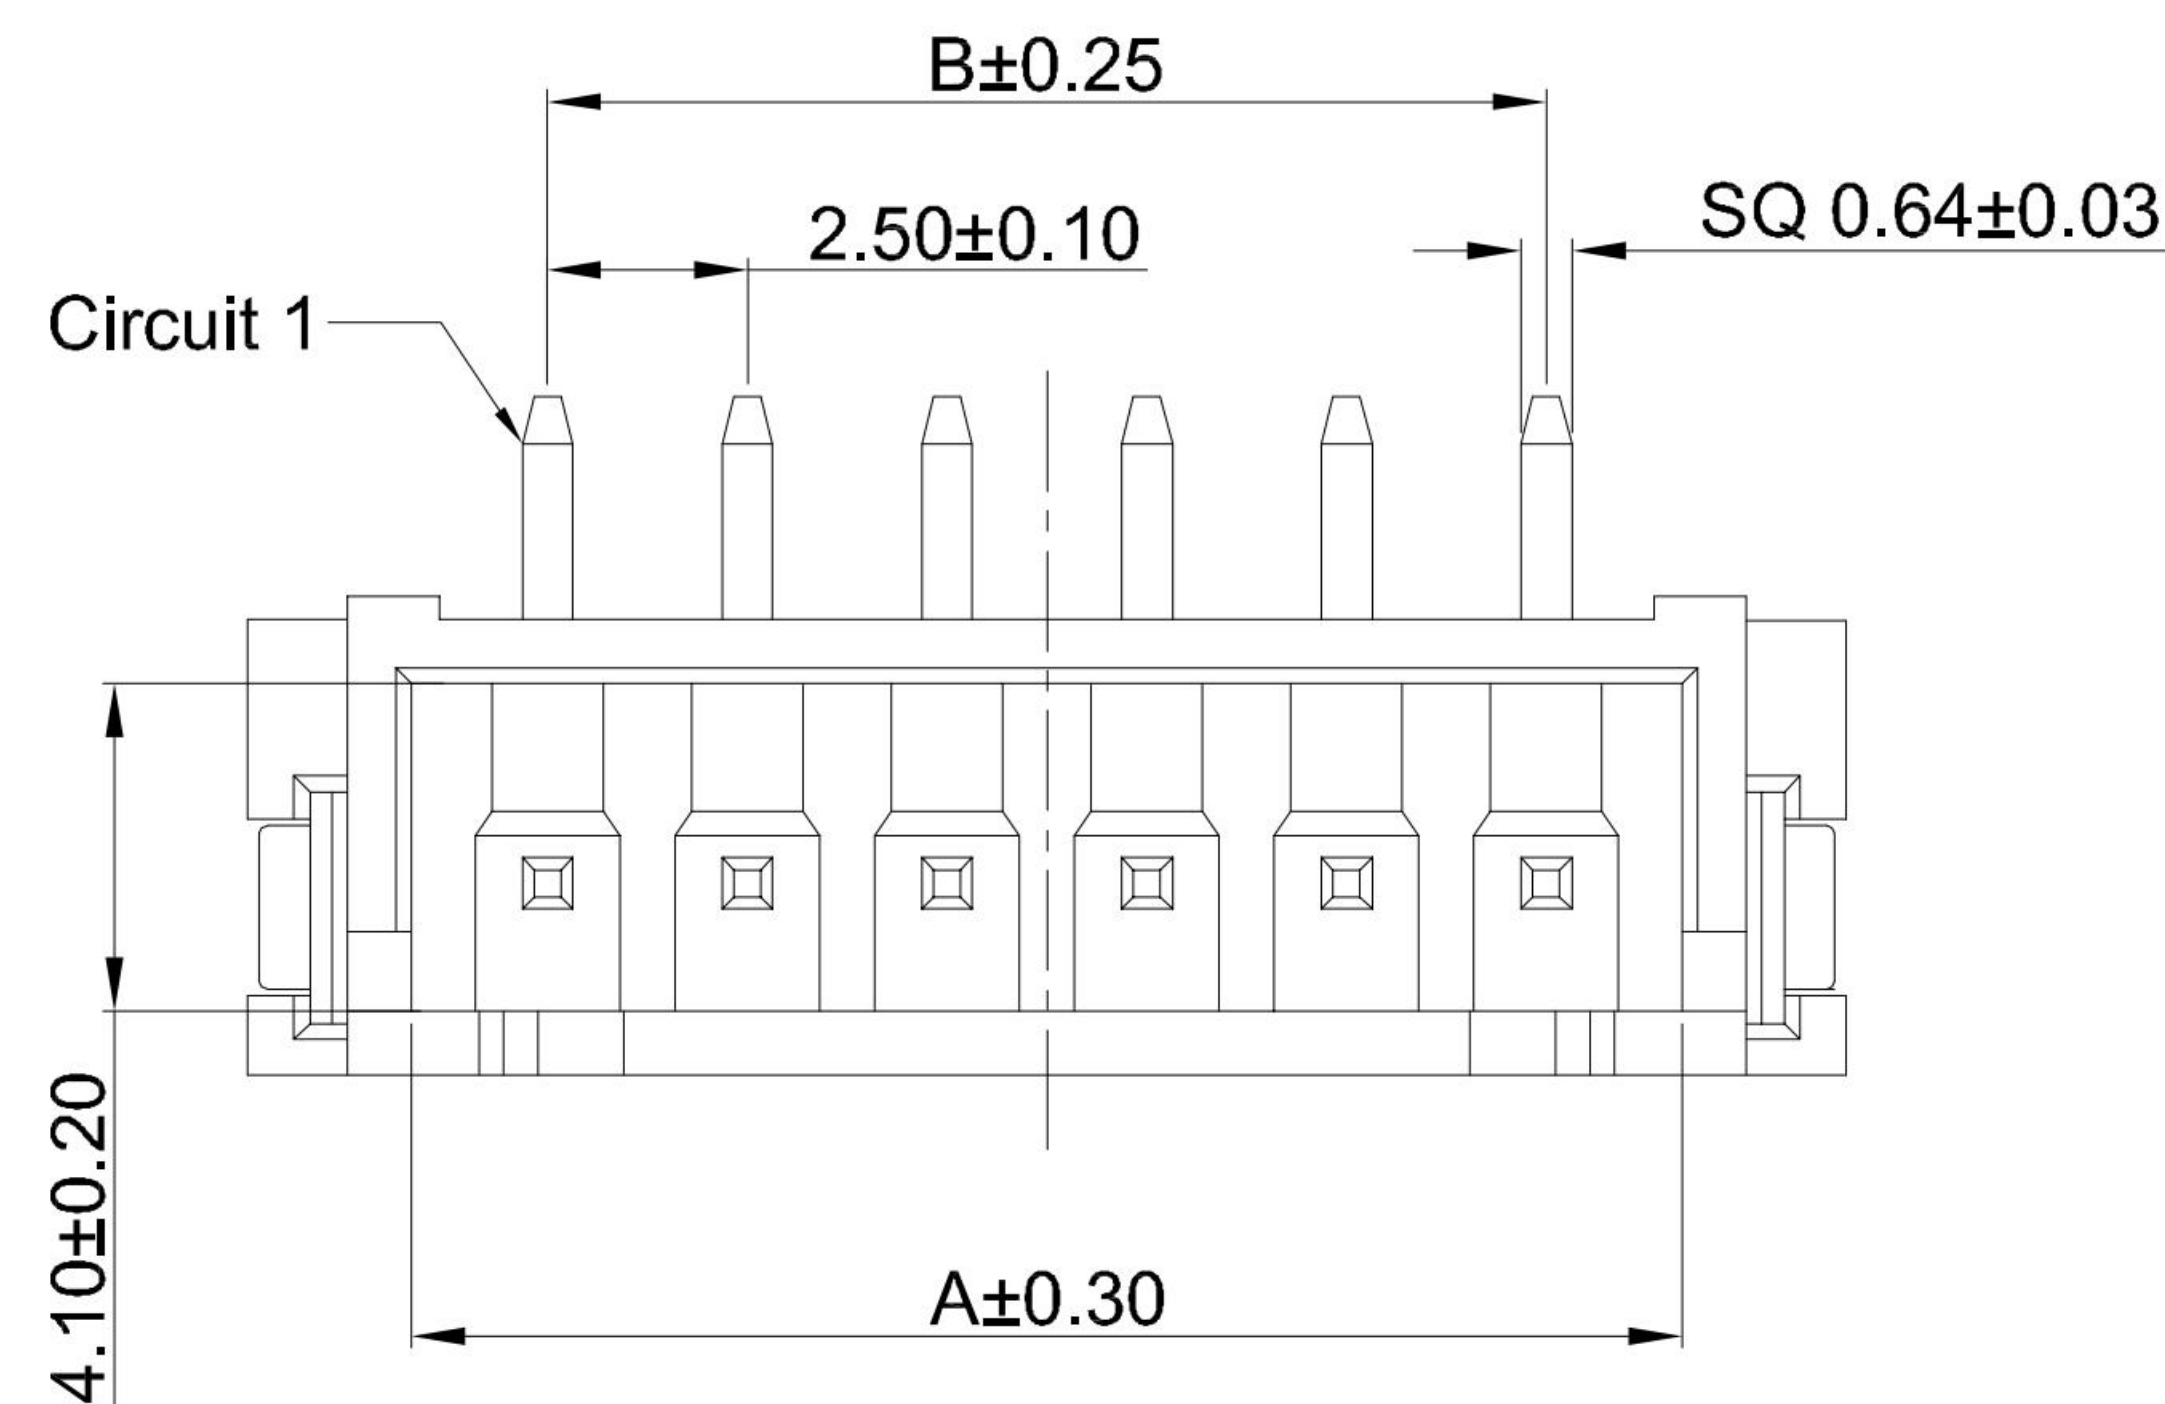


RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.05

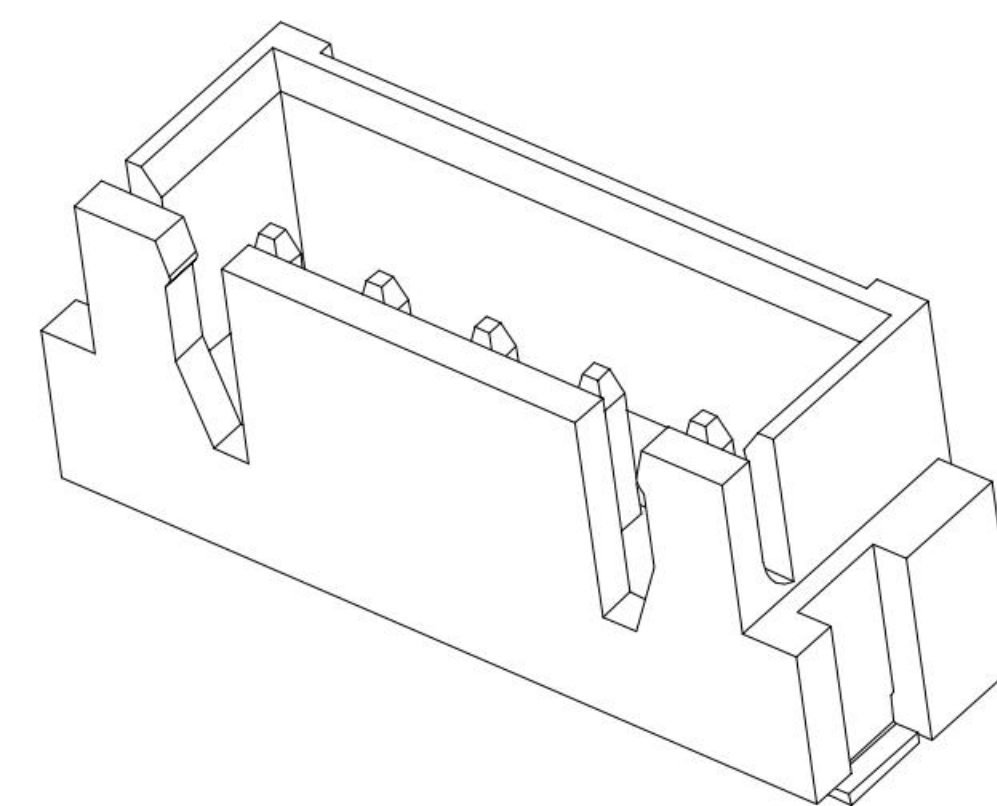


G-Switch Specification:

- 1.Current rated: 3.0A AC/DC
- 2.Voltage rating: 250V AC/DC
- 3.Withstanding voltage: 1000V AC
- 4.Contact resistance: 10m Ω max.
- 5.Insulation resistance: 1000M Ω min
- 6.Durability cycle: 30Cycles
- 7.Removal force: 1.50kgf/Pin min
- 8.Operating temperature range: -25°C ~ +85°C

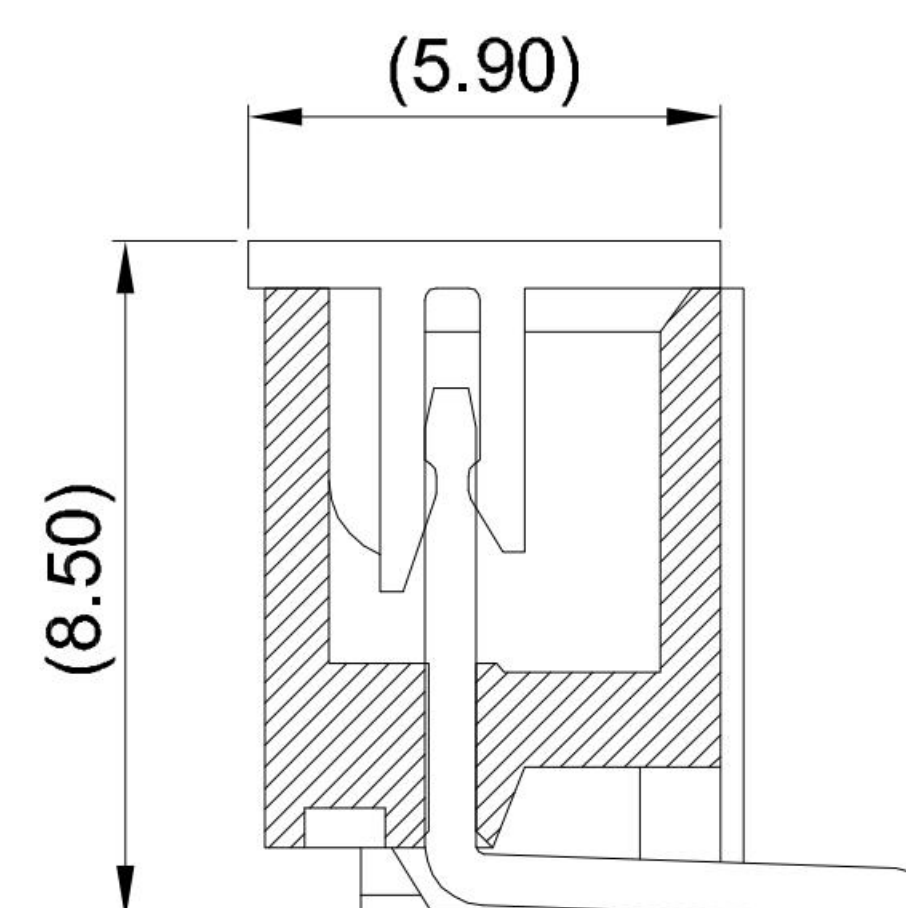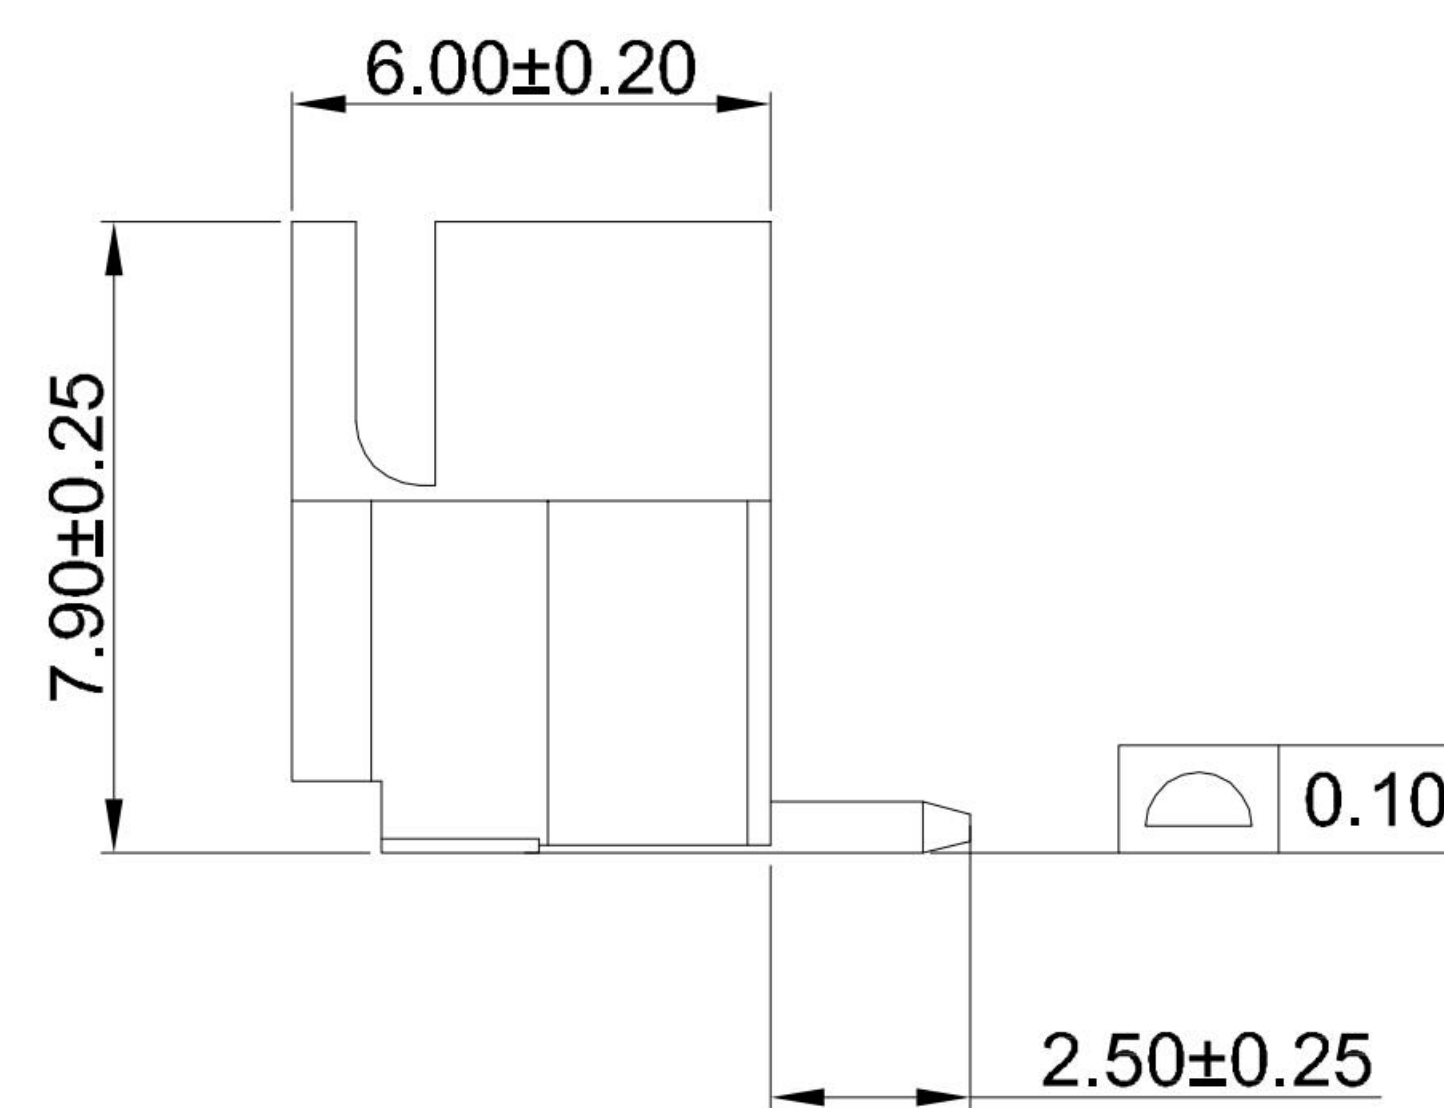

SECTION:A-A

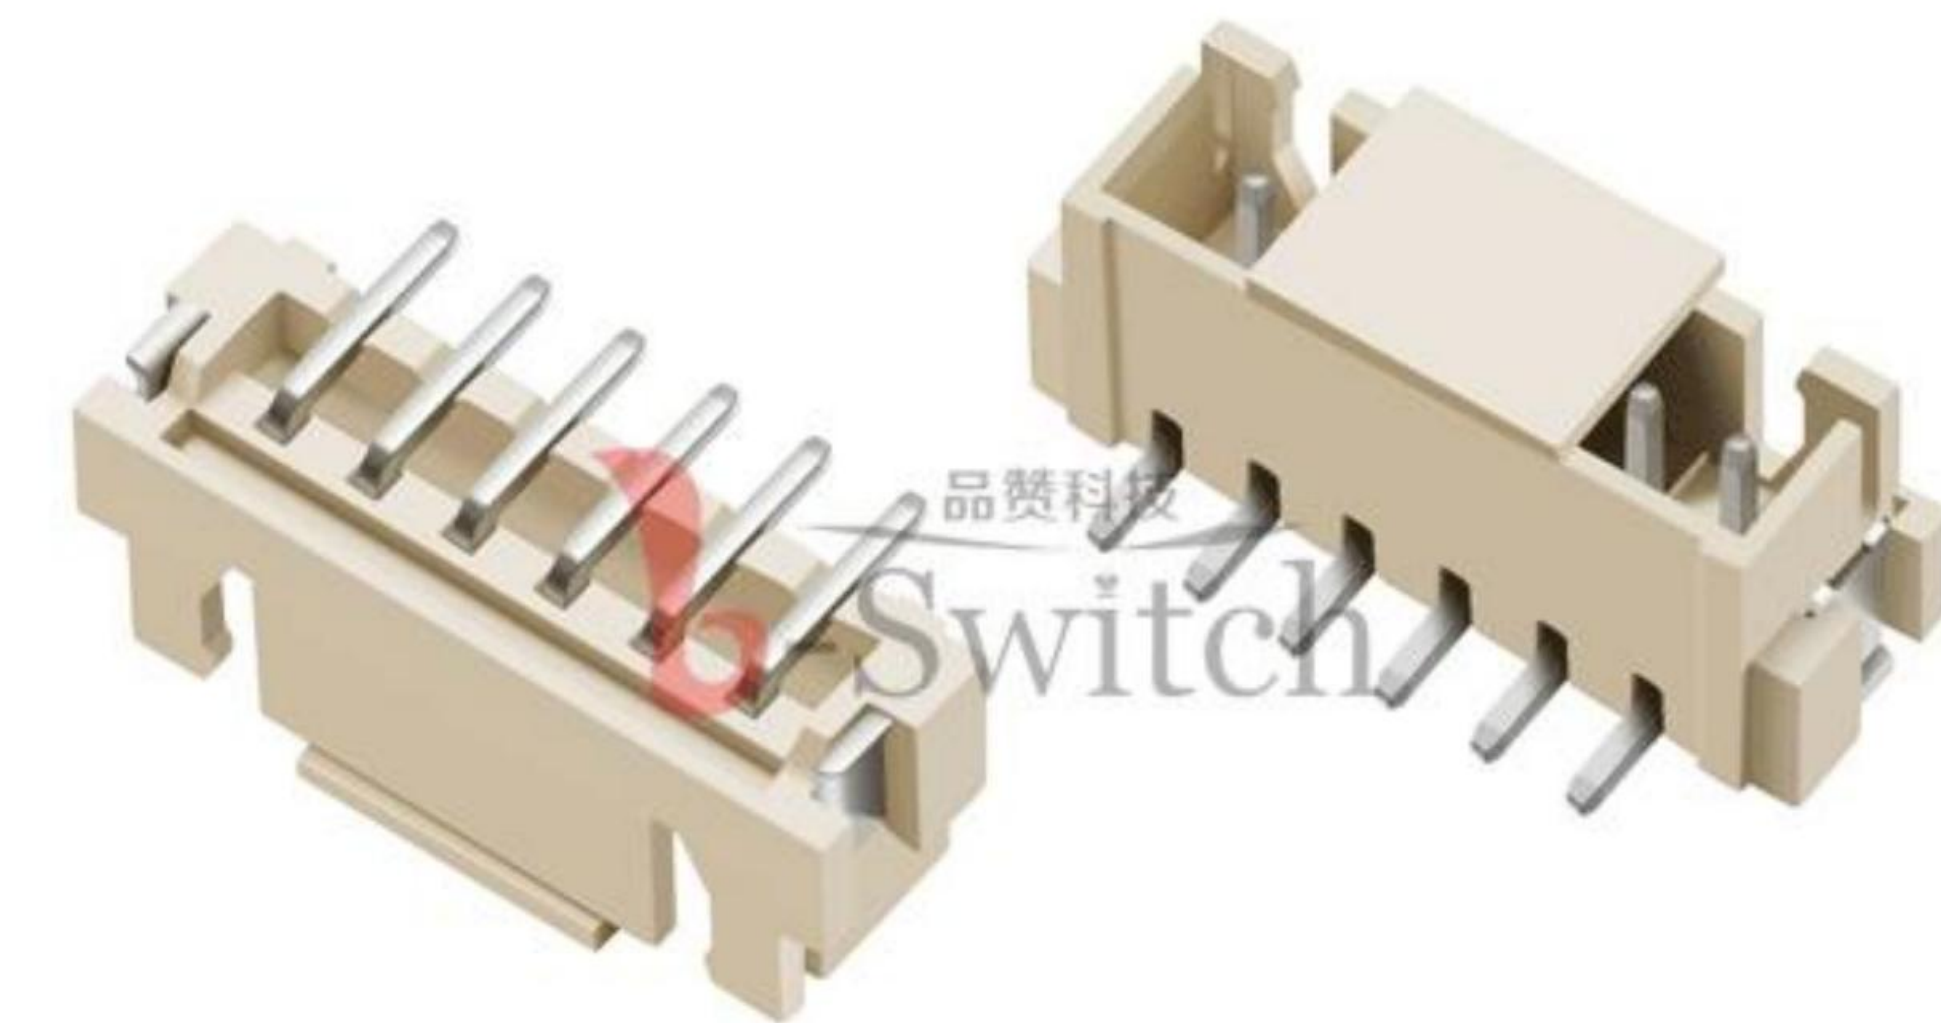

GT-A2501 W V S-1 XX X XX 01

G-Switch

Series No

Connector
W-Wafer

Angle
V-180°

Termipoint
S-SMT

Terminal Plating
BT-Bright Tin

Housing Colour
S-Nature

Pin Q' PY
02~16

Row NO
1-Single row

Ordering Information:

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
02	5.90	---	10.00	10	25.90	22.50	30.00
03	8.40	5.00	12.50	11	28.40	25.00	32.50
04	10.90	7.50	15.00	12	30.90	27.50	35.00
05	13.40	10.00	17.50	13	33.40	30.00	37.50
06	15.90	12.50	20.00	14	35.90	32.50	40.00
07	18.40	15.00	22.50	15	38.40	35.00	42.50
08	20.90	17.50	25.00	16	40.90	37.50	45.00
09	23.40	20.00	27.50	---	---	---	---

4	SOLDER TABS	PHOSPHOR BRONZE	BRIGHT Tin
3	PIN MATERIAL	BRASS	BRIGHT Tin
2	CAP	LCP,94V-0	NATURE
1	HOUSING	LCP,94V-0	NATURE
NO.	PART NAME	MATERIAL	REMARK

SCALE: 1:1
UNIT: mm

SIZE: A4

Unless otherwise
General Tolerance:

X ± 0.40
X.x ± 0.30
X.xx ± 0.20
X° $\pm 5^\circ$
X.x° $\pm 3^\circ$

Title: Wafer Pitch 2.50mm 180° XH
SMT Type Connector

Molde Code: GT-A2501WVS-1XXXXX01

DRAWN	CHECKED	APPROVED	DATE
Hu	Hu	Chen	2022.12.28

品赞科技®
b-Switch
www.dg-switch.com

REV: A0 SHEET: 1/1

1
2
3
4
5

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) ***category:***

Click to view products by [G-Switch](#) ***manufacturer:***

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)
[65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[803-43-024-10-001000](#)