

HR644801E

Electrical Specification @25°C

Operating Temperature Range: -40°C ~ +85°C

Isolation: 1500Vrms 0.5mA 60sec (P1~24 to P25~48)

OCL: 350uH Minimum @100KHz 100mV with 8mADC

Insertion Loss: -1.0dB Maximum @1MHz ~ 100MHz

Return Loss: -18dB Minimum @1MHz ~ 30MHz / -13.5dB Minimum @30MHz ~ 60MHz


-12dB Minimum @60MHz ~ 80MHz / -10dB Minimum @80MHz ~ 100MHz

Different to Common Mode Rejection: -45dB Minimum @30MHz / -40dB Minimum @60MHz





-35dB Minimum @100MHz

Crosstalk: -35dB Minimum @30MHz / -32dB Minimum @60MHz / -28dB Minimum @100MHz

Schematics

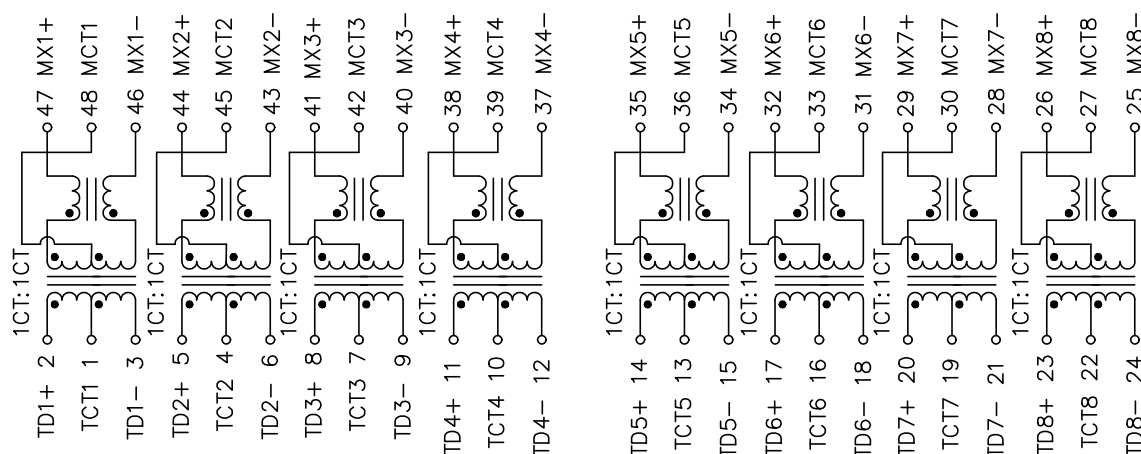

Mechanical Dimensions

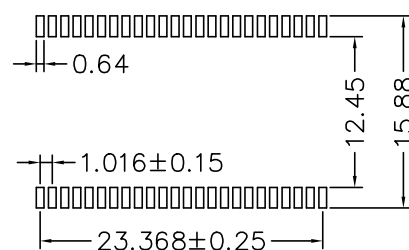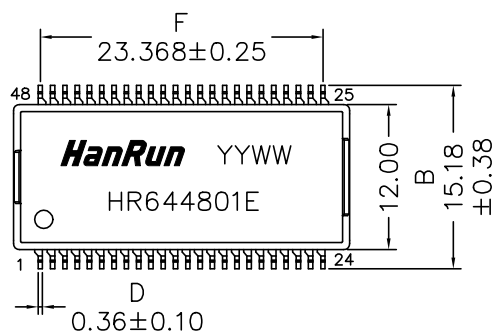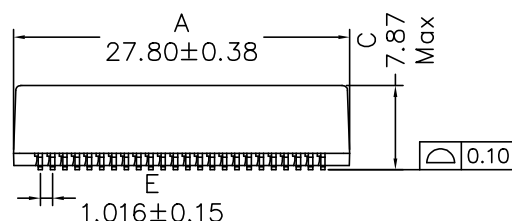

(SUGGESTED PAD LAYOUT)

Dimensions in mm

Unless otherwise specified, Tolerance: .xx ±0.25

REV.: 00

1 of 1

Address: No.16, Industrial Road Central, Industrial Zone, Xiaolan Town,
Zhongshan City, Guangdong Province, China

Tel: (0760)86103511 86103508 Fax: (0760)86103686 Post code: 528416

E-Mail: sales@hanrun.com http://www.hanrun.com

Specifications subject to change without notice. Refer to the approval sheet for lastly edition.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [HanRun](#) manufacturer:

Other Similar products are found below :

[HR911105A](#) [HY911103A](#) [HR610660](#) [HR903129C](#) [HR903129AE](#) [HR913124A](#) [HY602402E](#) [HR911297CE](#) [HR915200C](#) [HR911196AE](#)
[HR641640E](#) [HR915210C](#) [HR915340AE](#) [HR682432E](#) [HY602403](#) [HR681616](#) [HR644801E](#) [HR913325A](#) [HR911025C](#) [HR600786E](#)
[HR913129A](#) [HR931474CE](#) [HR851120A](#) [HY911261C](#) [HR862635H](#) [HR923550AE](#) [HR916231HE](#) [HR600956E](#) [HR601233E](#) [HR961142AE](#)
[HR903125C](#) [HR913128CE](#) [HR913129H](#) [HR641642E](#) [HY911205CE](#) [HR923128HE](#) [HR642482E](#) [HR981190C](#) [HR913180AE](#) [HR916100H](#)
[HY604009E](#) [HY971161C](#) [HR916103H](#) [HR871210DE](#) [HR916130H](#) [HR913129AE](#) [HR915320AE](#) [HR051154](#) [HR641680](#) [HR641643E](#)