
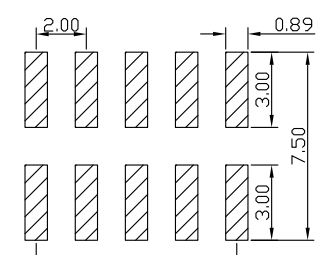




SPECIFICATIONS

Current Rating: 1.5 Amps
 Insulation Resistance: 1000M Ω , Min
 Contact Resistance: 20m Ω , Max
 Withstanding Voltage: AC 500V
 Operation Temperature: -40° to +105°
 Contact Material: Brass
 Standard: PA6T
 Insulator Material: Polyester (UL 94V-0)
 Contact Plating: Gold Flash
 Max. Processing Temp: 240° C for 30-60 seconds
 (260° C for 5 seconds)

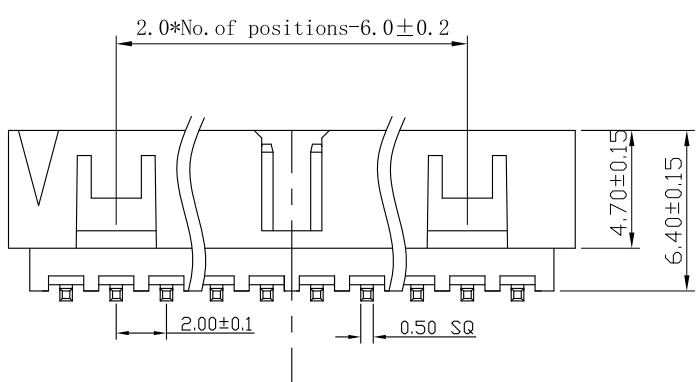

RECOMMEND P. C. B LAYOUT
 PCB TOLERANCE: ±0.05 (TOP VIEW)

io. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B
6	4.00	8.60	24	22.00	26.60	42	40.00	44.60	60	58.00	62.60
8	6.00	10.60	26	24.00	28.60	44	42.00	46.60	62	60.00	64.60
10	8.00	12.60	28	26.00	30.60	46	44.00	48.60	64	62.00	66.60
12	10.00	14.60	30	28.00	32.60	48	46.00	50.60	66	64.00	68.60
14	12.00	16.60	32	30.00	34.60	50	48.00	52.60	68	66.00	70.6
16	14.00	18.60	34	32.00	36.60	52	50.00	54.60	70	68.00	72.60
18	16.00	20.60	36	34.00	38.60	54	52.00	56.60			
20	18.00	22.60	38	36.00	40.60	56	54.00	58.60			
22	20.00	24.60	40	38.00	42.60	58	56.00	60.60			



深圳市韩下电子有限公司

UNLESS OTHERWISE SPECIFIED TOLERANCE				DRAWN NAME: HX JN2.0-2x5P TP H6.4				
X	: ±0.3	X°	: ±5°	SIZE	A4	SCALE	N:1	PROUCT NO.
X.X	: ±0.2	X.X°	: ±1°	REV	A	UNIT	mm	PROJECT
X.XX	: ±0.1	X.XX°	: ±0.5°	DRAW: 黄彬 2022/04/21		CHECKED: 张伟 2022/04/21		APPROVED: 罗小春 2022/04/21
				PAGE	1/1			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [hanxia](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)
[65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[803-43-024-10-001000](#)