
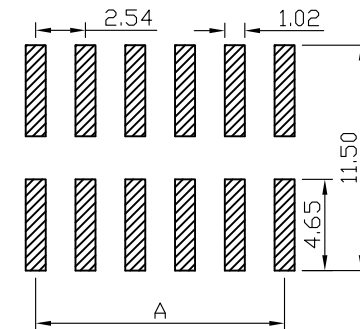

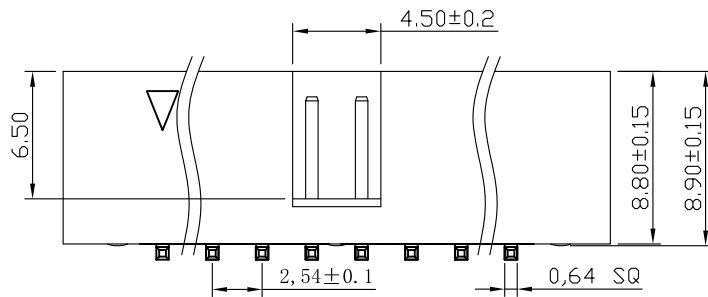


## SPECIFICATIONS

Current Rating: 3Amps  
 Insulation Resistance: 1000M $\Omega$  Min  
 Contact Resistance: 20m $\Omega$  Max  
 Withstanding Voltage: AC 1000V  
 Operation Temperature: -40° to +105°  
 Contact Material: Brass  
 Insulator Material: Polyester (UL 94V-0)  
 Contact plating: Gold Flash  
 Standard: PA6T  
 Max. Processing Temp: 240° C for 30-60 seconds  
 (260° C for 10 seconds)

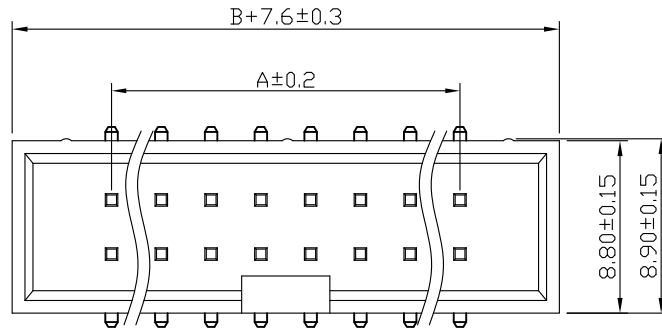

RECOMMEND P. C. B LAYOUT  
 PCB TOLERANCE:  $\pm 0.05$  (TOP VIEW)


**韩下** 深圳市韩下电子有限公司

UNLESS OTHERWISE SPECIFIED TOLERANCE

X :  $\pm 0.30$  X° :  $\pm 5^\circ$   
 X.X :  $\pm 0.25$  X.X° :  $\pm 1^\circ$   
 X.XX :  $\pm 0.20$  X.XX° :  $\pm 0.5^\circ$

DRAWN NAME:

HX JN2.54-2x10P TP H8.9

|      |    |       |     |            |
|------|----|-------|-----|------------|
| SIZE | A4 | SCALE | N:1 | PROUCT NO. |
| REV  | A  | UNIT  | mm  | PROJECT    |

PAGE 1/1  
 APPROVED: 罗小春 2020.11.18

DRAWNED: 黄彬 2020.11.18  
 CHECKED: 张伟 2020.11.18

| No. of | DIM. A | DIM. B | No. of | DIM. A | DIM. B | No. of | DIM. A | DIM. B |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 6      | 5.08   | 7.62   | 20     | 22.86  | 25.40  | 36     | 43.18  | 45.72  |
| 8      | 7.62   | 10.16  | 24     | 27.94  | 30.48  | 40     | 48.26  | 50.80  |
| 10     | 10.16  | 12.70  | 26     | 30.48  | 33.02  | 44     | 53.34  | 55.88  |
| 12     | 12.70  | 15.24  | 28     | 33.02  | 35.56  | 50     | 60.96  | 63.50  |
| 14     | 15.24  | 17.78  | 30     | 35.56  | 38.10  | 60     | 73.66  | 76.20  |
| 16     | 17.78  | 20.32  | 32     | 38.10  | 40.64  | 64     | 78.74  | 81.28  |
| 18     | 20.32  | 22.86  | 34     | 40.64  | 43.18  |        |        |        |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [hanxia](#) manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)  
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)  
[65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)  
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)  
[803-43-024-10-001000](#)