
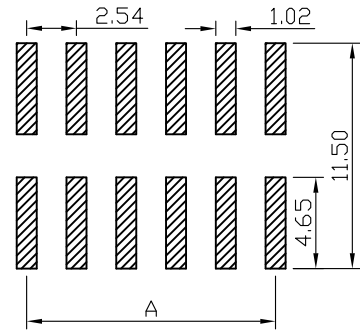

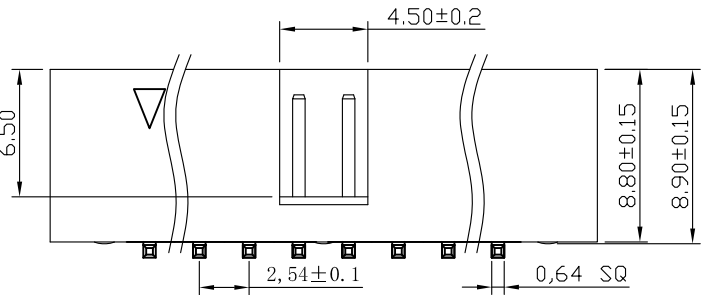


SPECIFICATIONS


Current Rating: 3Amps
 Insulation Resistance: 1000MΩ Min
 Contact Resistance: 20mΩ Max
 Withstanding Voltage: AC 1000V
 Operation Temperature: -40° to+105°
 Contact Material: Brass
 Insrlator Material: Polyester(UL 94V-0)
 Contact plating: Gold Flash
 Standard: PA6T
 Max.Processing Temp: 240° C for30-60seconds
 (260° C for10seconds)

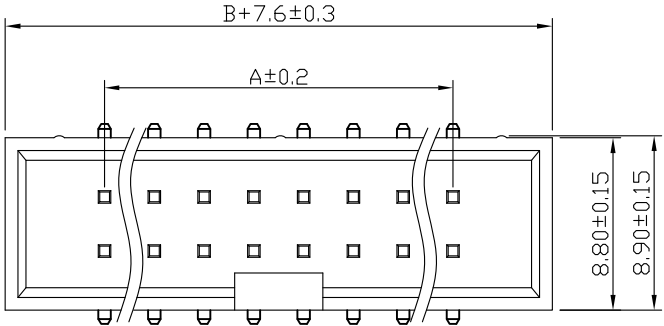

RECOMMEND P. C. B LAYOUT
 PCB TOLERANCE: ±0.05 (TOP VIEW)

 韩下 HANXIA 深圳市韩下电子有限公司

UNLESS OTHEWIXE SPECIFIED TOLERANCE
 X : ±0.30 X° : ±5°
 X.X : ±0.25 X.X° : ±1°
 X.XX : ±0.20 X.XX° : ±0.5°

DRAWM NAME: HX JN2.54-2x4P TP H8.9
 SIZE A4 SCALE N:1 PROUCT NO.
 REV A UNIT mm PROJECT  PAGE 1/1

DRAWNED: 黄彬 2020.11.18 CHECKED: 张伟 2020.11.18 APPROVED: 罗小春 2020.11.18

| No. of | DIM. A | DIM. B | No. of | DIM. A | DIM. B | No. of | DIM. A | DIM. B |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 6 | 5.08 | 7.62 | 20 | 22.86 | 25.40 | 36 | 43.18 | 45.72 |
| 8 | 7.62 | 10.16 | 24 | 27.94 | 30.48 | 40 | 48.26 | 50.80 |
| 10 | 10.16 | 12.70 | 26 | 30.48 | 33.02 | 44 | 53.34 | 55.88 |
| 12 | 12.70 | 15.24 | 28 | 33.02 | 35.56 | 50 | 60.96 | 63.50 |
| 14 | 15.24 | 17.78 | 30 | 35.56 | 38.10 | 60 | 73.66 | 76.20 |
| 16 | 17.78 | 20.32 | 32 | 38.10 | 40.64 | 64 | 78.74 | 81.28 |
| 18 | 20.32 | 22.86 | 34 | 40.64 | 43.18 | | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [hanxia](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)
[65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[803-43-024-10-001000](#)