

Customer Information Sheet

DRAWING No.: M80-263F2XX-XX-XX


IF IN DOUBT - ASK

©

NOT TO SCALE


THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

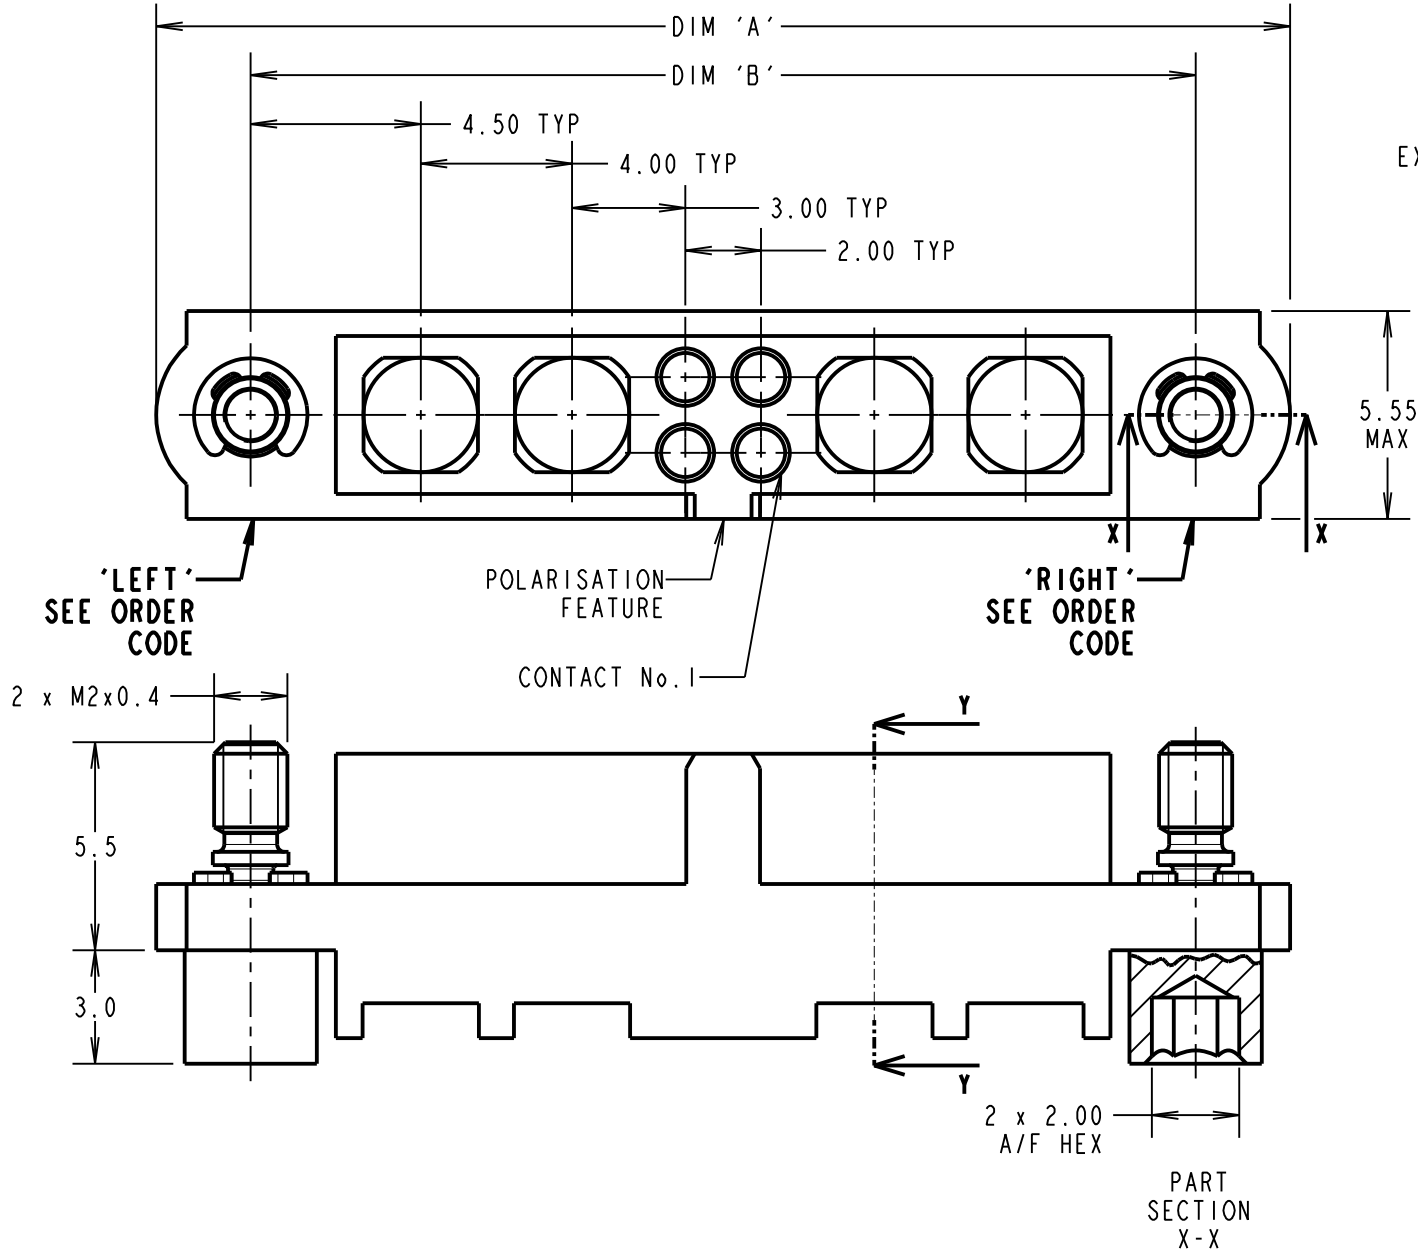


EXAMPLE CONFIGURATION:
M80-263F202-04-02

EXAMPLE CONFIGURATION:
M80-263F206-00-00

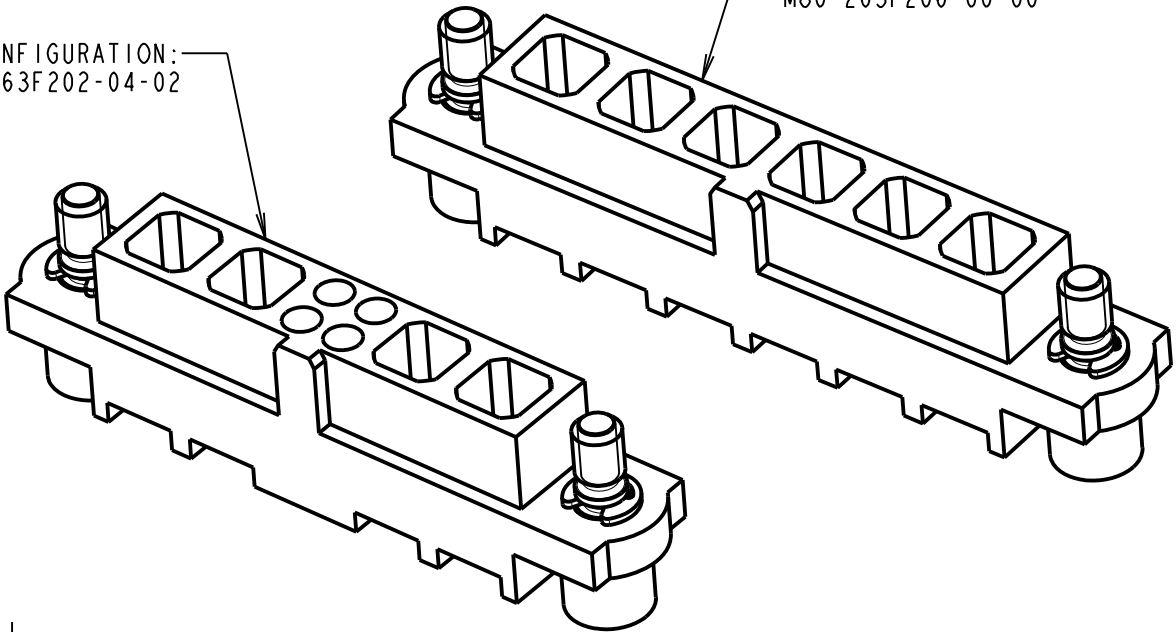

- NOTES:
- CONNECTORS ARE SUPPLIED WITHOUT CONTACTS.
 - SUITABLE FOR FEMALE CABLE POWER, COAXIAL AND SIGNAL DATAMATE CONTACTS - FOR MORE INFORMATION PLEASE VISIT HARWIN.COM.
 - FOR MECHANICAL AND ELECTRICAL SPECIFICATION SEE COMPONENT SPECIFICATION C005XX (LATEST ISSUE).

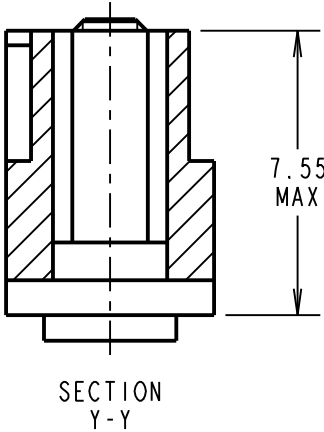

ORDER CODE:
M80-263F2XX-XX-XX

TOTAL No. OF SPECIAL CONTACTS BEFORE No.1 (RIGHT):
00 TO 12

TOTAL No. OF SIGNAL CONTACTS:
00 TO 50 (EVEN NUMBERS ONLY)

TOTAL No. OF SPECIAL CONTACTS AFTER No.1 (LEFT):
00 TO 12

SINGLE SPECIAL CONTACT HAS EQUIVALENT FOOTPRINT OF 4 SIGNAL CONTACTS. EACH MOULDING CAN HOUSE A MAXIMUM OF 50 SIGNAL CONTACTS PROVIDING THERE ARE NO SPECIAL CONTACTS, OR 12 SPECIAL CONTACTS PROVIDING THERE ARE NO SIGNAL CONTACTS, AND ALL CONFIGURATIONS BETWEEN.

IF THERE ARE NO SIGNAL CONTACTS, USE ONLY THE FIRST SPECIAL CONTACT QTY I.E. M80-263F2XX-00-00

DIMENSION	CALCULATIONS
DIM 'A'	((4 x No. OF SPECIAL CONTACTS) + No. OF SIGNAL CONTACTS) + 10.0
DIM 'B'	((4 x No. OF SPECIAL CONTACTS) + No. OF SIGNAL CONTACTS) + 5.0
EXAMPLES: CONNECTOR WITH 02 RIGHT (BEFORE No.1) SPECIAL CONTACTS, 04 SIGNAL CONTACTS AND 02 LEFT (AFTER No.1) SPECIAL CONTACTS, M80-263F202-04-02 DIM 'A' = 30.00mm, DIM 'B' = 25.00mm	
CONNECTOR WITH NO SIGNAL CONTACTS, AND 06 SPECIAL CONTACTS, M80-263F206-00-00 DIM 'A' = 34.00mm, DIM 'B' = 29.00mm	

RA	2	21.08.20	30137
NAME	ISS.	DATE	CN/CO
APPROVED: R.ALEXANDER			
CHECKED: R.PORTLOCK			
DRAWN: R.PORTLOCK			
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

www.harwin.com
technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
X. = ±1mm
X.X = ±0.50mm
X.XX = ±0.20mm
X.XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED

MATERIAL:
SEE ABOVE
FINISH: SEE ABOVE
S/AREA: - mm²

TITLE: JACKSCREW DATAMATE MIXED TECHNOLOGY FEMALE CRIMP MOULDING WITH HARDWARE

DRAWING NUMBER:
M80-263F2XX-XX-XX

SHT
2 OF 2

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) ***category:***

Click to view products by [Harwin](#) ***manufacturer:***

Other Similar products are found below :

[0010894062](#) [0010977306](#) [0015477636](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [636-1030](#) [641938-9](#) [65692-001LF](#) [65781-018](#) [65817-010LF](#) [65817-015LF](#) [68645-018](#) [699319-000](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [MMS10801TSV](#) [850-10-006-10-001000](#) [852-10-016-10-001000](#) [852-10-026-10-001000](#) [856-10-002-40-001000](#) [PH2-08-SGA](#) [90309-118LF](#) [90309-912LF](#) [93111-517LF](#) [94277-110LF](#) [98031-0001](#) [98416-S06B16ULF](#) [99.234.9999](#) [99.234.9999.6](#) [99.238.9999.6](#) [99.242.9999.6](#) [1-2169662-0](#) [1-2169663-0](#) [1-22284-0](#) [DAMM3W3PA183](#) [134-10-308-00-020000](#) [1347260000](#)