

# **XC32M4**

## QUARTZ CRYSTAL UNIT IN SMD 3.2x2.5mm CERAMIC SEAM SEAL PACKAGE.

#### PRODUCT FEATURES


- Small dimensions 3.2x2.5x0.6 with 4 solder pads.
- Highly reliable vacuum seam sealed ceramic package.
- Tight tolerances and stabilities over temperature range.
- Automotive compliance to AEC-Q200.
- ROHS compliant, LEAD-FREE and HALOGEN-FREE.

#### **APPLICATIONS**

• Wireless LAN

- Mobil communication
- Bluetooth Handheld equipment


## PRODUCT PHOTO (NOT IN SCALE)



#### PRODUCT SPECIFICATIONS

| PARAMETER                    | XC32M4                   |              | CONDITIONS / REMARKS     |
|------------------------------|--------------------------|--------------|--------------------------|
| Nominal frequency range      | 8.000 ~ 60.000MHz        |              |                          |
| Crystal cut and mode         | AT-cut / Fundamental     |              |                          |
| Frequency tolerance          | ±10ppm / ±20ppm / ±30ppm |              | Other options available. |
| Frequency stability          | ±10ppm                   | ±15ppm       | Other options available. |
| Operating temperature range  | −20 to +70°C             | −30 to +85°C | Other options available. |
| Equivalent series resistance | <100Ω                    |              | 12.000 to 15.999MHz      |
|                              | <80Ω                     |              | 16.000 to 18.999MHz      |
|                              | <60Ω<br><40Ω             |              | 19.000 to 29.999MHz      |
|                              |                          |              | 30.000 to 54.000MHz      |
| Load capacitance             | 6 ~ 32pF or SERIES       |              | Please specify.          |
| Shunt capacitance            | <3.0pF                   |              |                          |
| Drive level                  | 100μω ΤΥΡ / 300μω ΜΑΧ    |              |                          |
| Storage temperature range    | −55 to +125°C            |              |                          |


## PACKAGE OUTLINE / DIMENSIONS

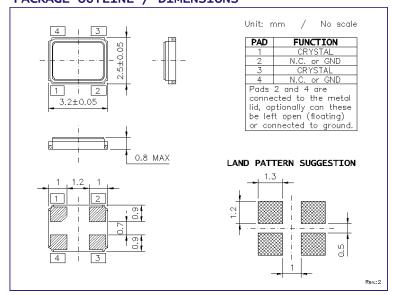

### PACKAGING INFORMATION

- Tape & Reel compliant to EIA-481.
- Embossed carrier width 8mm.
- Component pitch in carrier 4mm.
- Reel diameter 180mm.
- QTY per reel: 3,000pcs MAX.

#### RECOMMENDED REFLOW PROFILE



# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Crystals category:

Click to view products by HCI manufacturer:

Other Similar products are found below:

CX3225GB25000M0PPSZ1 718-13.2-1 MC405 32.0000K-R3:PURE SN 7A-40.000MAAE-T FL2000085 99-BU 9B-15.360MBBK-B 9C-7.680MBBK-T H10S-12.000-18-EXT-TR ABC2-6.000MHZ-D4Z-T ABLS-20.000MHZ-D2-T ABS071-32.768KHZ-6-T R38-32.768-12.5-5PPM-NPB BTD1062E05A-513 21U15A-21.4MHZ RTX-781DF1-S-20.950 LFXTAL066198Cutt 9C-14.31818MBBK-T A-11.000MHZ-27 ABL-27.000MHZ-B4Y-T ABM11-132-24.000MHZ-T3 ABM3B1-25.000MHZ-D2Y-T SPT2A-.032768B SPT2A.032768G SSPT7F-9PF20-R FX325BS-38.88EEM1201 LFXTAL065253Cutt LFXTAL066431Cutt XT9S20ANA14M7456 XT9SNLANA16M 7A-24.576MBBK-T 7B-30.000MBBK-T 7A-14.31818MBBK-T 6504-202-1501 6526-202-1501 ABLS-12.000MHZ-B2Y-T 7A-10.000MBBK-T SG636PCE-20.000MC 3404 E1SAA18-25.000M TR CM315D32768EZFT C1E-24.000-7-2020-R C1E-19.200-12-1530-X-R C1E-16.000-12-1530-X-R ABM11-16.000MHZ-9-B1U-T FL5000014 EUCA18-3.1872M FX0800015 425F35E027M0000 FP0800018