


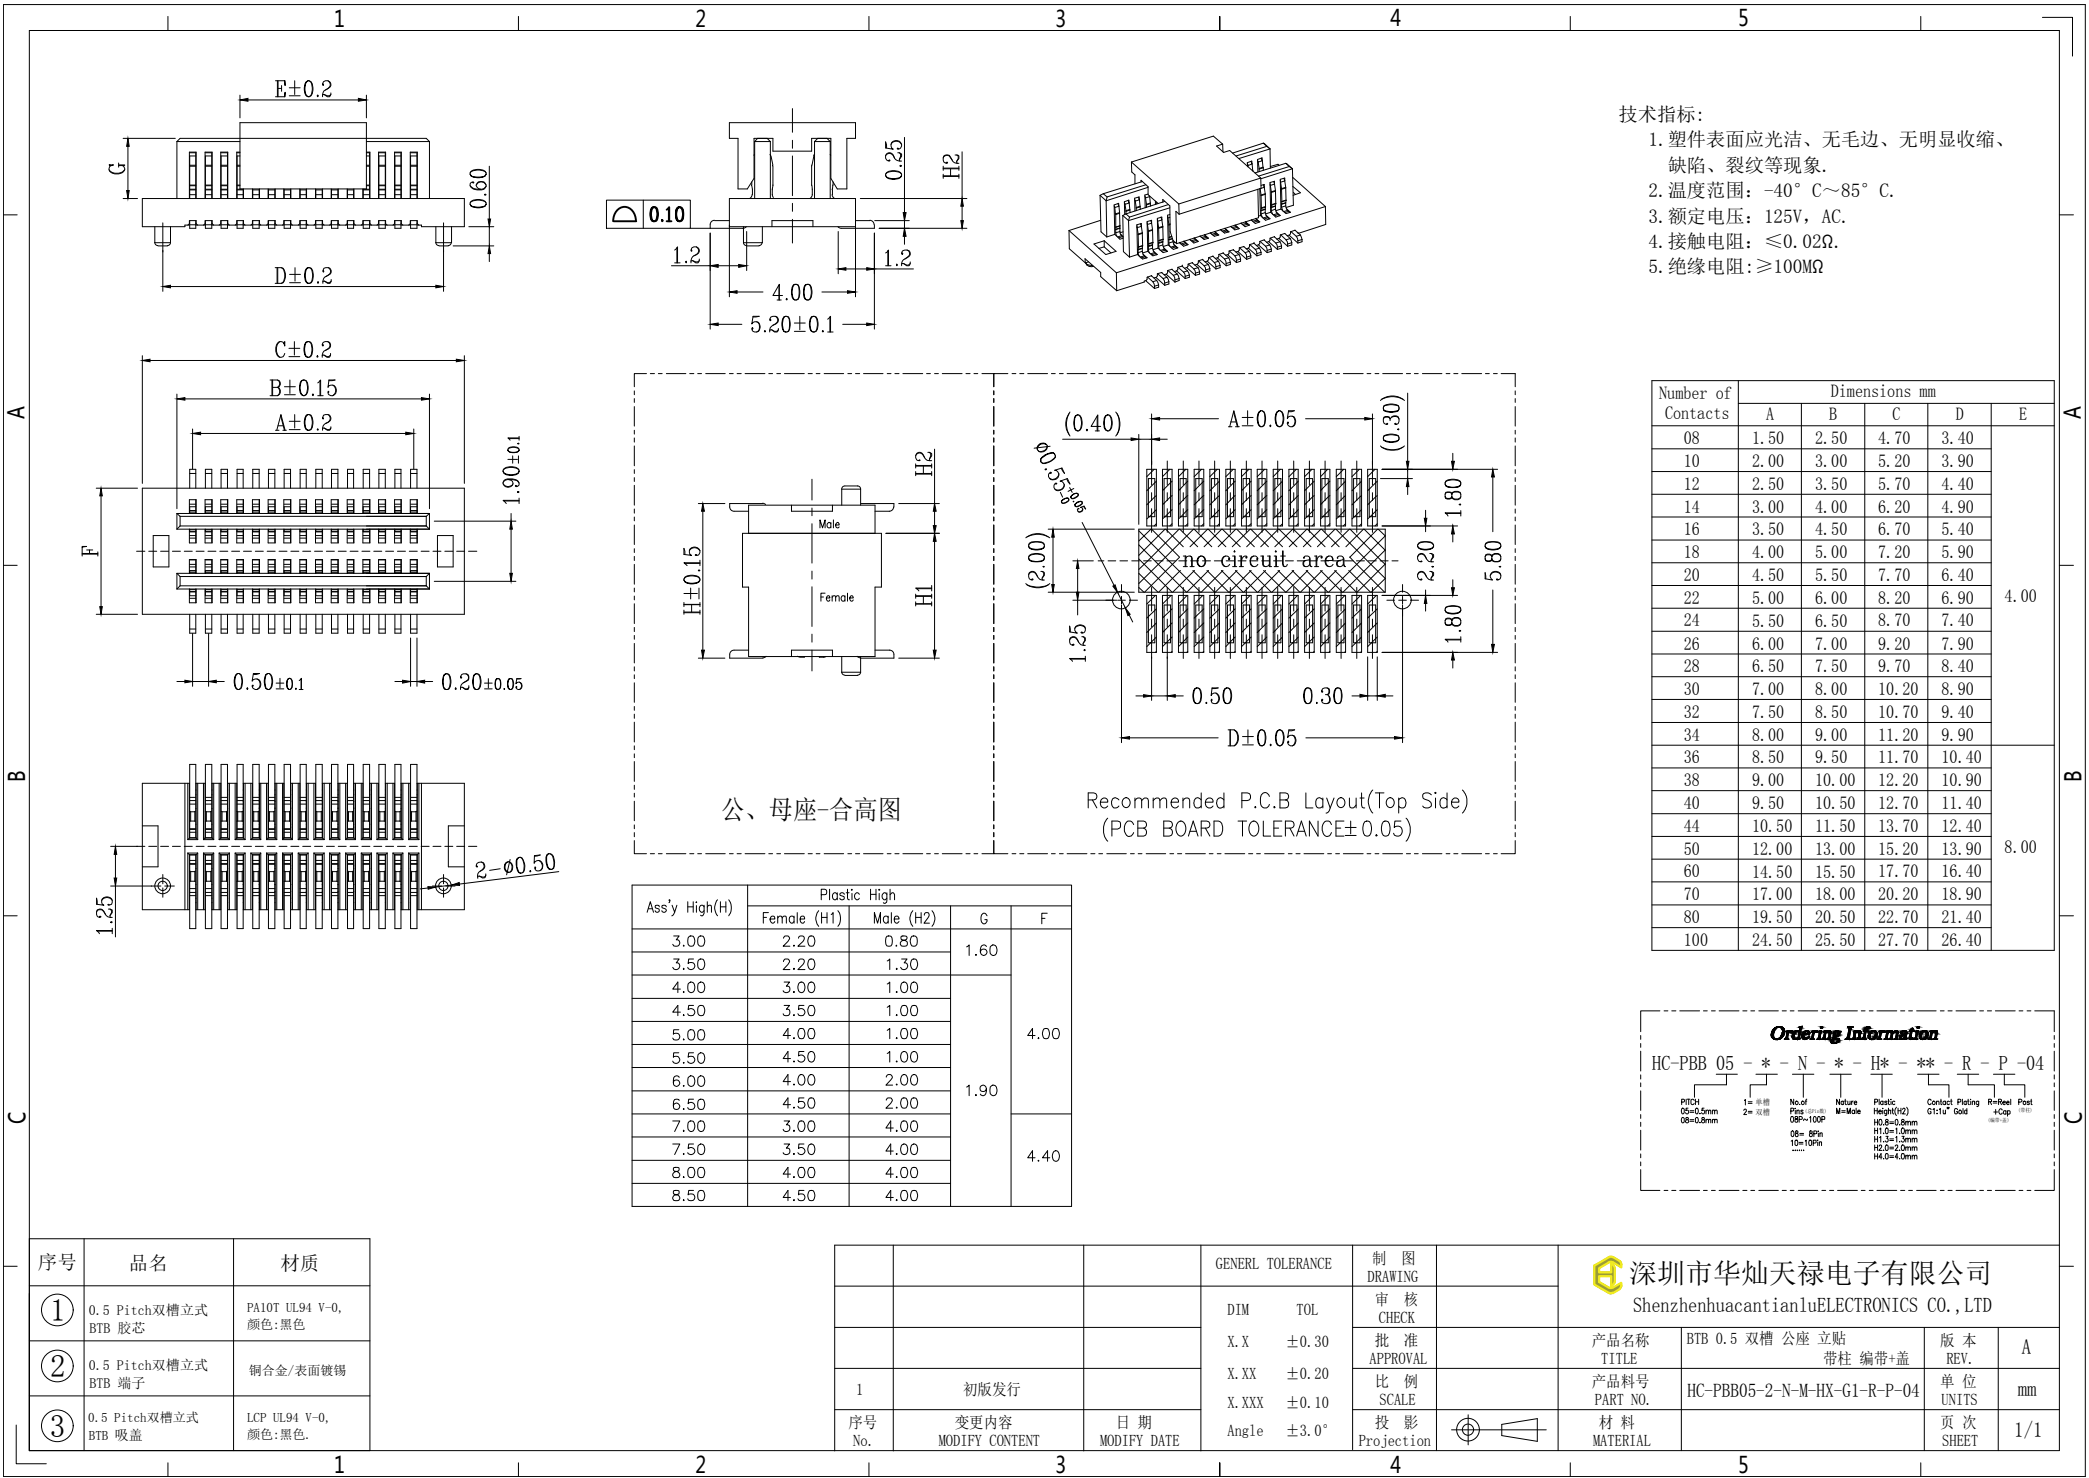

- 技术指标:
1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象.
 2. 温度范围: $-40^{\circ}\text{C}\sim 85^{\circ}\text{C}$.
 3. 额定电压: 125V, AC.
 4. 接触电阻: $\leq 0.02\Omega$.
 5. 绝缘电阻: $\geq 100\text{M}\Omega$

公、母座-合高图

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

Ass'y High(H)	Plastic High		G	F
	Female (H1)	Male (H2)		
3.00	2.20	0.80	1.60	4.00
3.50	2.20	1.30		
4.00	3.00	1.00		
4.50	3.50	1.00		
5.00	4.00	1.00	1.90	
5.50	4.50	1.00		
6.00	4.00	2.00		
6.50	4.50	2.00		
7.00	3.00	4.00		
7.50	3.50	4.00	4.40	
8.00	4.00	4.00		
8.50	4.50	4.00		

Number of Contacts	Dimensions mm				
	A	B	C	D	E
08	1.50	2.50	4.70	3.40	4.00
10	2.00	3.00	5.20	3.90	
12	2.50	3.50	5.70	4.40	
14	3.00	4.00	6.20	4.90	
16	3.50	4.50	6.70	5.40	
18	4.00	5.00	7.20	5.90	
20	4.50	5.50	7.70	6.40	
22	5.00	6.00	8.20	6.90	
24	5.50	6.50	8.70	7.40	
26	6.00	7.00	9.20	7.90	
28	6.50	7.50	9.70	8.40	
30	7.00	8.00	10.20	8.90	
32	7.50	8.50	10.70	9.40	
34	8.00	9.00	11.20	9.90	
36	8.50	9.50	11.70	10.40	
38	9.00	10.00	12.20	10.90	
40	9.50	10.50	12.70	11.40	8.00
44	10.50	11.50	13.70	12.40	
50	12.00	13.00	15.20	13.90	
60	14.50	15.50	17.70	16.40	
70	17.00	18.00	20.20	18.90	
80	19.50	20.50	22.70	21.40	
100	24.50	25.50	27.70	26.40	

Ordering Information									
HC-PBB 05 - * - N - * - H* - ** - R - P -04									
Pitch 05=0.5mm 08=0.8mm	1= 单排 2= 双排	No of Pins 08=10Pin 08=10Pin 10=10Pin 10=10Pin	Nature M=Male	Plastic Height(H2) H2=0.6mm H2=1.0mm H2=1.3mm H2=2.0mm H2=4.0mm	Contact G11u" Gold	Plating G11u" Gold	R=Reel P=Post (4000)		

序号	品名	材质
①	0.5 Pitch双槽立式 BTB 胶芯	PA10T UL94 V-0, 颜色:黑色
②	0.5 Pitch双槽立式 BTB 端子	铜合金/表面镀锡
③	0.5 Pitch双槽立式 BTB 吸盖	LCP UL94 V-0, 颜色:黑色

		GENERAL TOLERANCE	制图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
		DIM TOL	审核 CHECK	产品名称 TITLE	BTB 0.5 双槽 公座 立贴 带柱 编带+盖	版本 REV.	A
		X.X ± 0.30	批准 APPROVAL	产品料号 PART NO.	HC-PBB05-2-N-M-HX-G1-R-P-04	单位 UNITS	mm
		X.XX ± 0.20	比例 SCALE	材料 MATERIAL		页次 SHEET	1/1
		X.XXX ± 0.10	投影 Projection				
		Angle $\pm 3.0^{\circ}$					
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE					

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board to Board & Mezzanine Connectors](#) ***category:***

Click to view products by [HCTL](#) ***manufacturer:***

Other Similar products are found below :

[589158040000018](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [93696-330](#) [FCN-235D050-G/C](#) [210-93-314-41-105000](#) [55323-1519](#) [0716612340](#) [101A10019X](#) [105061100000861+](#) [75140-7012](#) [87471-650](#) [1744382-4](#) [063209](#) [LST-110-07-T-D](#) [68685-603](#) [8-1616154-3](#) [IL-WX-10PB-HF-B-E1000E](#) [FCN-214J100-G/0](#) [P50-028-DDS-TG](#) [53309-2471](#) [1586617-1](#) [504248-1210](#) [NDS100-004-BF](#) [91922-31141LF](#) [505274-3440](#) [501493-2410](#) [504208-3410](#) [505006-0811](#) [505274-2040](#) [202436-1600](#) [202477-0414](#) [71607-302ALF](#) [71660-7580](#) [73420-5192](#) [ESMC-M-80-SGR-SMT-T/R](#) [AC01S050WA1R500](#) [IL-WX-20SB-VF-B-E1000E](#) [354949](#) [1104021](#) [BK13C06-32DP/2-0.35V\(865\)](#) [ACC-140-0722-00](#) [BK13C06-40DS/2-0.35V\(865\)](#) [3511216BMSS0BNA1](#) [BB51-84AT-1-3HB](#) [BA41-40CT-1-NHB](#) [BA41-80CT-0-NHB](#) [20-AH20S-16B00-001](#)