
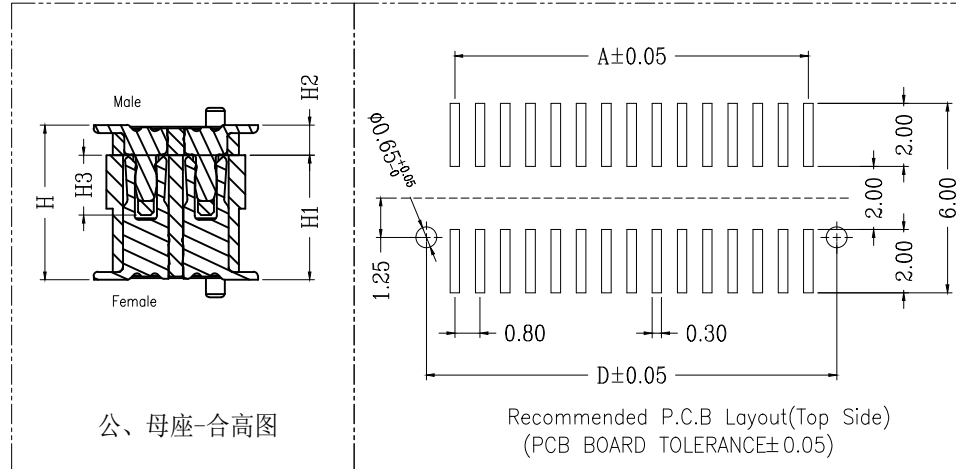


技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$ 。
3. 额定电压: 125V, AC。
4. 接触电阻: $\leq 0.02\Omega$ 。
5. 绝缘电阻: $\geq 100\text{M}\Omega$ 。

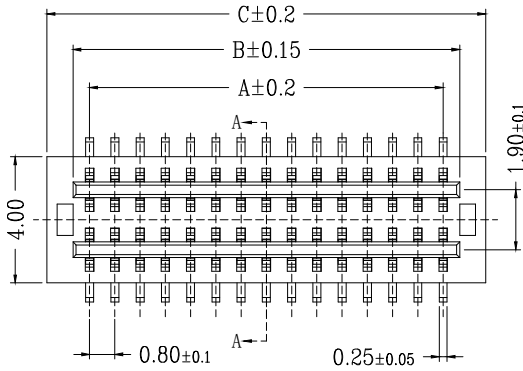

公、母座—合高图

Ass'y High(H)	Plastic High		Insertion (H3)
	Female 母(H1)	Male 公(H2)	
4.00	3.00	1.00	1.90
4.50	3.50	1.00	
5.00	3.00/4.00	2.00/1.00	
5.50	3.50/4.50	2.00/1.00	
6.00	4.00	2.00	
6.50	4.50	2.00	
7.00	3.00	4.00	
7.50	3.50	4.00	
8.00	4.00	4.00	
8.50	4.50	4.00	

Number of Contacts	Dimensions mm				
	A	B	C	D	E
08	2.40	3.45	5.10	4.20	4.00
10	3.20	4.25	5.90	5.00	
12	4.00	5.05	6.70	5.80	
14	4.80	5.85	7.50	6.60	
16	5.60	6.65	8.30	7.40	
18	6.40	7.45	9.10	8.20	
20	7.20	8.25	9.90	9.00	
22	8.00	9.05	10.70	9.80	
24	8.80	9.85	11.50	10.60	
26	9.60	10.65	12.30	11.40	
28	10.40	11.45	13.10	12.20	8.00
30	11.20	12.25	13.90	13.00	
32	12.00	13.05	14.70	13.80	
34	12.80	13.85	15.50	14.60	
36	13.60	14.65	16.30	15.40	
38	14.40	15.45	17.10	16.20	
40	15.20	16.25	17.90	17.00	
44	16.80	17.85	19.50	18.60	
50	19.20	20.25	21.90	21.00	
60	23.20	24.25	25.90	25.00	
70	27.20	28.25	29.90	29.00	
80	31.20	32.25	33.90	33.00	
100	39.20	40.30	41.90	41.00	

Ordering Information									
HC-PBB 08 - * - N - * - H* - ** - R - P - 04									
PITCH 05=0.5mm 08=0.8mm	1= 单槽 2= 双槽	No. of Pins 08P~100P	Gender M=Male F=Female	Plastic Height(H2) H1.2=1.2mm H2.2=2.2mm H4.0=4.0mm	Contact Plating G1:1u" Gold	R=Reel +Cap	Post	(180)	

序号	品名	材质
①	0.8 Pitch双槽立式 BTB 胶芯	PA10T UL94 V-0, 颜色:黑色
②	0.8 Pitch双槽立式 BTB 端子	铜合金/表面镀锡
③	0.8 Pitch双槽立式 BTB 吸盖	LCP UL94 V-0, 颜色:黑色

		GENERAL TOLERANCE	制图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
		DIM TOL	审核 CHECK	产品名称 TITLE	BTB 0.8 双槽 公座 立贴 带柱 编带+盖	版本 REV.	A
		X. X ±0.30	批准 APPROVAL	产品料号 PART NO.	HC-PBB08-2-N-M-HX-G1-R-P-04	单位 UNITS	mm
		X. XX ±0.20	比例 SCALE	材料 MATERIAL		页次 SHEET	1/1
		X. XXX ±0.10	投影 Projection				
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE					

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:

Click to view products by [HCTL](#) manufacturer:

Other Similar products are found below :

[589158040000018](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [93696-330](#) [FCN-235D050-G/C](#) [210-93-314-41-105000](#) [55323-1519](#) [0716612340](#) [101A10019X](#) [105061100000861+](#) [75140-7012](#) [87471-650](#) [1744382-4](#) [063209](#) [LST-110-07-T-D](#) [68685-603](#) [8-1616154-3](#) [IL-WX-10PB-HF-B-E1000E](#) [FCN-214J100-G/0](#) [P50-028-DDS-TG](#) [53309-2471](#) [1586617-1](#) [504248-1210](#) [NDS100-004-BF](#) [91922-31141LF](#) [505274-3440](#) [501493-2410](#) [504208-3410](#) [505006-0811](#) [505274-2040](#) [202436-1600](#) [202477-0414](#) [71607-302ALF](#) [71660-7580](#) [73420-5192](#) [ESMC-M-80-SGR-SMT-T/R](#) [AC01S050WA1R500](#) [IL-WX-20SB-VF-B-E1000E](#) [354949](#) [1104021](#) [BK13C06-32DP/2-0.35V\(865\)](#) [ACC-140-0722-00](#) [BK13C06-40DS/2-0.35V\(865\)](#) [3511216BMSS0BNA1](#) [BB51-84AT-1-3HB](#) [BA41-40CT-1-NHB](#) [BA41-80CT-0-NHB](#) [20-AH20S-16B00-001](#)