




- NOTES-
1. MATERIAL SEE TABLE;
 2. ELECTRICAL PERFORMANCES:
2-1. RATED CURRENT: 0.3A;
2-2. CONTACT RESISTANCE: 90mΩ Max. with AC 20mV, 1kHz and 1mA ;
2-3. INSULATION RESISTANCE: 50mΩ min. With DC 100v. ;
 3. MECHANICAL PERFORMANCES:
3-1. DURABILITY: 30 CYCLES;
3-2. OPERATION TEMPERATURE: -40℃ To +85℃;

ASSEMBLY

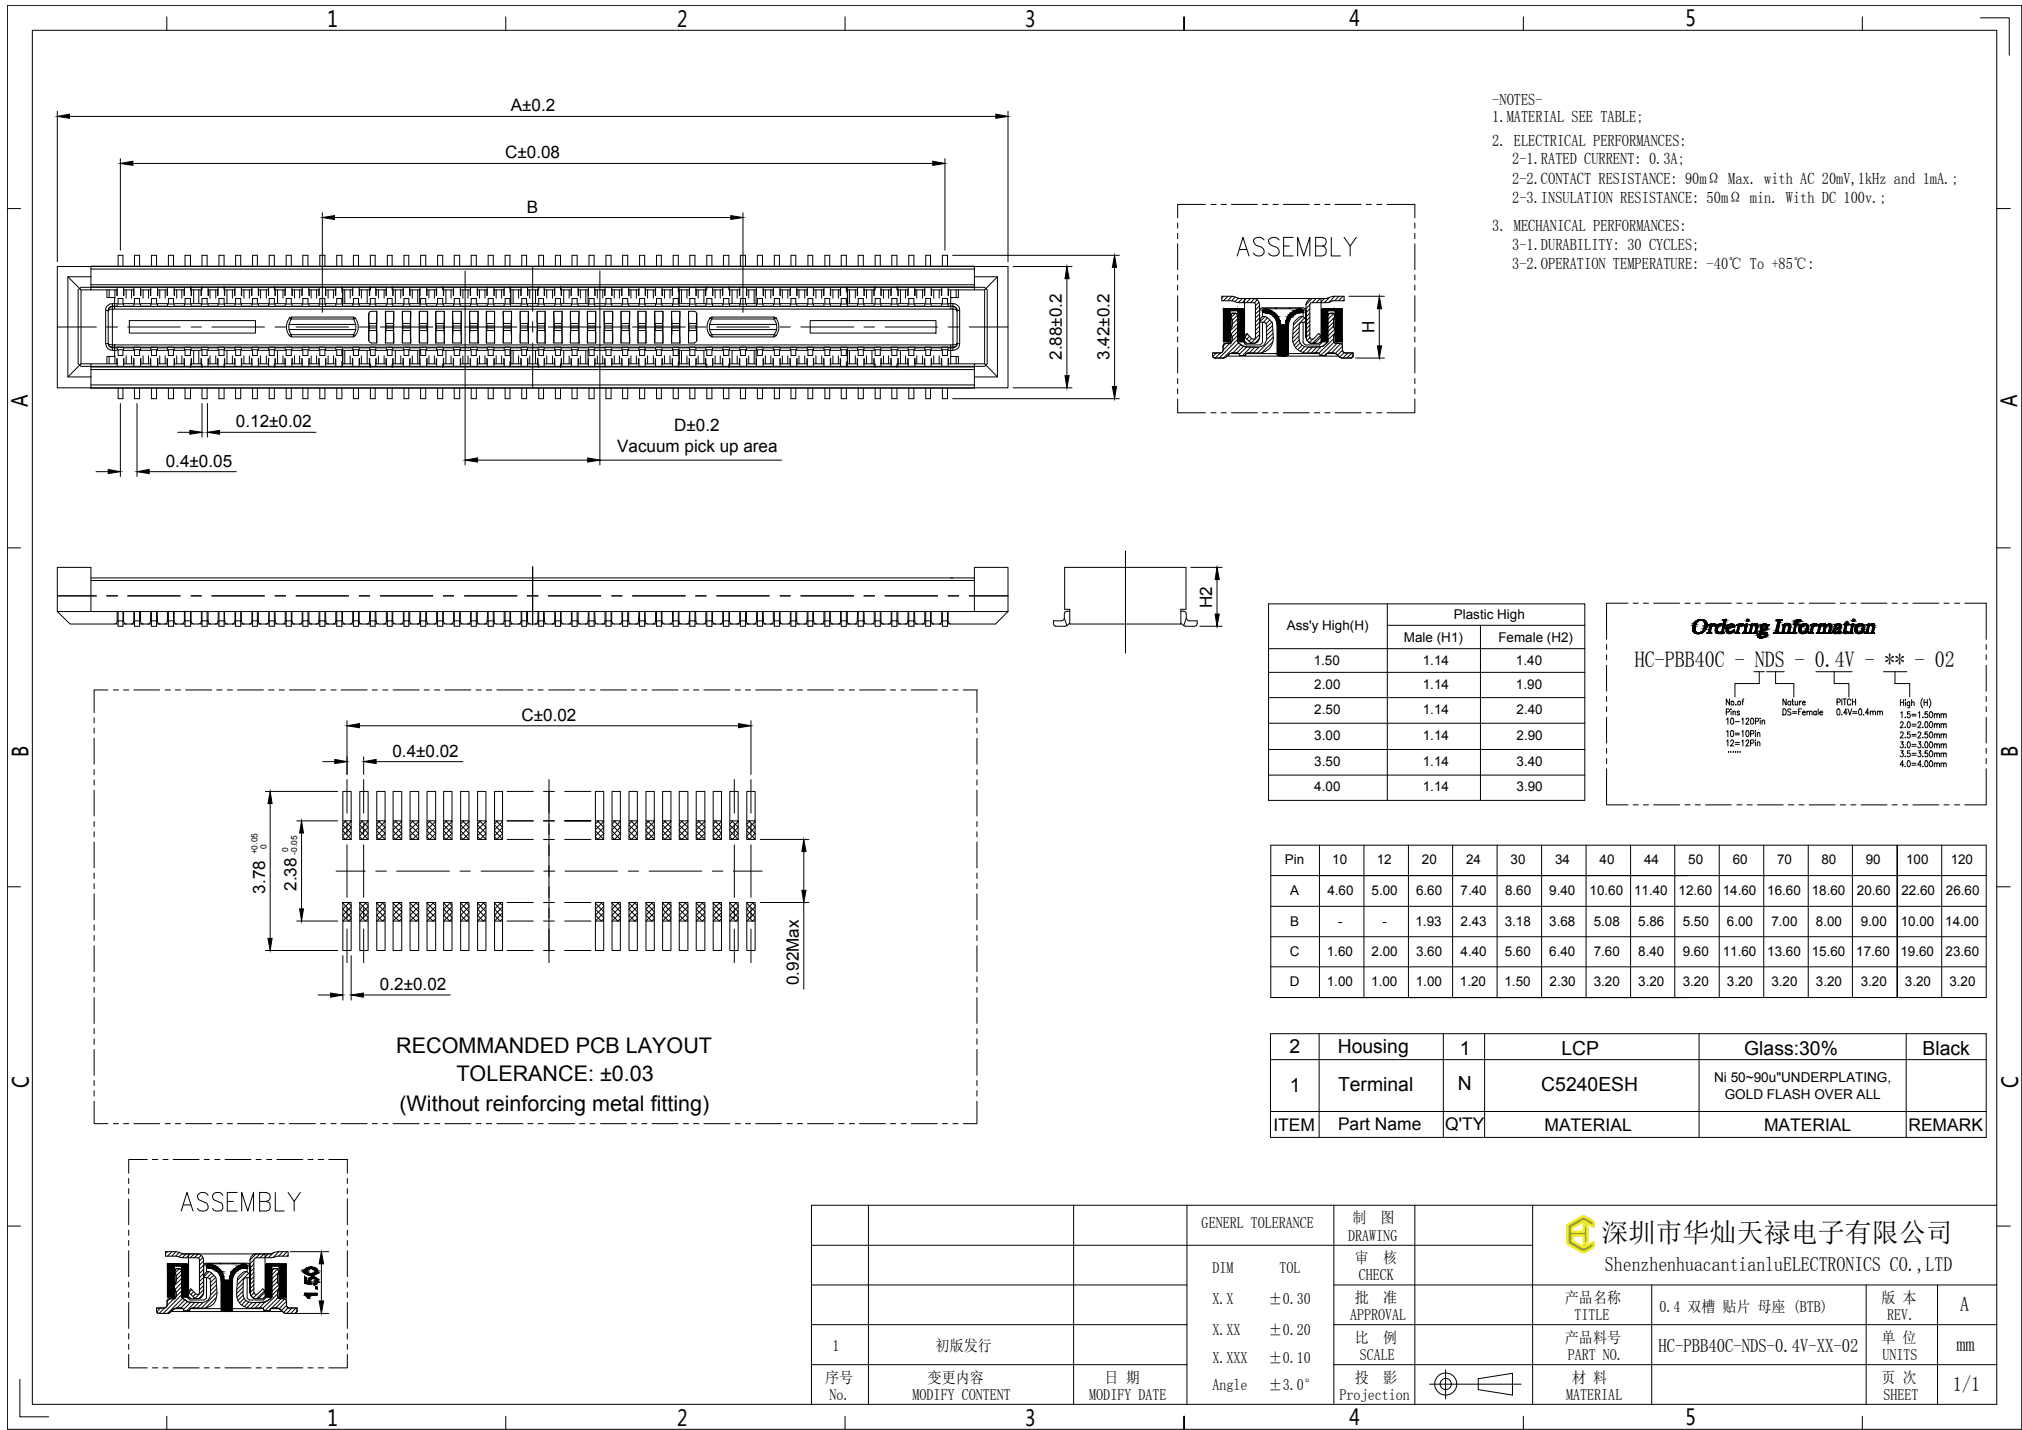

Ordering Information

HC-PBB40C - NDS - 0.4V - ** - 02

No. of Pins	Nature DS=Female	PITCH 0.4V=0.4mm	High (H)
10~120Pin			1.5=1.50mm
10=10Pin			2.0=2.00mm
12=12Pin			2.5=2.50mm
.....			3.0=3.00mm
			3.5=3.50mm
			4.0=4.00mm

Pin	10	12	20	24	30	34	40	44	50	60	70	80	90	100	120
A	4.60	5.00	6.60	7.40	8.60	9.40	10.60	11.40	12.60	14.60	16.60	18.60	20.60	22.60	26.60
B	-	-	1.93	2.43	3.18	3.68	5.08	5.86	5.50	6.00	7.00	8.00	9.00	10.00	14.00
C	1.60	2.00	3.60	4.40	5.60	6.40	7.60	8.40	9.60	11.60	13.60	15.60	17.60	19.60	23.60
D	1.00	1.00	1.00	1.20	1.50	2.30	3.20	3.20	3.20	3.20	3.20	3.20	3.20	3.20	3.20

2	Housing	1	LCP	Glass:30%	Black
1	Terminal	N	C5240ESH	Ni 50~90u"UNDERPLATING, GOLD FLASH OVER ALL	
ITEM	Part Name	Q'TY	MATERIAL	MATERIAL	REMARK

			GENERAL TOLERANCE		制 图	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM	TOL	DRAWING				
			X. X	±0.30	审 核	产品名称 TITLE	0.4 双槽 贴片 母座 (BTB)	版 本 REV.	A
			X. XX	±0.20	批 准				
			X. XXX	±0.10	APPROVAL				
1	初版发行				比 例	产品料号 PART NO.	HC-PBB40C-NDS-0.4V-XX-02	单 位 UNITS	mm
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle	±3.0°	投 影	材料 MATERIAL		页 次 SHEET	1/1
					Projection				

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board to Board & Mezzanine Connectors](#) ***category:***

Click to view products by [HCTL](#) ***manufacturer:***

Other Similar products are found below :

[589158040000018](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [93696-330](#) [FCN-235D050-G/C](#) [210-93-314-41-105000](#) [55323-1519](#) [0716612340](#) [101A10019X](#) [105061100000861+](#) [75140-7012](#) [87471-650](#) [1744382-4](#) [063209](#) [LST-110-07-T-D](#) [68685-603](#) [8-1616154-3](#) [IL-WX-10PB-HF-B-E1000E](#) [FCN-214J100-G/0](#) [P50-028-DDS-TG](#) [53309-2471](#) [1586617-1](#) [504248-1210](#) [NDS100-004-BF](#) [91922-31141LF](#) [505274-3440](#) [501493-2410](#) [504208-3410](#) [505006-0811](#) [505274-2040](#) [202436-1600](#) [202477-0414](#) [71607-302ALF](#) [71660-7580](#) [73420-5192](#) [ESMC-M-80-SGR-SMT-T/R](#) [AC01S050WA1R500](#) [IL-WX-20SB-VF-B-E1000E](#) [354949](#) [1104021](#) [BK13C06-32DP/2-0.35V\(865\)](#) [ACC-140-0722-00](#) [BK13C06-40DS/2-0.35V\(865\)](#) [3511216BMSS0BNA1](#) [BB51-84AT-1-3HB](#) [BA41-40CT-1-NHB](#) [BA41-80CT-0-NHB](#) [ASG8H2010](#)