
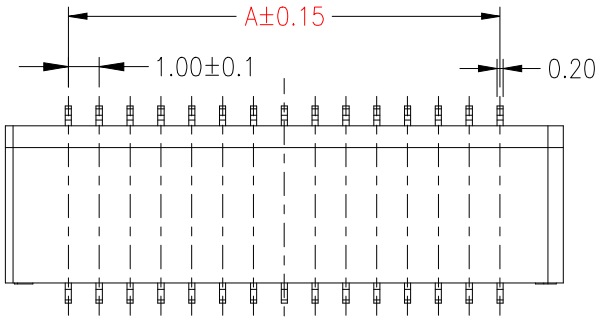

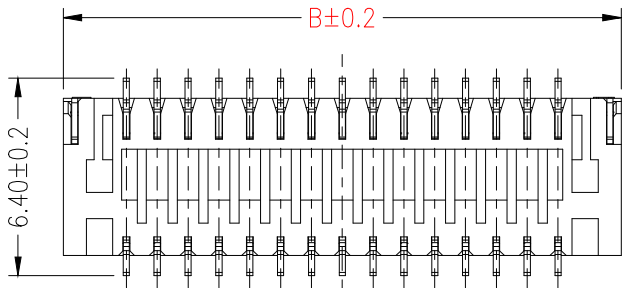
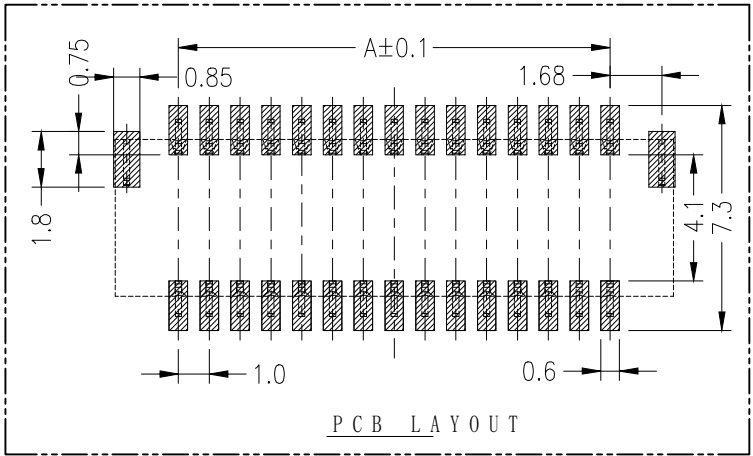








Specifications:
Poles:10 to 50
Contact resistance:≤20mΩ
Insulation resistance:≥100MΩ
Rated voltage:50V AC DC
Rated current:1.0A AC DC(AWG#28)
Withstand Voltage: 500V AC/minute
Temperature Range:-25°C~ +85°C
Housing:PA9T UL94V-0,Natural(Beige)
Contacts:Phosphor Bronze Au/Sn-plated
Solder Tabs:Brass Sn-plated

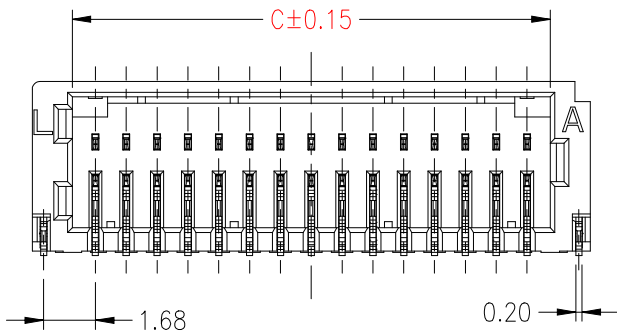

Circuit	Part NO.	Dimensions mm		
		A	B	C
5	HC-SHD-2x5PWT-G-04	4.00	8.10	5.50
6	HC-SHD-2x6PWT-G-04	5.00	9.10	6.50
7	HC-SHD-2x7PWT-G-04	6.00	10.10	7.50
8	HC-SHD-2x8PWT-G-04	7.00	11.10	8.50
9	HC-SHD-2x9PWT-G-04	8.00	12.10	9.50
10	HC-SHD-2x10PWT-G-04	9.00	13.10	10.50
15	HC-SHD-2x15PWT-G-04	14.00	18.10	15.50
20	HC-SHD-2x20PWT-G-04	19.00	23.10	20.50
25	HC-SHD-2x25PWT-G-04	24.00	28.10	25.50

Circuits	pcs/box	boxs/Carton	Pcs/Box
2x5~2x10 Pin	900	15	13500
2x15 Pin	900	11	9900
2x20~2x25 Pin	900	8	7200

			GENERAL TOLERANCE		制 图	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM	TOL	DRAWING				
					审 核				
			X. X	±0.30	CHECK				
			X. XX	±0.20	批 准				
			X. XXX	±0.10	APPROVAL				
			Angle	±3.0°	比 例				
					SCALE				
序号	变更内容	日期				产品名称	1.0 双排 卧贴 (Au)	版本	A
No.	MODIFY CONTENT	MODIFY DATE				TITLE		REV.	
						产品料号	HC-SHD-2xNPWT-G-04	单 位	mm
						PART NO.		UNITS	
						材料		页 次	1/1
						MATERIAL		SHEET	

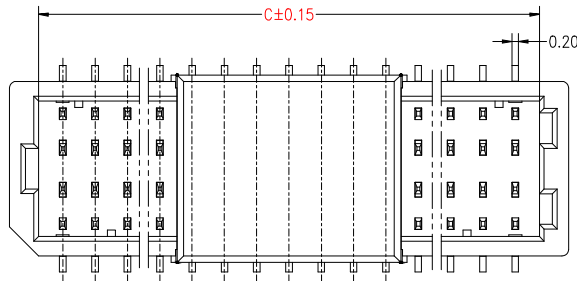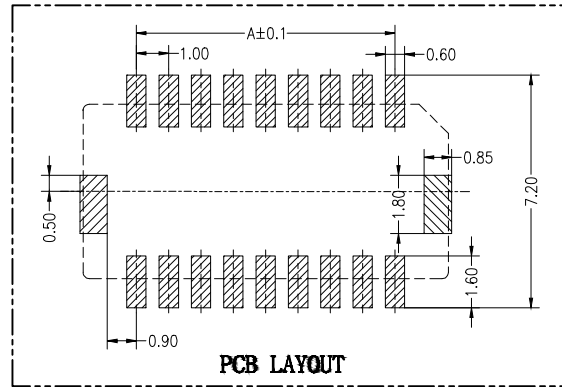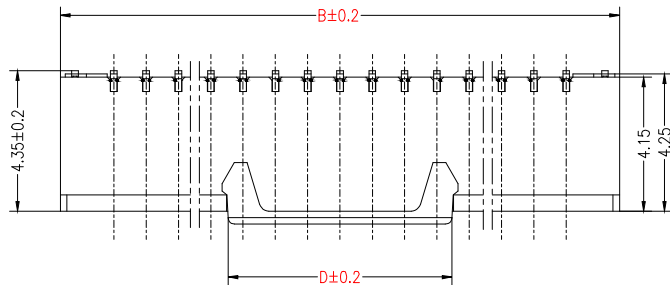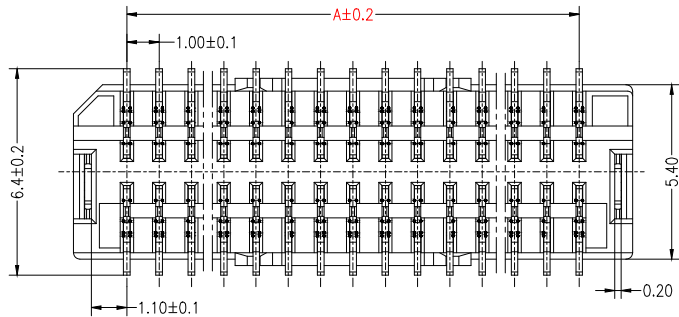

Specifications

Poles : 4 to 50

Contact resistance : $\leq 20\text{m}\Omega$

Insulation resistance : $\geq 100\text{M}\Omega$

Rated voltage : 50V AC DC

Rated current : 1.0A AC DC (AWG28#线)

Withstand Voltage : 500V AC/minute

Temperature Range : $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Circuit	Part NO.	Dimensions mm			
		A	B	C	D
2	HC-SHD-2x2PLT-G-04	1.00	4.30	2.50	麦拉
3	HC-SHD-2x3PLT-G-04	2.00	5.30	3.50	
4	HC-SHD-2x4PLT-G-04	3.00	6.30	4.50	
5	HC-SHD-2x5PLT-G-04	4.00	7.30	5.50	
6	HC-SHD-2x6PLT-G-04	5.00	8.30	6.50	4.00
7	HC-SHD-2x7PLT-G-04	6.00	9.30	7.50	
8	HC-SHD-2x8PLT-G-04	7.00	10.30	8.50	
9	HC-SHD-2x9PLT-G-04	8.00	11.30	9.50	
10	HC-SHD-2x10PLT-G-04	9.00	12.30	10.50	7.00
11	HC-SHD-2x11PLT-G-04	10.00	13.30	11.50	
12	HC-SHD-2x12PLT-G-04	11.00	14.30	12.50	
14	HC-SHD-2x14PLT-G-04	13.00	16.30	14.50	
15	HC-SHD-2x15PLT-G-04	14.00	17.30	15.50	
16	HC-SHD-2x16PLT-G-04	15.00	18.30	16.50	
18	HC-SHD-2x18PLT-G-04	17.00	20.30	18.50	
20	HC-SHD-2x20PLT-G-04	19.00	22.30	20.50	
25	HC-SHD-2x25PLT-G-04	24.00	27.30	25.50	

Circuits	pcs/box	boxes/Carton	Pcs/Box
2x2~2x5 Pin	1000	20	20000
2x6~2x12 Pin	1000	15	15000
2x14~2x18 Pin	1000	11	11000
2x20~2x25 Pin	1000	8	8000

			GENERAL TOLERANCE		制图	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM	TOL	DRAWING				
			X.X	± 0.30	审核	产品名称 TITLE	1.0 双排 立贴 (Au)	版本 REV.	A
			X.XX	± 0.20	批准				
			X.XXX	± 0.10	APPROVAL				
1	初版发行				比例	产品料号	HC-SHD-2xNPLT-G-04	单位	mm
序号	变更内容	日期			SCALE	PART NO.		UNITS	
No.	MODIFY CONTENT	MODIFY DATE			Angle	投影	材料	页次	1/1
					$\pm 3.0^{\circ}$	Projection	MATERIAL	SHEET	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [HCTL](#) manufacturer:

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [009176003701906](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#)
[65781-018](#) [65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#)
[M90C108951C](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-](#)
[3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#)
[803-43-024-10-001000](#)