SPECIFICATIONS
Current Rating:3.0AMP
Contact Resistance:10mΩMax
Dielectric Strength:Min 1000V RMS
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Clip(4/6 finger):Becu(C17200)
Accepted Pin:ø0.40 to 0.60mm
Insulator Material:Polyester(UL94V-0)
Standard: PPS
Soldering temperature: 260°C±5° 5S

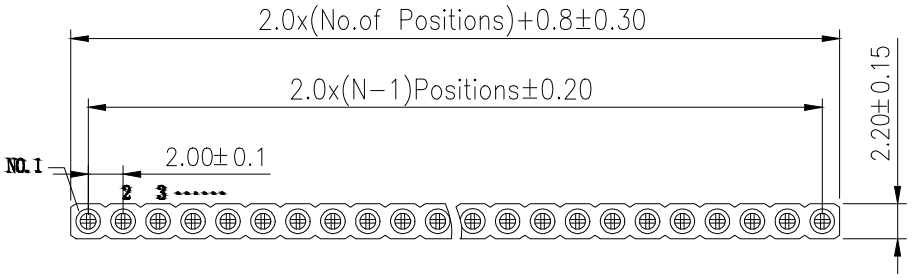

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

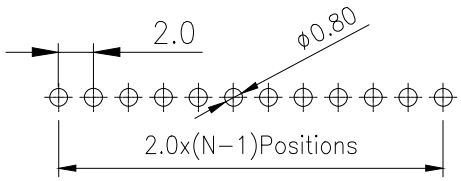

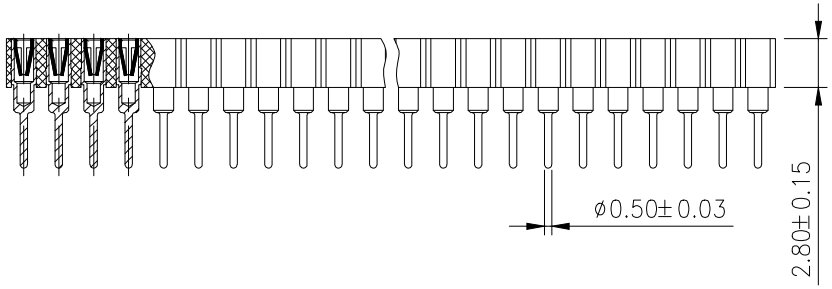



Ordering Information

PM 200 - * - N - Z - * - ** - C

- No.of Rows: 1=Single Row, 2=Dual Row
- No.of Pins: 2-40Pin
- Type: Z-直针 R-弯针 S-沉板 W-卧板
- Length: (型高)
- Contact Plating: G0:Gold Flash; G1:1u" Gold; G2:3u" Gold; G3:5u" Gold; G4:10u" Gold; G5:15u" Gold; G6:30u" Gold; S0:Gold Flash/Tin; S1:Tin
- Round Pin: (圆针)

			GENERL TOLERANCE	制 图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM TOL	审 核 CHECK					
			X.X ±0.30	批 准 APPROVAL		产品名称 TITLE	2.0 单排 排母 圆直针	版 本 REV.	A
			X.XX ±0.20	比 例 SCALE					
1	初版发行		X.XXX ±0.10	投 影 Projection		产品料号 PART NO.	PM200-1-N-Z-3.0-XX-C	单 位 UNITS	mm
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	Angle ±3.0°			材 料 MATERIAL		页 次 SHEET	1/1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Headers & Wire Housings ***category:***

Click to view products by HCTL ***manufacturer:***

Other Similar products are found below :

57102-F02-18ULF 58102-G61-06LF 582553-1 009176003701906 01.001.5753.1 0050291907 02.125.8002.8 609-3404 61062-3 CSU011177004 622-0430 622-3653LF 63453-116 636-1030 636-1427 636-3427 636-4007 641938-9 644827-2 65495-038 65692-001LF 65781-018 65781-047 65817-010LF 65817-015LF 66207-023LF 67095-007LF 67601157 68631-112 68645-018 699319-000 M90C108951C 70.362.1628.0 70-4210 70-4226B 70-4853B 707-5028 71.350.2428.0 71961-016LF 733-134 733-162 754199-000 760-3052 80.063.4001.1 800-90-001-10-001000 800-90-010-10-002000 801-43-002-10-013000 801-43-006-10-002000 803-41-018-10-001000 803-43-024-10-001000