







SPECIFICATIONS

Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40℃ to +105℃

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230℃ for 30−60 seconds
(260℃ for 5 seconds)

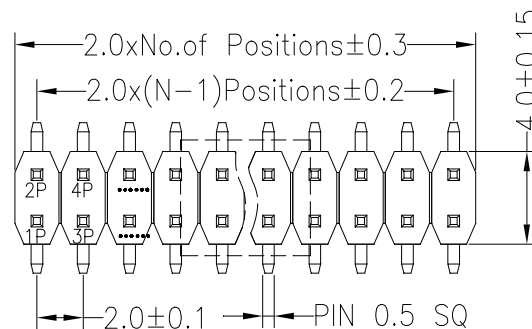

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

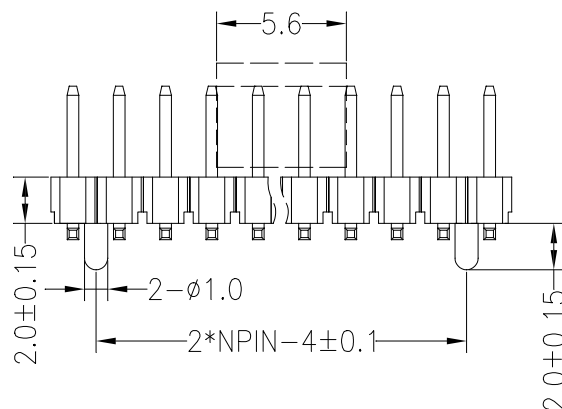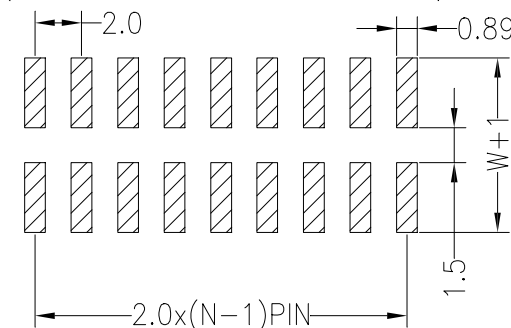

N= W/O Post

Dimension antitheses list				
ITEM	PA	PB	W	L
Standard	3.80	2.50	6.50	8.00
Alternate				

				OPERATION		DRAW	YiYuSheng	12.04.11	SCALE	FIT	深圳市华灿天禄电子有限公司	
				X.X	±0.30							
				X.XX	±0.20	CHECK			UNIT	mm	PART NO.	PZ200−2−N−S
				X.XXX	±0.10							
				Angle	±3°	APPROVE			SHEET	1/1	TITLE:	2.0PH 2xNpin H2.0MM SMT 夹持量
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL							

1 2 3 4 5 6 7 8 9

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) ***category:***

Click to view products by [HCTL](#) ***manufacturer:***

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [0009485154](#) [009176003701906](#) [0050291907](#) [00-9021-0611-00-339](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67016-026LF](#) [67095-007LF](#) [68631-112](#) [68645-018](#) [68648-049](#) [699319-000](#)
[70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [754199-000](#) [760-3052](#) [787-8014-00](#)
[FCN-367T-T012/H](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[803-41-018-10-001000](#)