
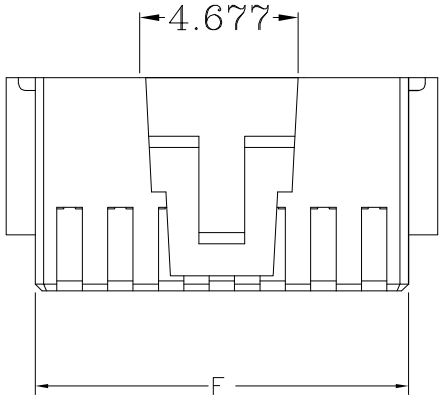
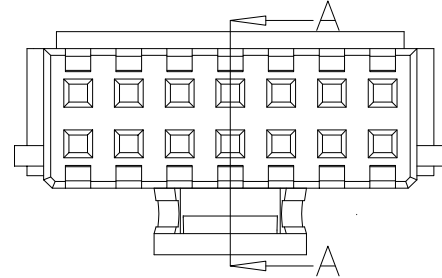
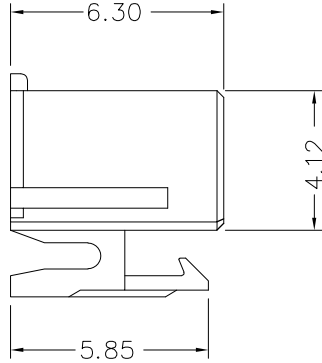


A - A

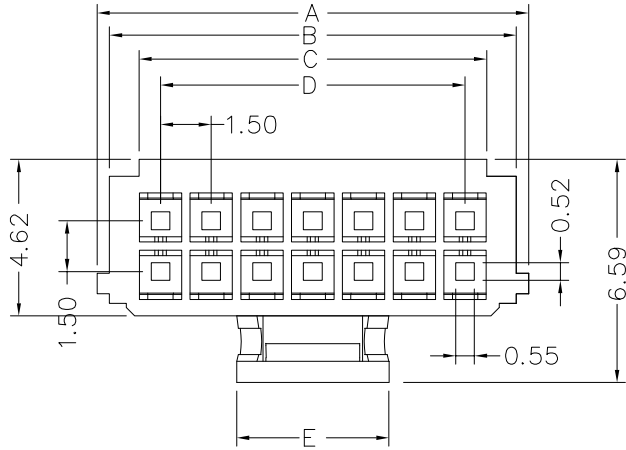

◆SPECIFICATIONS

- Current rating: 2.0A AC, DC
- Voltage rating: 250V AC,DC
- Temperature range: -25°C ~ +85 °C
- Insulation resistance: 500MΩ Min.
- Withstanding voltage: 500V AC/ minute.
- Contact resistance: 20mΩ Max.

Material:

Insulator: Nylon 46 UL 94V-0

Suitable: HDGC1508-T series Terminal,
HDGC1508HM-2xXP series Dual Row Housing
HDGC1508WVA-S-2xXP / WRA-S-2xXP series
Dual Row Wafer.

修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
AO		NEW DWG		2023-09-25

2x20P	31.50	31.52	29.77	28.50	10.50	30.52
2x19P	30.75	30.02	28.27	27.00	10.50	29.02
2x18P	29.25	28.52	26.77	25.50	10.50	27.52
2x17P	27.75	27.02	25.27	24.00	10.50	26.02
2x16P	26.25	25.52	23.77	22.50	10.50	24.52
2x15P	24.75	24.02	22.27	21.00	10.50	23.02
2x14P	23.25	22.52	20.77	19.50	10.50	21.52
2x13P	21.75	21.02	19.27	18.00	10.50	20.02
2x12P	20.25	19.52	17.77	16.50	10.50	18.52
2x11P	18.75	18.02	16.27	15.00	10.50	17.02
2x10P	17.25	16.52	14.77	13.50	10.50	15.52
2x9P	15.75	15.02	13.27	12.00	10.50	14.02
2x8P	14.25	13.52	11.77	10.50	4.50	12.52
2x7P	12.75	12.02	10.27	9.00	4.50	11.02
2x6P	11.25	10.52	8.77	7.50	4.50	9.52
2x5P	9.75	9.02	7.27	6.00	4.50	8.02
2x4P	8.25	7.52	5.77	4.50	4.50	6.52
2x3P	6.75	6.02	4.27	3.00	3.00	5.02
2x2P	5.25	4.52	2.77	1.50	2.50	3.52
Circuits Part NO.	A	B	C	D	E	F
Dimensions						




深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

电话: 0755-27129737 传真: 0755-29940187

-TOLERANCES-
UNLESS OTHERWISE SPECIFIED
公差参数表



TITLE:
产品名称: HDGC1.5带扣公壳

X.X ±0.15 X.X* ±3'

APPD:
核准: 谢亮

PART NO:
产品编号: HDGC1508HA-2xXP

X.XX ±0.05 X.XX* ±2'

CHECK:
校对: 王建业

DATE SCALE UNIT CODE NUMBER

X.XXX ±0.03 X.XXX* ±1'

DRAW:
绘图: 黄艳兰





2023-09-25 1:1 mm A001

修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
AO		NEW DWG		2023-09-25

◆SPECIFICATIONS

- Current rating: 2.0A AC, DC
- Voltage rating: 250V AC,DC
- Temperature range: -25°C ~ +85°C
- Insulation resistance: 500MΩ Min.
- Withstanding voltage: 500V AC/ minute.
- Contact resistance: 20m Ω Max.

Material: Phosphor Bronze
Finish: Tin plated
Suitable: HDGC1508HA-2xXP series Dual Row Housing
Q'TY/Reel: 25,000PCS

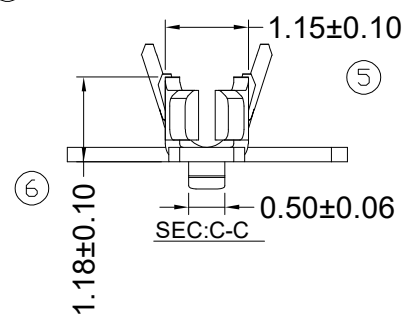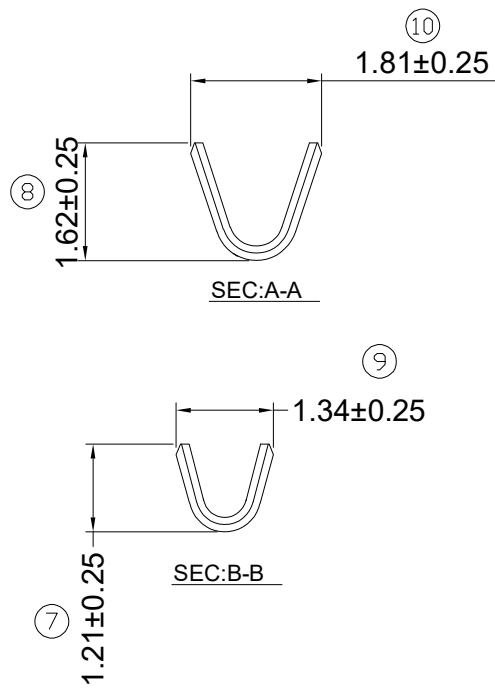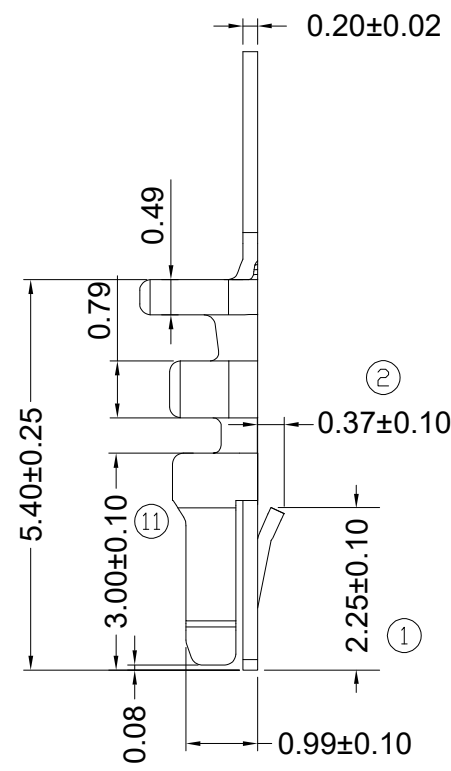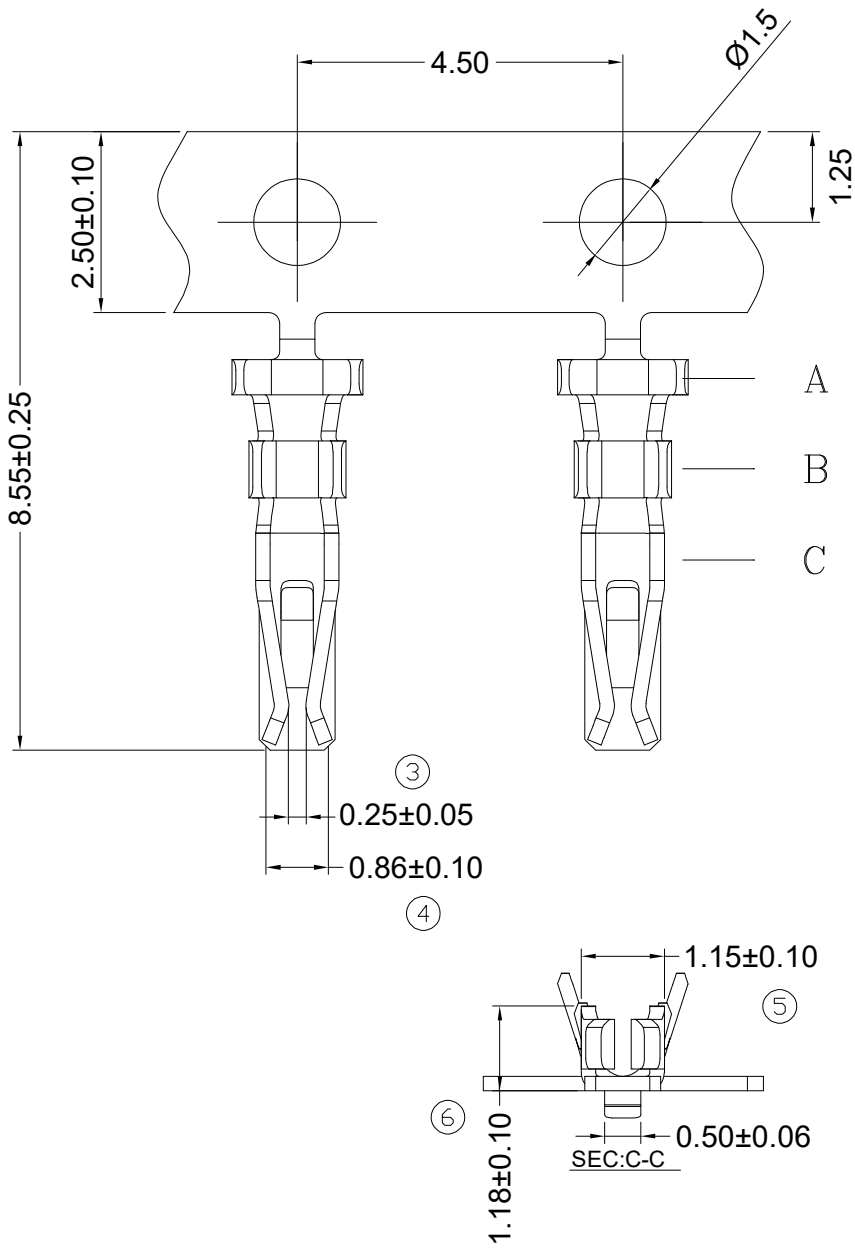

深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co.,LTD
电话: 0755-27129737 传真: 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				TITLE: 产品名称: HDGC1.5-T(母端)			
X.X ±0.15	X.X* ±3°	APPD: 核准: 谢亮		PART NO: 产品编号: HDGC1508-T			
X.XX ±0.05	X.XX* ±1°	CHECK: 校对: 王建业		DATE	SCALE	UNIT	CODE NUMBER
X.XXX ±0.03	X.XXX* ±0.5°	DRAW: 绘图: 黄艳兰		2023-09-25	1:1	mm	A001

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) *category:*

Click to view products by [HDGC](#) *manufacturer:*

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)