



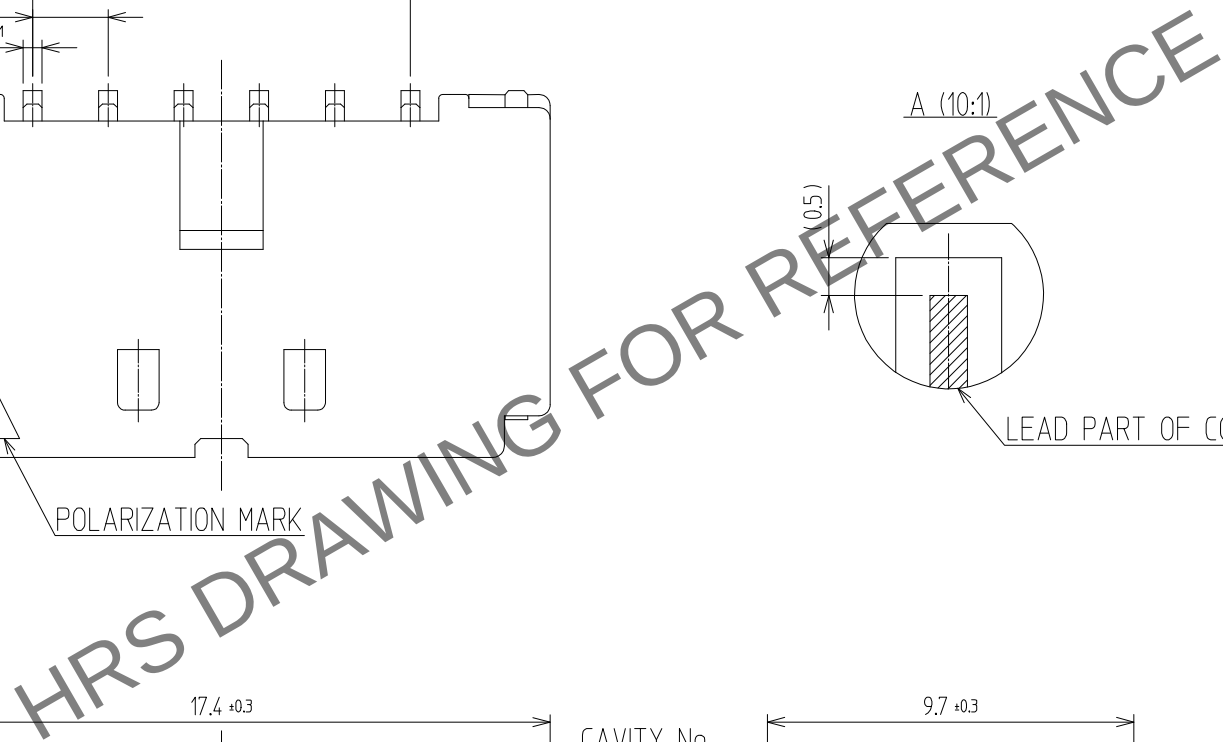

RECOMMENDED PCB LAYOUT(Top-View)

CONNECTOR MOUNTING SPACE A

CONTACT

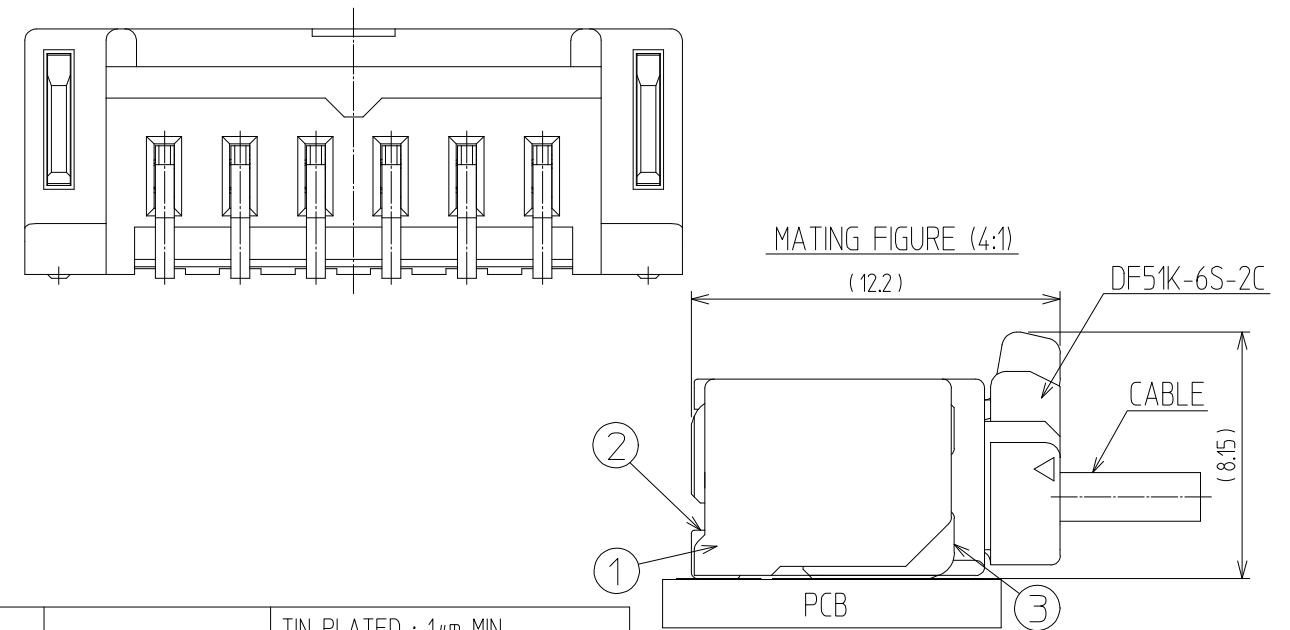


NOTE

1. SOLDERING TEMPERATURE : 250°C PEAK, 10sec MAX.
2. OPERATING TEMPERATURE : -55°~105°C
3. USED REFLOW SYSTEM : IN THE AIR OR NITROGEN
4. NO. OF CYCLES : 2 MAX
5. MATING PART  
FEMALE : DF51K-6S-2C
6. CO-PLANARITY : 0.12 MAX.
7. RECOMMENDED PCB THICKNESS IS 1.6mm.
8. RECOMMENDED SOLDER THICKNESS IS 0.15mm
9. UL(File No. E132750) AUTHORIZATION ARTICLE.  
C-UL(File No. E132750) AUTHORIZATION ARTICLE.



May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window

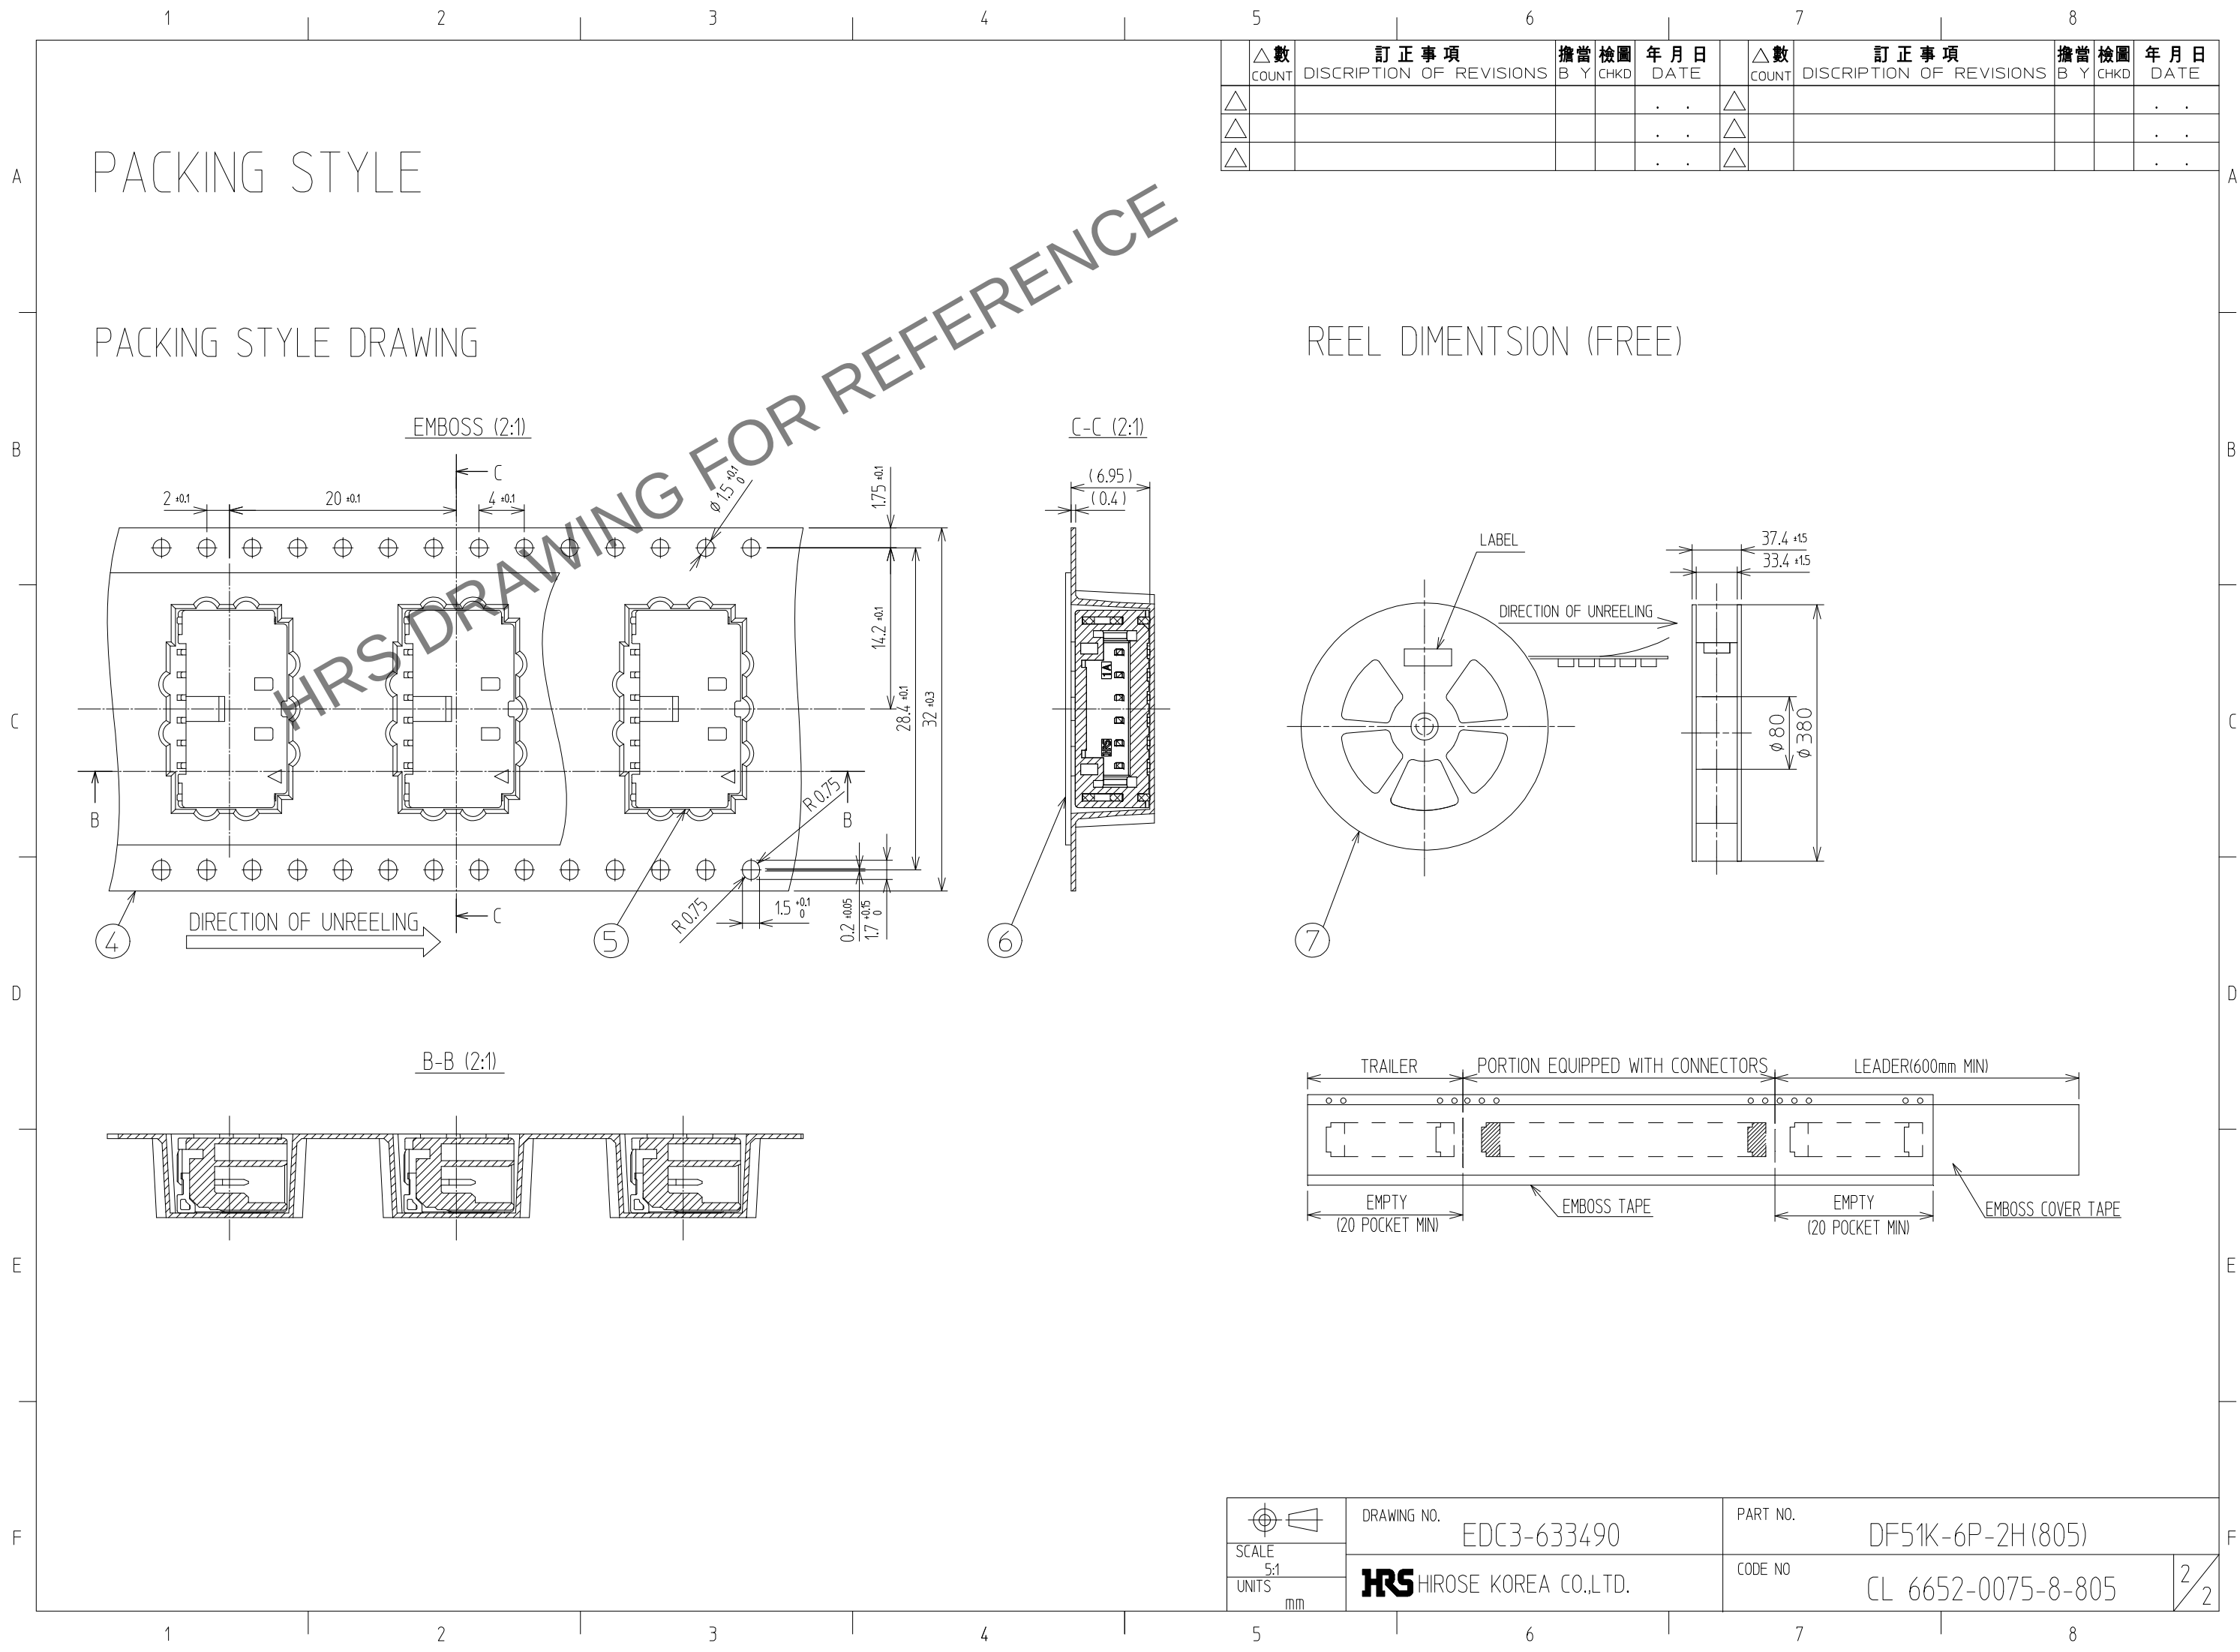

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for*** [Headers & Wire Housings](#) ***category:***

***Click to view products by*** [Hirose](#) ***manufacturer:***

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-](#)  
[18ULF](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#) [CSU011177004](#) [622-0430](#) [622-](#)  
[3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#) [65817-010LF](#)  
[65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)  
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)