



Sep.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

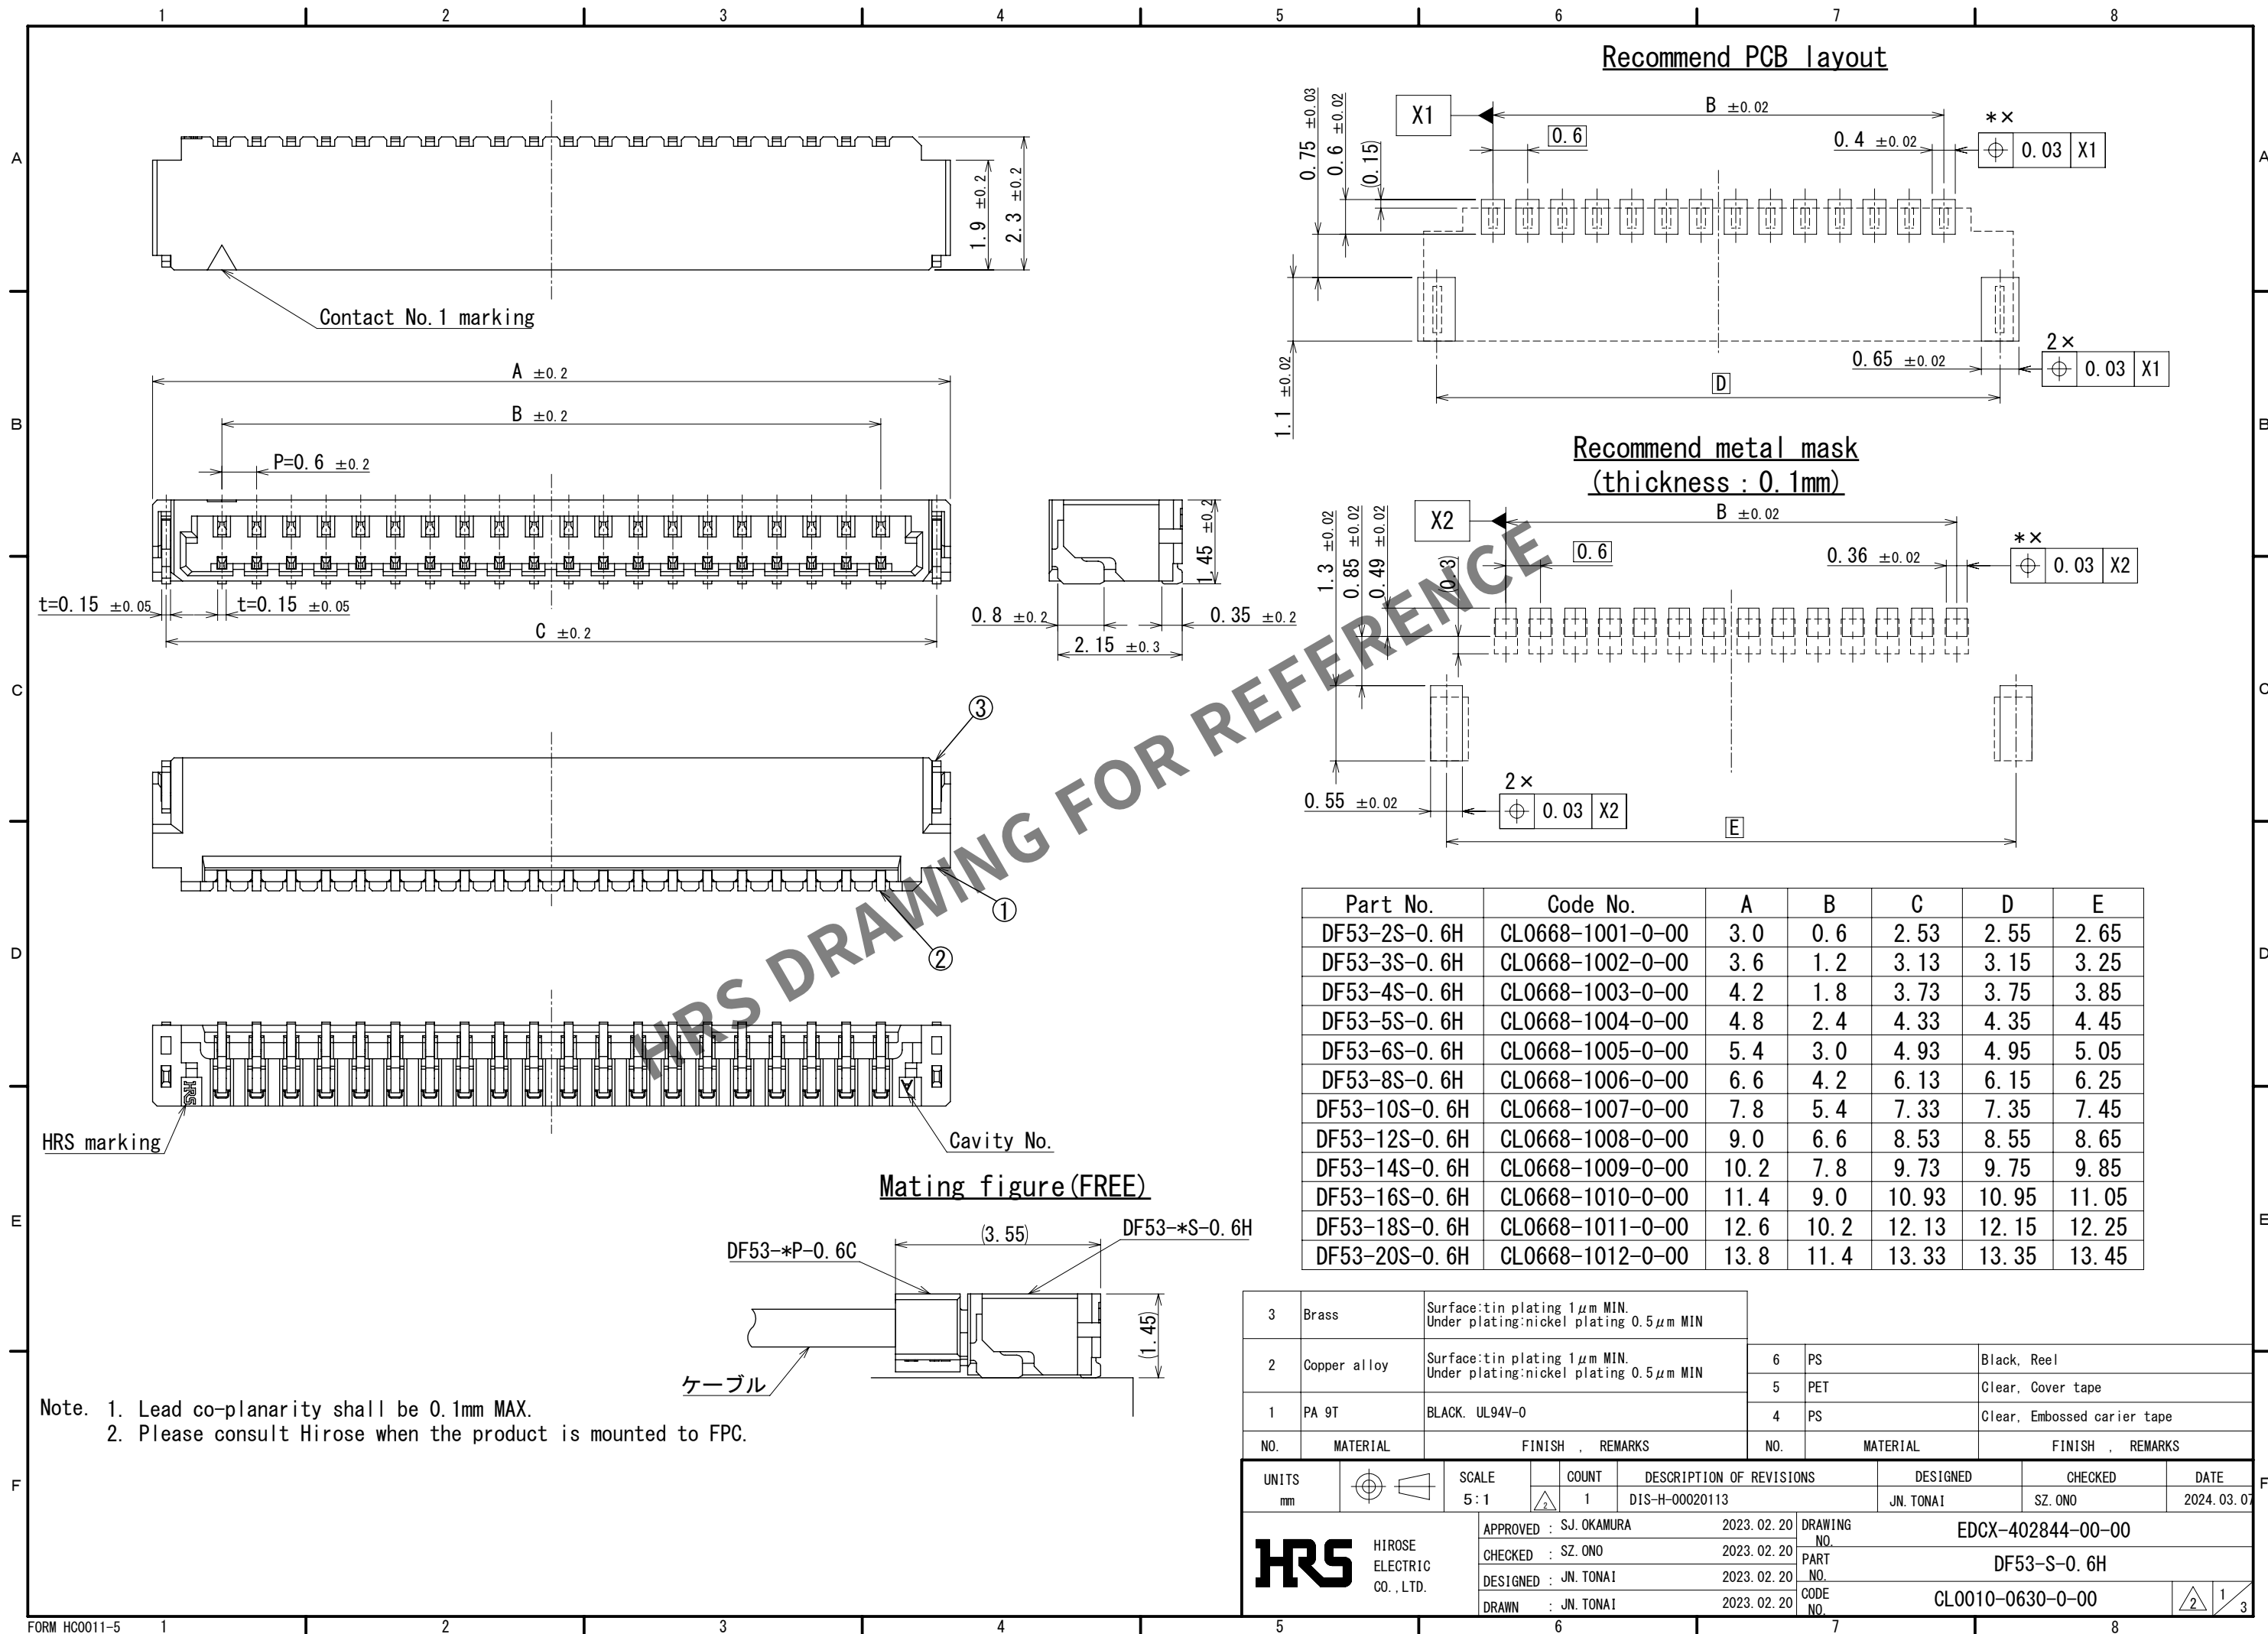


Sep.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

Drawing for packing(FREE)

Number of conductor:2, 3, 4, 5, 10, 12, 16, 18, 20

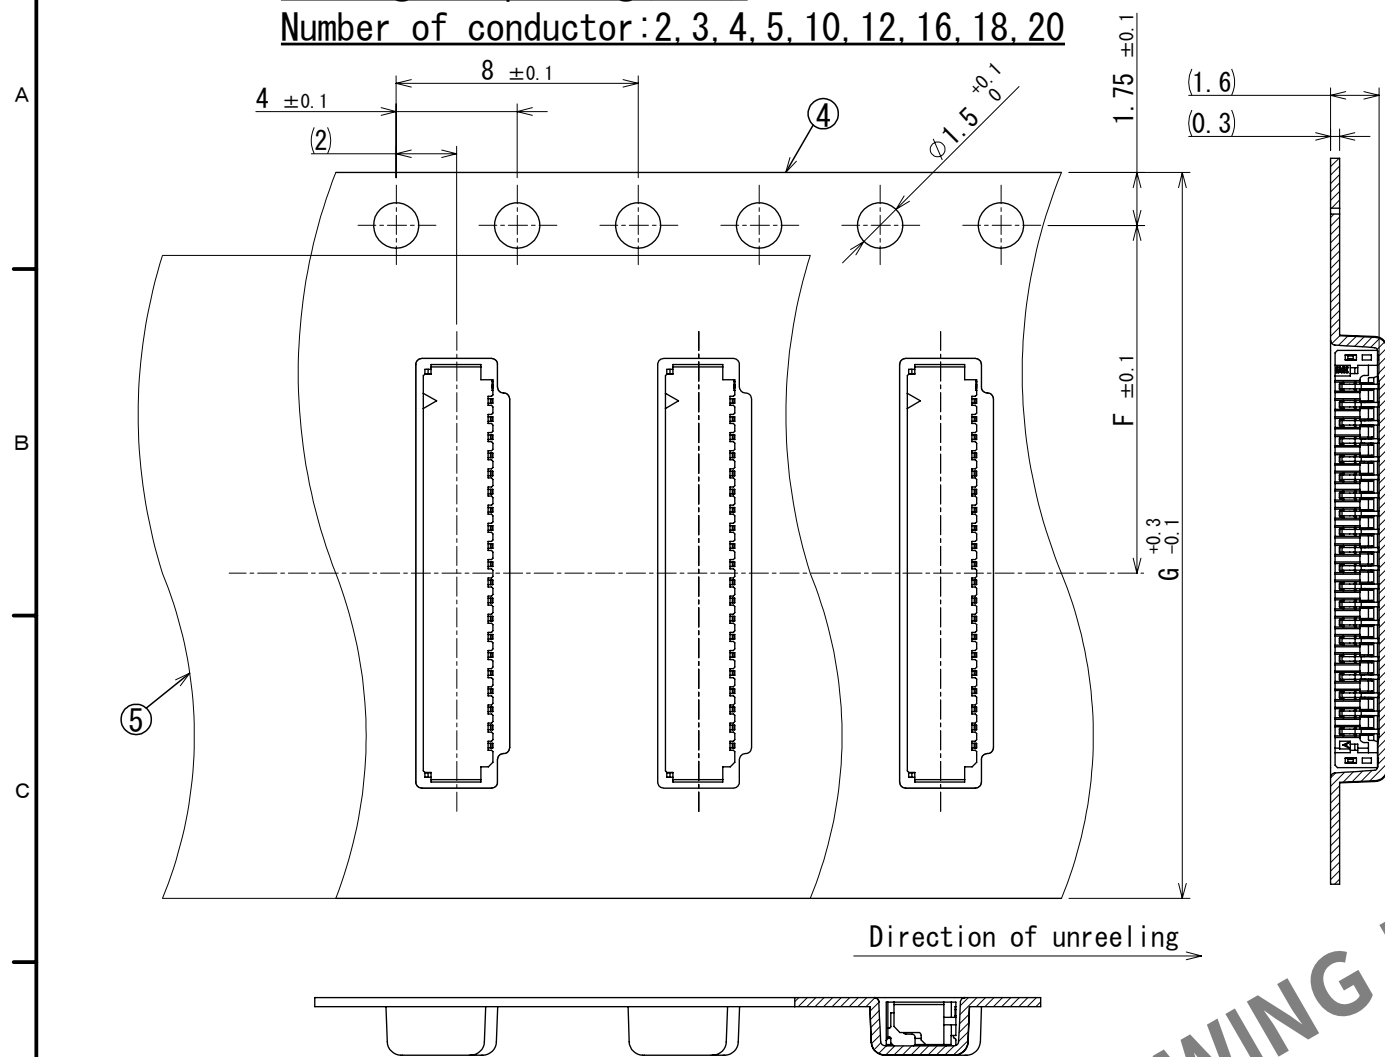


Style and dimension of reel (FREE)

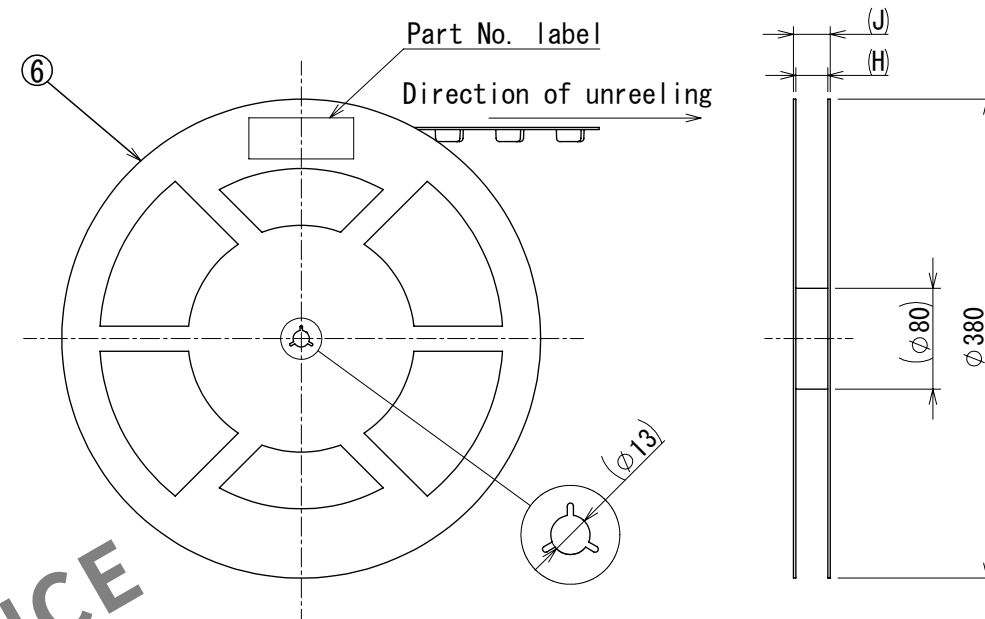


Part No.	Code No.	F	G	H	J
DF53-2S-0.6H	CL0668-1001-0-00	7.5	16	17.4	21.4
DF53-3S-0.6H	CL0668-1002-0-00	7.5	16	17.4	21.4
DF53-4S-0.6H	CL0668-1003-0-00	7.5	16	17.4	21.4
DF53-5S-0.6H	CL0668-1004-0-00	7.5	16	17.4	21.4
DF53-10S-0.6H	CL0668-1007-0-00	11.5	24	25.4	29.4
DF53-12S-0.6H	CL0668-1008-0-00	11.5	24	25.4	29.4
DF53-16S-0.6H	CL0668-1010-0-00	11.5	24	25.4	29.4
DF53-18S-0.6H	CL0668-1011-0-00	11.5	24	25.4	29.4
DF53-20S-0.6H	CL0668-1012-0-00	11.5	24	25.4	29.4

5 Taping(FREE)

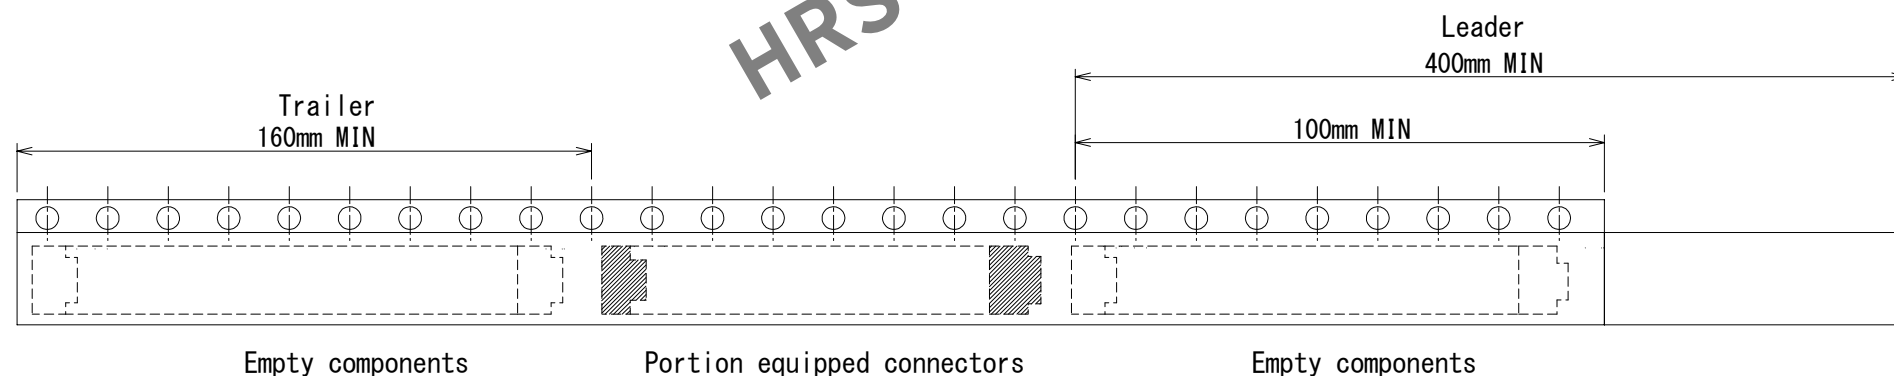

Reflow temperature profile in resistance to solderring heat

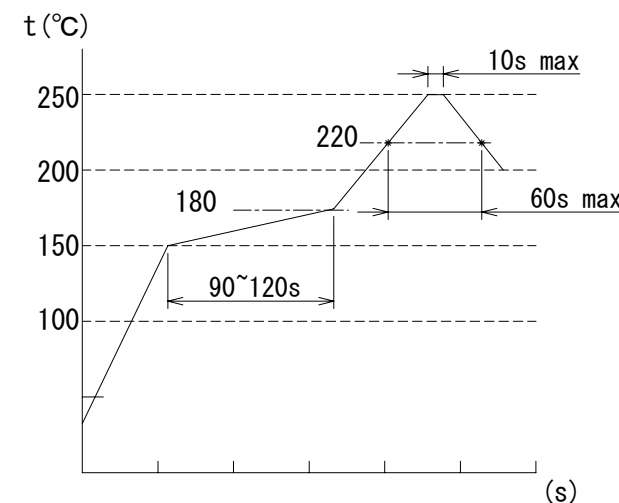


Number of reflow cycles 2 cycles MAX.


- Note
- 1 reel:5,000 connectors.
 - () is reference dimension.
 - Refer to IEC 60286-3 and JIS C 0806-3. (Packaging of components for automated handling)
 - This product satisfies halogen free requirements defined as 900 ppm maximum chlorine, 900 ppm maximum bromine, and 1500 ppm maximum total of chlorine and bromine.
 - Refer to the technical specification(ETAP-H1068) for packing type.
 - Please make sure refer to the manuals below for operation of this product.
For operation manual ETAD-H0996-00

HRS	DRAWING NO.	EDCX-402844-00-00
	PART NO.	DF53-S-0.6H
	CODE NO.	CL0010-0630-0-00

Drawing for packing(FREE)
Number of conductor:6,8,14

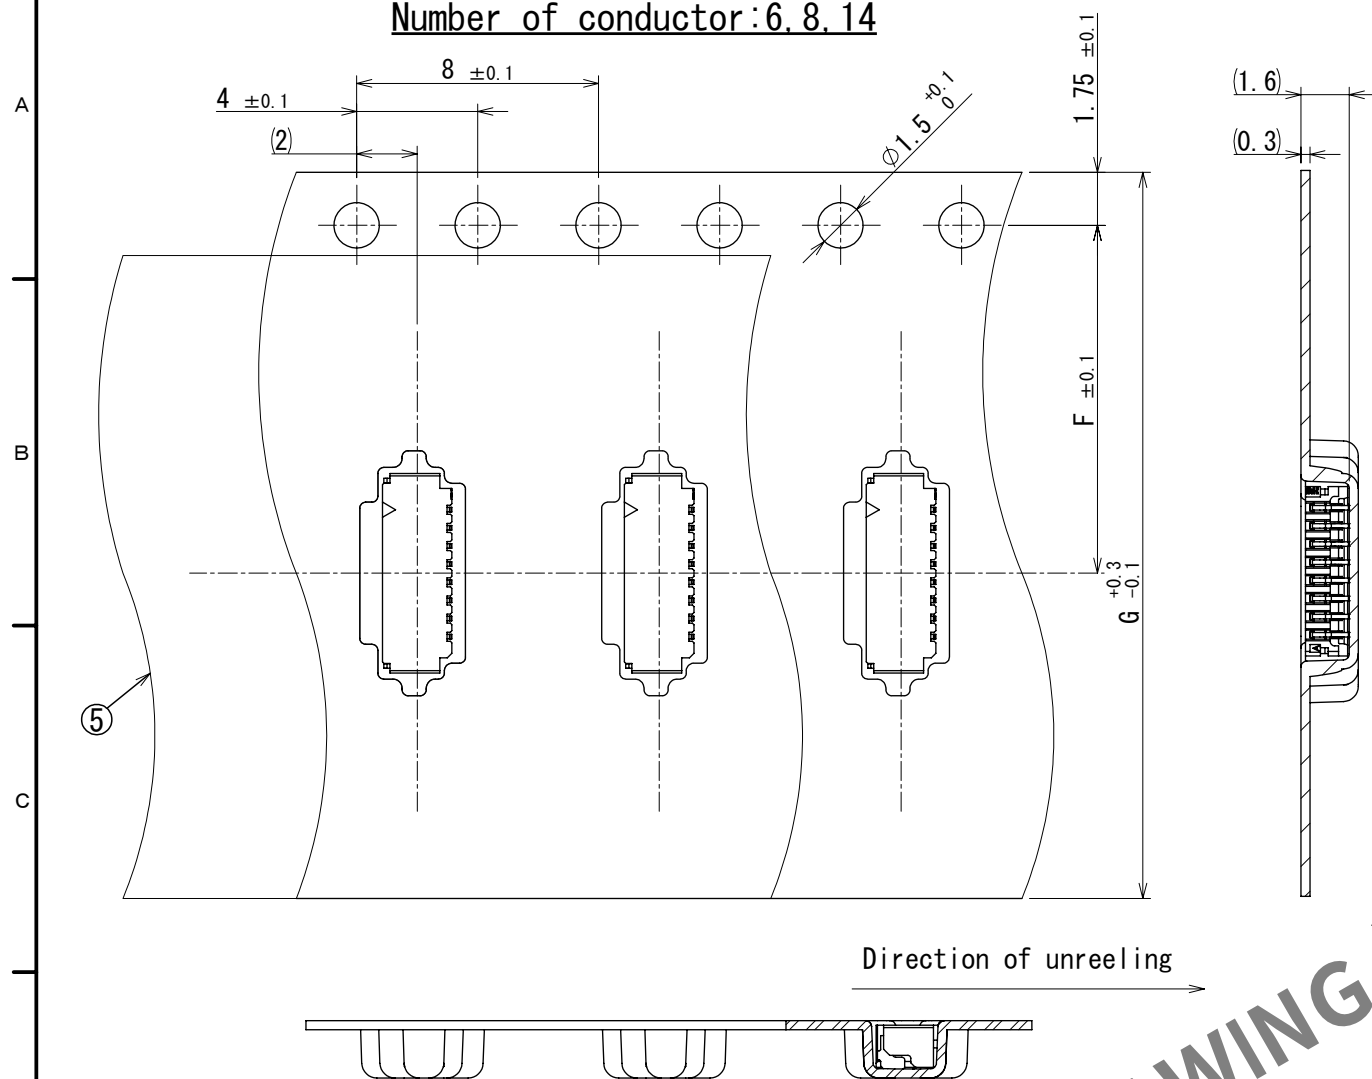


Style and dimension of reel (FREE)

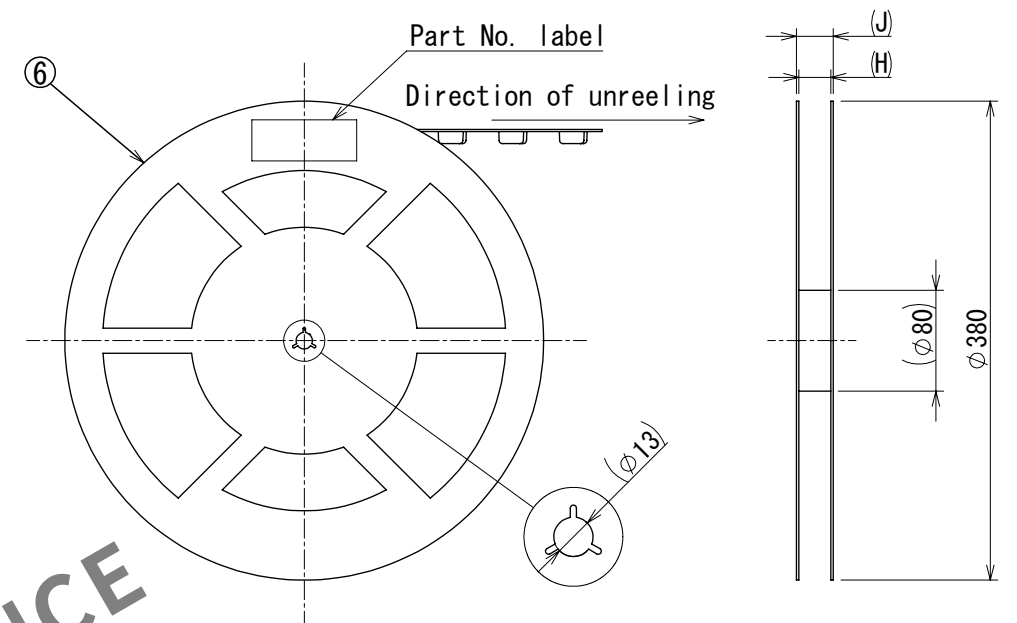


Part No.	Code No.	F	G	H	J
DF53-6S-0.6H	CL0668-1005-0-00	7.5	16	17.4	21.4
DF53-8S-0.6H	CL0668-1006-0-00	11.5	24	25.4	29.4
DF53-14S-0.6H	CL0668-1009-0-00	11.5	24	25.4	29.4

5 Taping (FREE)

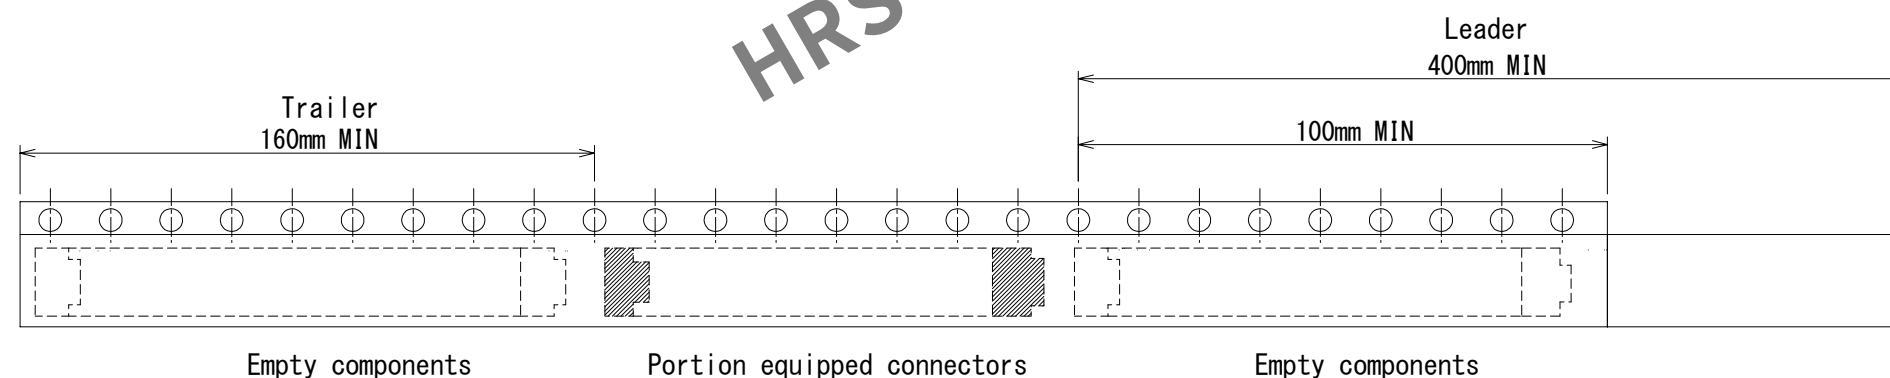

Reflow temperature profile in resistance to soldering heat

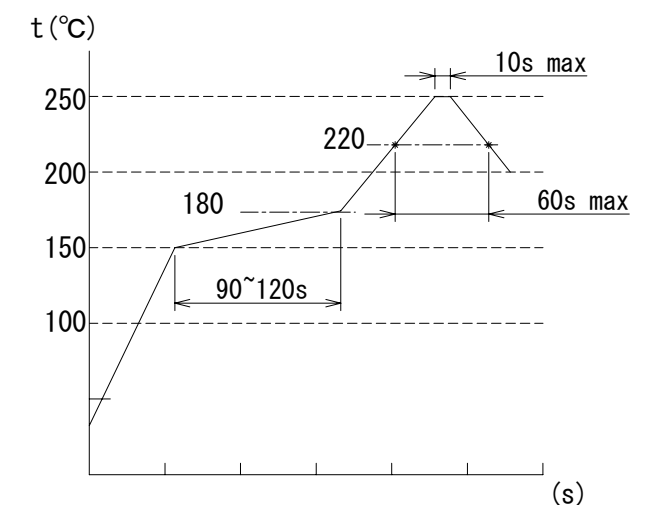

Number of reflow cycles 2 cycles MAX.

- Note
- 1 reel:5,000 connectors.
 - () is reference dimension.
 - Refer to IEC 60286-3 and JIS C 0806-3. (Packaging of components for automated handling)
 - This product satisfies halogen free requirements defined as 900 ppm maximum chlorine, 900 ppm maximum bromine, and 1500 ppm maximum total of chlorine and bromine.
 - Refer to the technical specification(ETAP-H1068) for packing type.
 - Please make sure refer to the manuals below for operation of this product.
For operation manual ETAD-H0996-00

HRS	DRAWING NO.	EDCX-402844-00-00
	PART NO.	DF53-S-0.6H
	CODE NO.	CL0010-0630-0-00
	NO.	3

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) ***category:***

Click to view products by [Hirose](#) ***manufacturer:***

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#) [CSU011177004](#) [622-0430](#) [636-1030](#) [641938-9](#) [65692-001LF](#) [65781-018](#) [65781-047](#) [65817-010LF](#) [67095-007LF](#) [67601157](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [819-22-004-30-001101](#) [MMS10801TSV](#) [850-10-006-10-001000](#) [851-87-009-30-136101](#) [852-10-016-10-001000](#) [852-10-026-10-001000](#) [856-10-002-40-001000](#) [PH2-08-SGA](#) [90309-116LF](#) [90309-118LF](#) [90309-912LF](#) [93.016.0053.1](#)