


Plugs

VSB 20

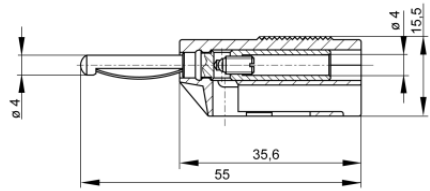

Product	VSB 20
description	Fully mating connector with cable gland and 4 mm socket for onward connection capability. Screw connection up to maximum cable cross-section of 2.5 mm ² and external diameter of 4 mm. Nickel-plated brass contact material.
operating instruction	BA411
article-no. / *colour	9304351xx  00 black  01 red  02 blue  03 yellow  04 green  06 gray  07 white Ni
drawing	
	
technical data	
connection	screw terminal
rated voltage	30 VAC / 60 VDC
rated current (consider derating curve)	30 A
material plug	brass, nickel plated
housing material	PP
temperature range acc. To IEC61010 ⁽¹⁾	-25 °C to +70 °C
flammability class acc. to UL 94 (only valid for basic material of housing)	HB

⁽¹⁾ contact the manufacturer for applications at deviating temperature ranges
stand: 01.06.2023

stand: 01.06.2023

4 mm system

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Plugs & Test Jacks](#) category:

Click to view products by [Hirschmann](#) manufacturer:

Other Similar products are found below :

[R644543000](#) [R948161000](#) [1659567](#) [1663921](#) [1696-102](#) [174-R825B-EX](#) [1905509](#) [211-101](#) [RS100GBL](#) [1909861](#) [1918007](#) [1933440](#) [2079](#)
[R644543002](#) [R644543003](#) [R644543004](#) [R644543020](#) [R644543021](#) [R948160000](#) [3502-103](#) [105-1106-001](#) [5278](#) [R948141029](#) [975090700](#)
[975090701](#) [930729103](#) [923690-20-R](#) [923739-14-I](#) [PP250GBL](#) [PP250GY](#) [2541996](#) [930109100](#) [972355106](#) [930099101](#) [934100100](#)
[934100101](#) [975454701](#) [934100700](#) [934100701](#) [930061102](#) [930166102](#) [934100102](#) [R941360000](#) [R921820070](#) [CL1557-TP/2](#) [PKI 10 A BL](#)
[7014](#) [930176109](#) [CT2150-150-5](#) [CT2150-150-0](#)