


Measuring leads

MAL S GG-B 100/2,5

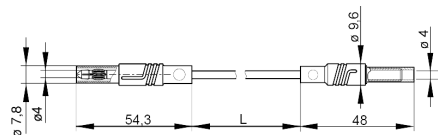

Product	MAL S GG-B 100/2,5
description	Safety adapter test lead according to IEC 61010 with 4 mm safety plug straight outlet and 4 mm safety socket on the other end. Highly flexible, double insulated stranded lead, shatter-proof grip sleeve. Built in color indicator for easy identification of insulation damages.
operating instruction	BA453
article-no. / *colour	9340461xx  00 black 01 red 02 blue 03 yellow 04 green 05 brown 06 gray 07 white 09 violet 88 yellow green Ni
drawing	
	
technical data	
rated voltage	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT III
rated current (consider derating curve)	32 A
material plug	brass, nickel plated
material socket	brass, nickel plated
housing material	PA
temperature range acc. To IEC61010 ⁽¹⁾	-15 °C to +70 °C
flammability class acc. to UL 94 (only valid for basic material of housing)	V-2
cable length	100 cm
conductor size	2,5 mm ²
cable material	PVC

4 mm safety system

⁽¹⁾ contact the manufacturer for applications at deviating temperature ranges
stand: 13.06.2022

stand: 13.06.2022

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Leads](#) category:

Click to view products by [Hirschmann](#) manufacturer:

Other Similar products are found below :

[BU-1149-A-36-0](#) [1894428](#) [1894690](#) [1895114](#) [1895263](#) [1927617](#) [911847](#) [911854](#) [1888570](#) [1888581](#) [1894629](#) [1894916](#) [1894978](#) [1895603](#)
[1895671](#) [CT3158-100](#) [1894846](#) [1895667](#) [1941141](#) [934060100](#) [BU-3030-M-24-9](#) [BU-3030-M-24-6](#) [BU-3030-M-24-4](#) [R948151002](#)
[R948320600](#) [R948151029](#) [R948150029](#) [JP-7505-83-24-2](#) [532-1](#) [532-3](#) [518-6](#) [518-5](#) [763-6](#) [499-1](#) [774-5](#) [833-1](#) [MLN SIL 200/1 BL](#) [480310](#)
[934062100](#) [CT2799A-2-100](#) [CT2162-200-6](#) [CT2162-100-5](#) [CT3264](#) [934060101](#) [R999251000](#) [R948131029](#) [R948161029](#) [R948160029](#)
[R948153000](#) [R948150002](#)