



Sockets

SEB 2620 F6,3

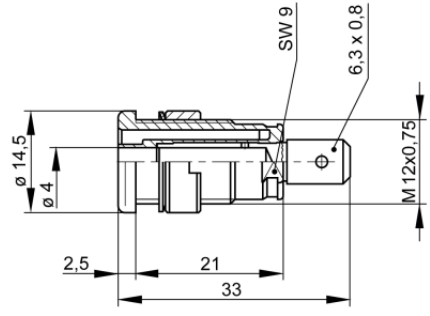

Product	SEB 2620 F6,3
description	Safety built-in socket, 4 mm diameter, contact-protected, with 6.3 x 0.8 tab connector complying with DIN 46 244, gold-plated brass. For installation into switchpanels and equipment chassis with wall thicknesses up to 6 mm. Installation hole: 12.2 mm diameter, Tightening torque: 50 Ncm, Accessory: assembly tool MW SEB
operating instruction	BA451
article-no. / *colour	9723561xx  00 black 01 red 02 blue 03 yellow 04 green 05 brown 06 gray 07 white 09 violet 88 yellow green 
drawing	
	
technical data	
connection	flat connector 6.3 x 0.8 mm
rated voltage	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT III
rated current (consider derating curve)	32 A
material socket	brass, gold plated
housing material	PA

4 mm safety system

temperature range acc. To IEC61010 ⁽¹⁾	-40 °C to +80 °C
flammability class acc. to UL 94 (only valid for basic material of housing)	V-2
UL	cURus E537895

⁽¹⁾ contact the manufacturer for applications at deviating temperature ranges
 stand: 22.08.2024

stand: 22.08.2024

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Plugs & Test Jacks](#) category:

Click to view products by [Hirschmann](#) manufacturer:

Other Similar products are found below :

[R644543000](#) [R948161000](#) [1659567](#) [1663921](#) [1696-102](#) [174-R825B-EX](#) [1905509](#) [211-101](#) [RS100GBL](#) [1909861](#) [1918007](#) [1933440](#) [2079](#)
[R644543002](#) [R644543003](#) [R644543004](#) [R644543020](#) [R644543021](#) [R948160000](#) [3502-103](#) [105-1106-001](#) [5278](#) [R948141029](#) [975090700](#)
[975090701](#) [930729103](#) [923690-20-R](#) [923739-14-I](#) [PP250GBL](#) [PP250GY](#) [2541996](#) [930109100](#) [972355106](#) [930099101](#) [934100100](#)
[934100101](#) [975454701](#) [934100700](#) [934100701](#) [930061102](#) [930166102](#) [934100102](#) [R941360000](#) [R921820070](#) [CL1557-TP/2](#) [PKI 10 A BL](#)
[7014](#) [930176109](#) [CT2150-150-5](#) [CT2150-150-0](#)