


Sockets

SAB 2600 G M4 Au

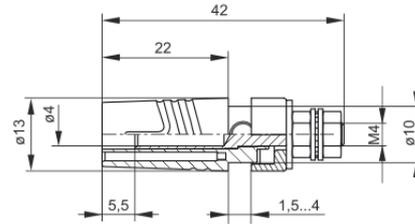

Product	SAB 2600 G M4 Au
description	Safety surface-mounted socket, 4 mm diameter, contact-protected, gold-plated brass with M4 thread. For installation into switch-panels and equipment-chassis of 1-4mm thickness. Connects with safety test leads.
operating instruction	BA456
article-no. / *colour	9723577xx  00 black 01 red 02 blue 03 yellow 04 green 05 brown 06 gray 07 white 09 violet <div style="text-align: right;">Au</div>
drawing	
technical data	
connection	M4 thread
rated voltage	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT II
rated current (consider derating curve)	32 A
material socket	brass, gold plated
housing material	PA
temperature range acc. To IEC61010 ⁽¹⁾	-25°C °C to +70 °C
flammability class acc. to UL 94 (only valid for basic material of housing)	V-2

4 mm safety system

⁽¹⁾ contact the manufacturer for applications at deviating temperature ranges
stand: 21.06.2022

stand: 21.06.2022

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Plugs & Test Jacks](#) category:

Click to view products by [Hirschmann](#) manufacturer:

Other Similar products are found below :

[R644543000](#) [R948161000](#) [1659559](#) [1659567](#) [1663921](#) [1663939](#) [1696-102](#) [174-R825B-EX](#) [1905509](#) [1905527](#) [211-101](#) [RS100GBL](#)
[RS250GBL](#) [251-102](#) [923743-28-I](#) [30-443G](#) [1909861](#) [1916466](#) [1918007](#) [1919515](#) [1929125](#) [1933440](#) [1938303](#) [1944375](#) [204-103](#) [2435108](#)
[2803-102](#) [30-442G](#) [R644543002](#) [R644543004](#) [R644543020](#) [R644543021](#) [R948160000](#) [3502-103](#) [430-102](#) [105-1106-001](#) [108](#) [108-1000-106](#)
[105-0306-001](#) [R948141029](#) [R644543024](#) [HSEB 3125 L AU/BL](#) [325-105](#) [923690-20-R](#) [923739-14-I](#) [5124](#) [PP250GBL](#) [PP250GY](#) [2541996](#)
[930109100](#)