



Sockets

SEB 2630 S1,9

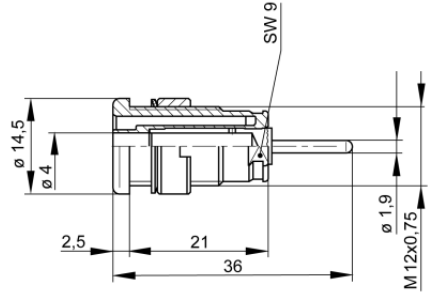

Product	SEB 2630 S1,9
description	Safety built-in socket, 4mm diameter, contact-protected, with 1.9mm soldering spike, gold-plated brass. For installation into switchpanels and equipment chassis with wall thicknesses up to 6mm. Soldering spike can be soldered into printed boards. Installation hole: 12.2 mm diameter. Accessory: assembly tool MW SEB Tightening torque: 50Ncm
operating instruction	BA451
article-no. / *colour	9723591xx  00 black  01 red  02 blue  03 yellow  04 green  05 brown  06 gray  07 white  09 violet  88 yellow green Au
drawing	
	
technical data	
connection	solder connection
rated voltage	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT III
rated current (consider derating curve)	24 A
material socket	brass, gold plated
housing material	PA
temperature range acc. To IEC61010 ⁽¹⁾	-40 °C to +80 °C

4 mm safety system

inflammability class acc. to UL 94 (only valid for basic material of housing)	V-2
UL	cURus E537895

⁽¹⁾ contact the manufacturer for applications at deviating temperature ranges
 stand: 22.08.2024

stand: 22.08.2024

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Plugs & Test Jacks](#) category:

Click to view products by [Hirschmann](#) manufacturer:

Other Similar products are found below :

[R644543000](#) [R948161000](#) [1659567](#) [1663921](#) [1696-102](#) [174-R825B-EX](#) [1905509](#) [211-101](#) [RS100GBL](#) [1909861](#) [1918007](#) [1933440](#) [2079](#)
[R644543002](#) [R644543003](#) [R644543004](#) [R644543020](#) [R644543021](#) [R948160000](#) [3502-103](#) [105-1106-001](#) [5278](#) [R948141029](#) [975090700](#)
[975090701](#) [930729103](#) [923690-20-R](#) [923739-14-I](#) [PP250GBL](#) [PP250GY](#) [2541996](#) [930109100](#) [972355106](#) [930099101](#) [934100100](#)
[934100101](#) [975454701](#) [934100700](#) [934100701](#) [930061102](#) [930166102](#) [934100102](#) [R941360000](#) [R921820070](#) [CL1557-TP/2](#) [PKI 10 A BL](#)
[7014](#) [930176109](#) [CT2150-150-5](#) [CT2150-150-0](#)