




Product: GDM3109-A0U-10F ☑


GDM Standard- 175301-803 (DIN 43650), Form A, 18mm, 3 Pole+Ground (Protective Earth), PG9, Black Housing, without circuitry, 250V | 16 A, Steel Center Screw, Bulk Packaging


## **Product Description**

GDM Standard- 175301-803 (DIN 43650), Form A, 18mm, 3 Pole+Ground (Protective Earth), PG9, Black Housing, without circuitry, 250V | 16 A, Steel Center Screw, Bulk Packaging


### **Technical Drawing**




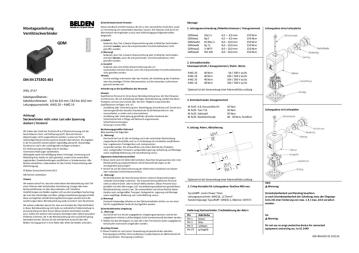







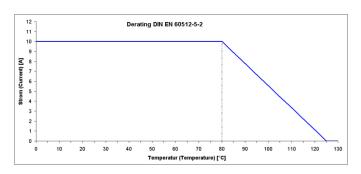

## **Technical Specifications**

## **Technical Data**

Product Family:	Valve Connectors			
•				
Product Sub Family:	GDM Standard			
Brand:	Hirschmann			
Connector Type:	Field Attachable			
Type of Contact / Gender:	Female			
Connector Design:	Angled			
Number of Pins:	3+PE (PE across cable outlet)			
Coding:	A			
Shielding:	Unshielded			
Attachment Type:	Central Screw			
Replacement for:	ID: 931969100 Name: GDM 3009 schwarz			
Rated Voltage:	250 V			
Rated Impulse Voltage:	4.0 kV			
Operating Voltage:	230 V AC/DC			
Rated Current*:	16 A			
Contact Resistance:	≤ 10 mOhm			
Insulation Resistance:	> 10^9 Ohm			
Mating Cycles:	≤ 50			
Type of Connection:	Screw			
Cable Gland:	PG9			
Conductor Cross Section:	0.25 - 1.5 mm <sup>2</sup>			
Suitable Cables:	Ø 4.5 - 10 mm			
Ambient Temperature (Operation)*:	-40°C to +125°C			
Protection Degree / IP Rating**:	IP65			
Design Standard:	DIN EN 175301-803-A, ISO 4400			
Pollution Degree:	3 acc. to DIN EN 60664-1 (VDE 0110-1)			
Clearance / Creepage Distance:	DIN EN 60664-1 (2008/01); VDE 0110-1			
Overvoltage Category:	III acc. to DIN EN 60664-1 (VDE 0110-1)			

## **Materials**

Contact Base Material:	CuZn	
Contact Plating:	Cu/Sn	
Contact Bearer Material:	PA GF	
Contact Bearer Color:	Black	
Flammability Class (Contact Bearer):	UL 94 HB	
Housing Material:	PA GF	
Housing Color:	Black	
Flammability Class (Housing):	UL 94 HB	
Cable Gland Material:	PA GF	
Cable Gland Gasket:	NBR	
Cable Gland Color:	Black	
Attachment Material:	Steel, Philips combi slot	
Gasket Material:	Sold separately	

#### **Additional Technical Data**

Fastening Torque (Contact Screw):	(40-50) Ncm for conductor size 0.5 - 1.5 mm²; (30-40) Ncm for conductor size 0.38-0.34 mm²; (25-30) Ncm for conductor size 0.25 mm²
Fastening Torque (Cable Gland):	(250-375) Ncm
Fastening Torque (Attachment):	(50-60) Ncm

#### **Approvals**

VDE:	Yes
SEV:	Yes

#### Safety & Environmental Compliance

RoHS Compliant:	Yes

#### Notes

Note Derating:	Notice derating	
Protection Degree / IP Rating Note:	te: ** only if mounted and locked in combination with Hirschmann / Lumberg Automation connector.	
Note: Do not connect or disconnect under load.		

#### Variants

Item #	Item Description	Central Screw	Gasket	Packaging	Replacement For
934888105	GDM3109-A0U-10F	1- SteelScrew, Combi Head	0 - Sold Seperately	F - Collect packaging 200 pieces, assembled	ID: 931969100 Name: GDM 3009 black

#### © 2024 Belden, Inc

#### All Rights Reserved

Although Belden makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described here in are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability.

Belden provides the information and specifications herein on an "ASIS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Belden be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Belden has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.

All sales of Belden products are subject to Belden's standard terms and conditions of sale.

Belden believes this product to be in compliance with all applicable environmental programs as listed in the data sheet. The information provided is correct to the best of Belden's knowledge, information and belief at the date of its publication. This information is designed only as a general guide for the safe handling, storage, and any other operation of the product itself or the one that it becomes a part of. The Product Disclosure is not to be considered a warranty or quality specification. Regulatory information is for guidance purposes only. Product users are responsible for determining the applicability of legislation and regulations based on their individual usage of the product.

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Circular DIN Connectors category:

Click to view products by Hirschmann manufacturer:

Other Similar products are found below:

75-190222-09G FRCIR030FP-36-10P-F80 FRCIR030R-36-7P-F80 FRCIR06F-20-15S-F80 FRCIR06R-20-27S 8R3006A18M0033 PT05A-14-5SX GTC01A-22-28P PT05A1832SW PT05A2041SX PT05E1419SW GTC030-20-27PW-LC GTC030A-20-33S GTC06R20-22P-025-LC 1210500311 1210503216 D38999/42FB35BN D38999/42FD05PN D38999/42FE35AN D38999/46WD35AN D38999/47WD35PB MS3100R20-22S MS3100R20-22SW MS3102R18-1PZ MS310314S-5P MS3114F10-6P MS3122E10-6PW MS3456W28-21PZ-LC C18213N21 CA06COME24-11PB CA06EW20-29PBF80 CA3100E14S-9PB CA3100E16S-8PBF80 CA3100E18-1SBF80A176 CA3100E20-7SB-F80-A176 CA3100E32-15PB CA3100E32-15SB CA3100E32-17PB CA3100F18-1SB CA3101E16S-1PBF42 CA3101E16S-5SB CA3101E18-12PBF80A176 CA3101E18-12SB CA3101E20-15SB CA3101E20-15SBA232 CA3101E20-16PB CA3101E20-19PB CA3101E20-2SB CA3101E20-33PB CA3101E20-4PB