


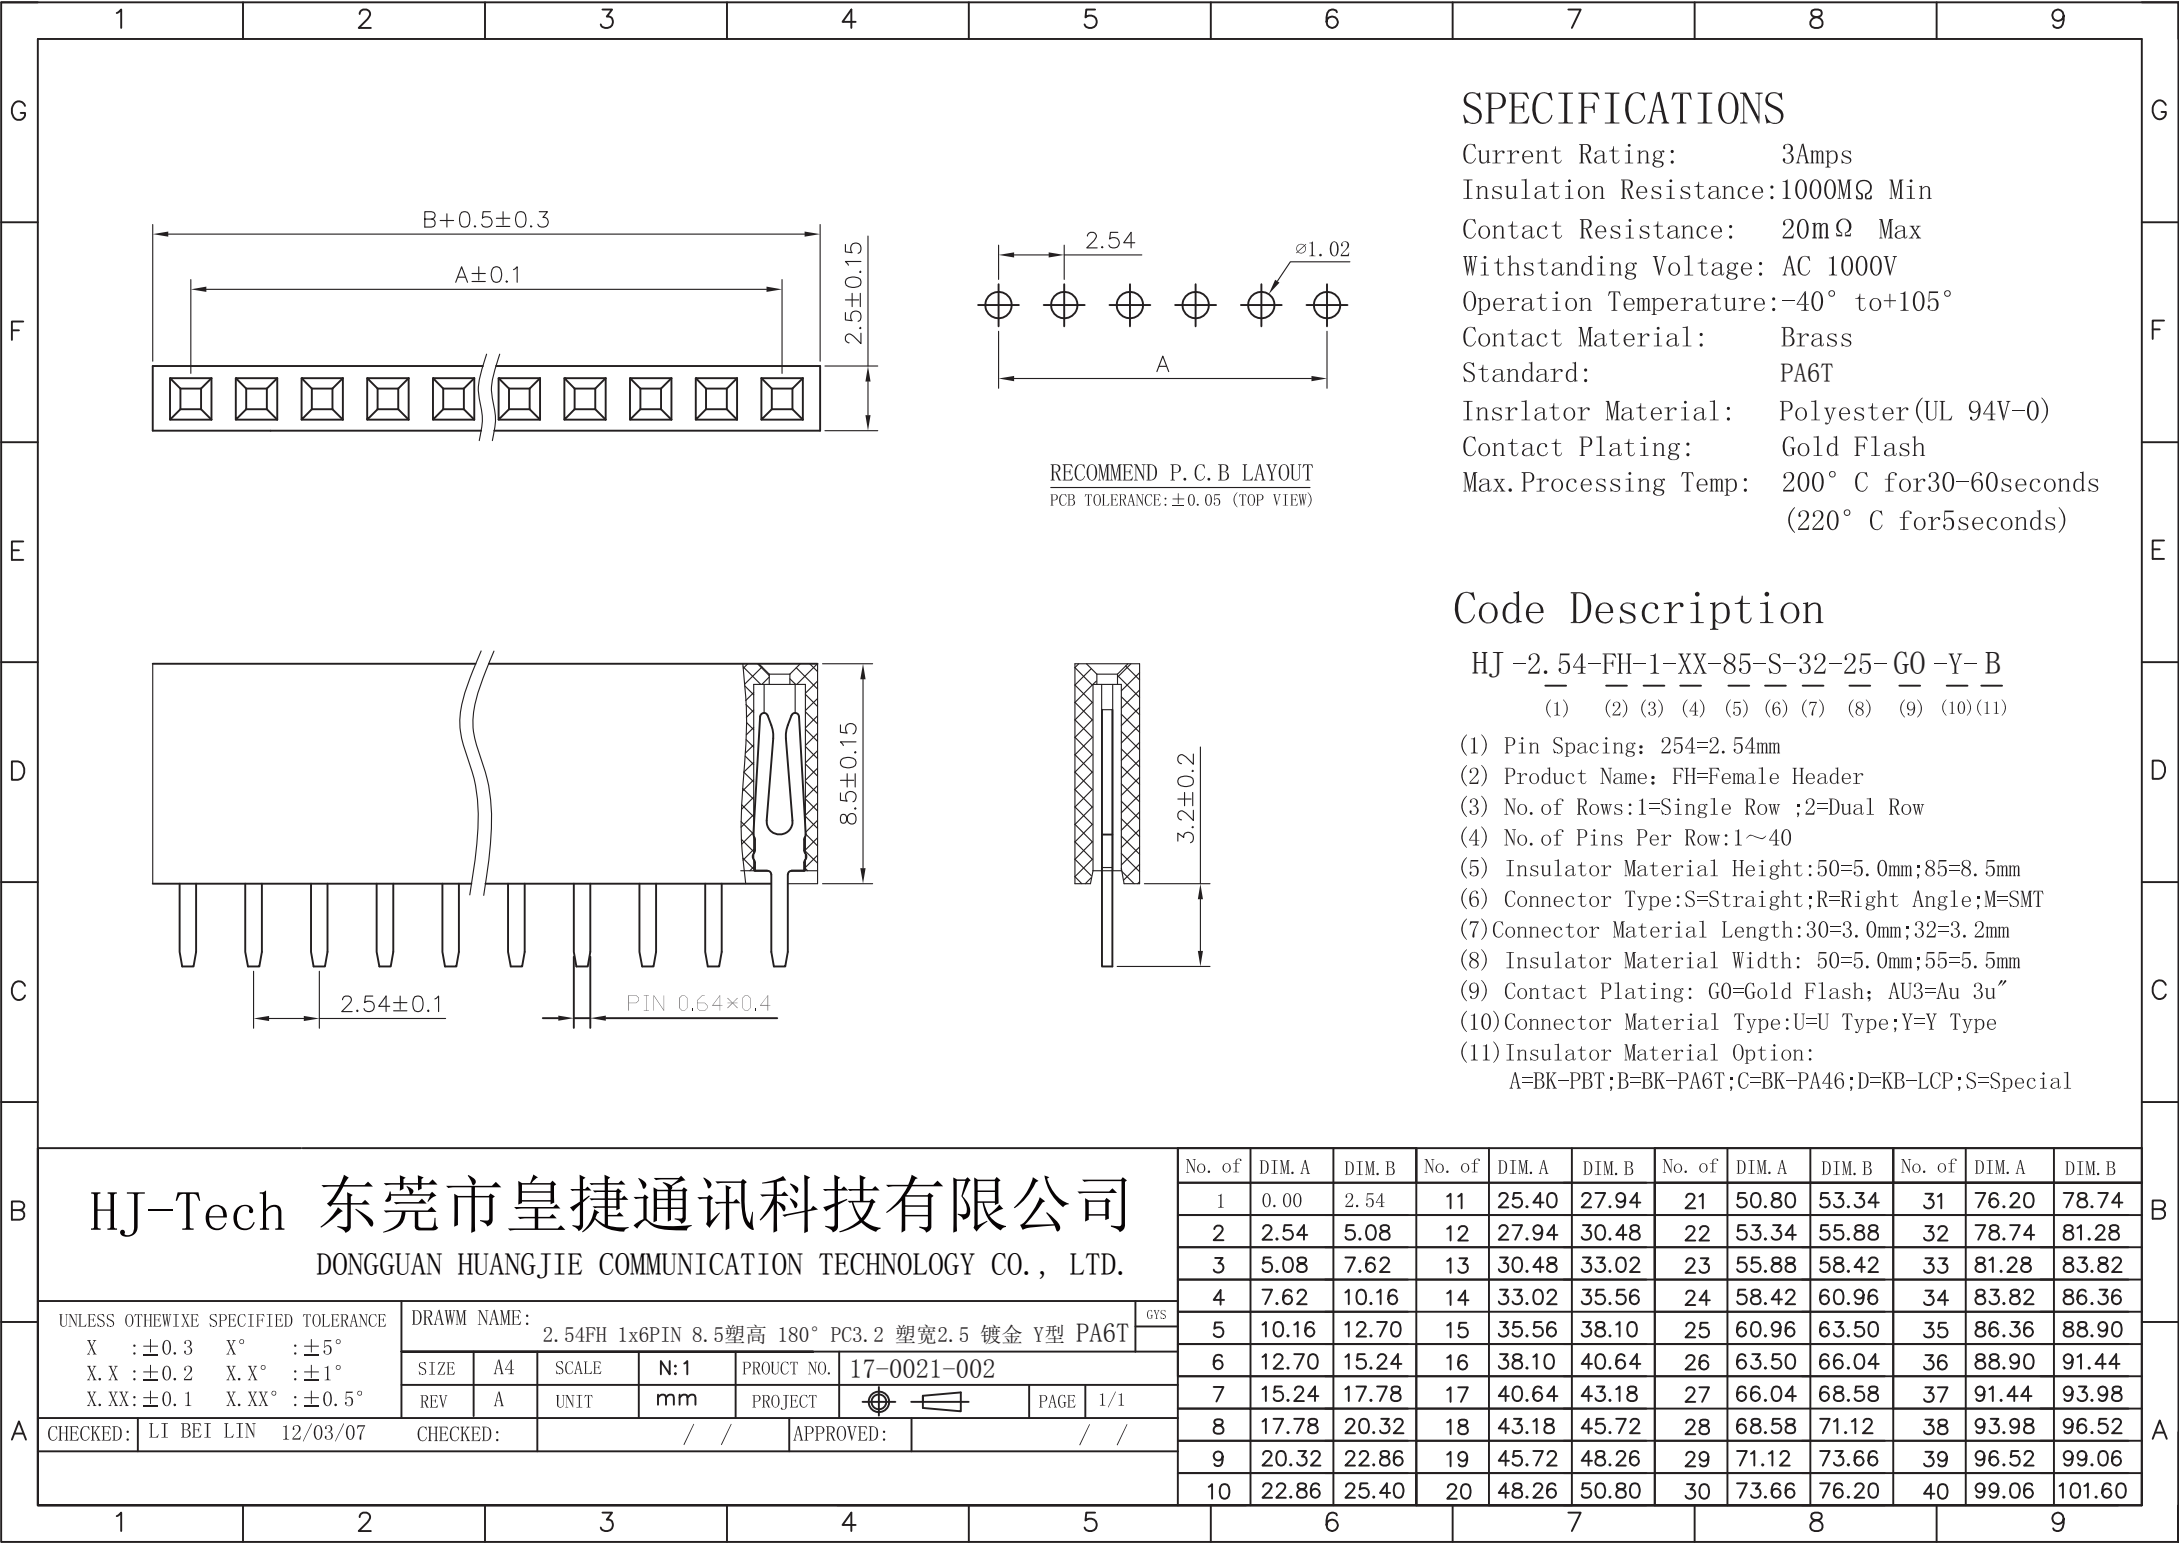

SPECIFICATIONS

Current Rating: 3Amps
Insulation Resistance:1000MΩ Min
Contact Resistance: 20mΩ Max
Withstanding Voltage: AC 1000V
Operation Temperature:-40° to+105°
Contact Material: Brass
Standard: PA6T
Insrlator Material: Polyester(UL 94V-0)
Contact Plating: Gold Flash
Max.Processing Temp: 200° C for30-60seconds
(220° C for5seconds)

Code Description

HJ -2.54-FH-1-XX-85-S-32-25-G0-Y-B

- (1) Pin Spacing: 254=2.54mm
(2) Product Name: FH=Female Header
(3) No. of Rows:1=Single Row ;2=Dual Row
(4) No. of Pins Per Row:1~40
(5) Insulator Material Height:50=5.0mm;85=8.5mm
(6) Connector Type:S=Straight;R=Right Angle;M=SMT
(7)Connector Material Length:30=3.0mm;32=3.2mm
(8) Insulator Material Width: 50=5.0mm;55=5.5mm
(9) Contact Plating: G0=Gold Flash; AU3=Au 3u"
(10)Connector Material Type:U=U Type;Y=Y Type
(11)Insulator Material Option:
A=BK-PBT;B=BK-PA6T;C=BK-PA46;D=KB-LCP;S=Special

HJ-Tech 东莞市皇捷通讯科技有限公司
DONGGUAN HUANGJIE COMMUNICATION TECHNOLOGY CO., LTD.

UNLESS OTHEWIXE SPECIFIED TOLERANCE X :±0.3 X° :±5° X.X :±0.2 X.X° :±1° X.XX:±0.1 X.XX° :±0.5°		DRAWN NAME: 2.54FH 1x6PIN 8.5塑高 180° PC3.2 塑宽2.5 镀金 Y型 PA6T					GYS	
		SIZE	A4	SCALE	N:1	PROUCT NO.	17-0021-002	
		REV	A	UNIT	mm	PROJECT	PAGE 1/1	

CHECKED:	LI BEI LIN	12/03/07	CHECKED:	/ /	APPROVED:	/ /
----------	------------	----------	----------	-----	-----------	-----

No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B
1	0.00	2.54	11	25.40	27.94	21	50.80	53.34	31	76.20	78.74
2	2.54	5.08	12	27.94	30.48	22	53.34	55.88	32	78.74	81.28
3	5.08	7.62	13	30.48	33.02	23	55.88	58.42	33	81.28	83.82
4	7.62	10.16	14	33.02	35.56	24	58.42	60.96	34	83.82	86.36
5	10.16	12.70	15	35.56	38.10	25	60.96	63.50	35	86.36	88.90
6	12.70	15.24	16	38.10	40.64	26	63.50	66.04	36	88.90	91.44
7	15.24	17.78	17	40.64	43.18	27	66.04	68.58	37	91.44	93.98
8	17.78	20.32	18	43.18	45.72	28	68.58	71.12	38	93.98	96.52
9	20.32	22.86	19	45.72	48.26	29	71.12	73.66	39	96.52	99.06
10	22.86	25.40	20	48.26	50.80	30	73.66	76.20	40	99.06	101.60

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) ***category:***

Click to view products by [HJ Tech](#) ***manufacturer:***

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [009176003701906](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#)
[65781-018](#) [65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#)
[M90C108951C](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-](#)
[3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#)
[803-43-024-10-001000](#)