



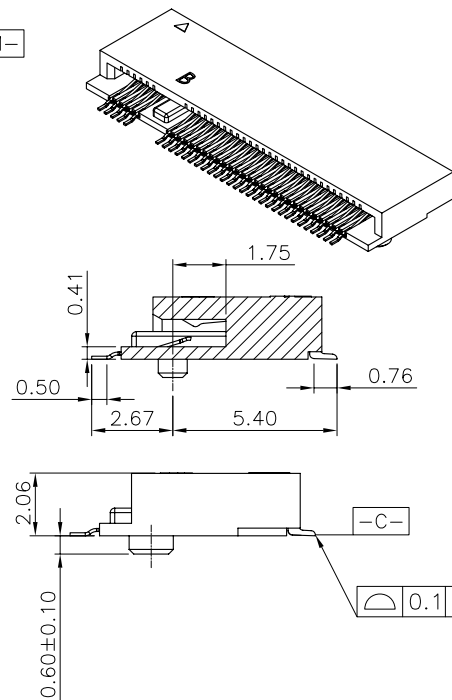

NOTES:


- MATERIAL SPECIFICATION:
1-1. HOUSING: LCP+40%GF, UL94V-0, COLOR: BLACK.
1-2. CONTACT: PHOSPHOR-COPPER.
- PLATING SPECIFICATION:
2-1. CONTACT:
50u" MIN. NICKEL UNDER PLATING OVER ALL.
GOLD PLATING ON CONTACT SEE TABLE1, AND SOLDER AREA IS TIN.
- HF COMPLIANT, ROHS COMPLIANT.
- DATE CODE: XXXXXX
DAY
WEEK
YEAR
- MECHANICAL PERFORMANCE:
5-1. DURABILITY: SEE TABLE
- ELECTRICAL PERFORMANCE:
6-1. CURRENT: 0.5A PER PIN.
6-2. LLCR: INITIAL 55mΩ MAX.; FINAL ΔLLCR=20mΩ MAX..
- IR REFLOW:
THE TEMPERATURE SHALL BE $260 \pm 5^\circ\text{C}$ MAINTAINING 10 ± 1 SECONDS.

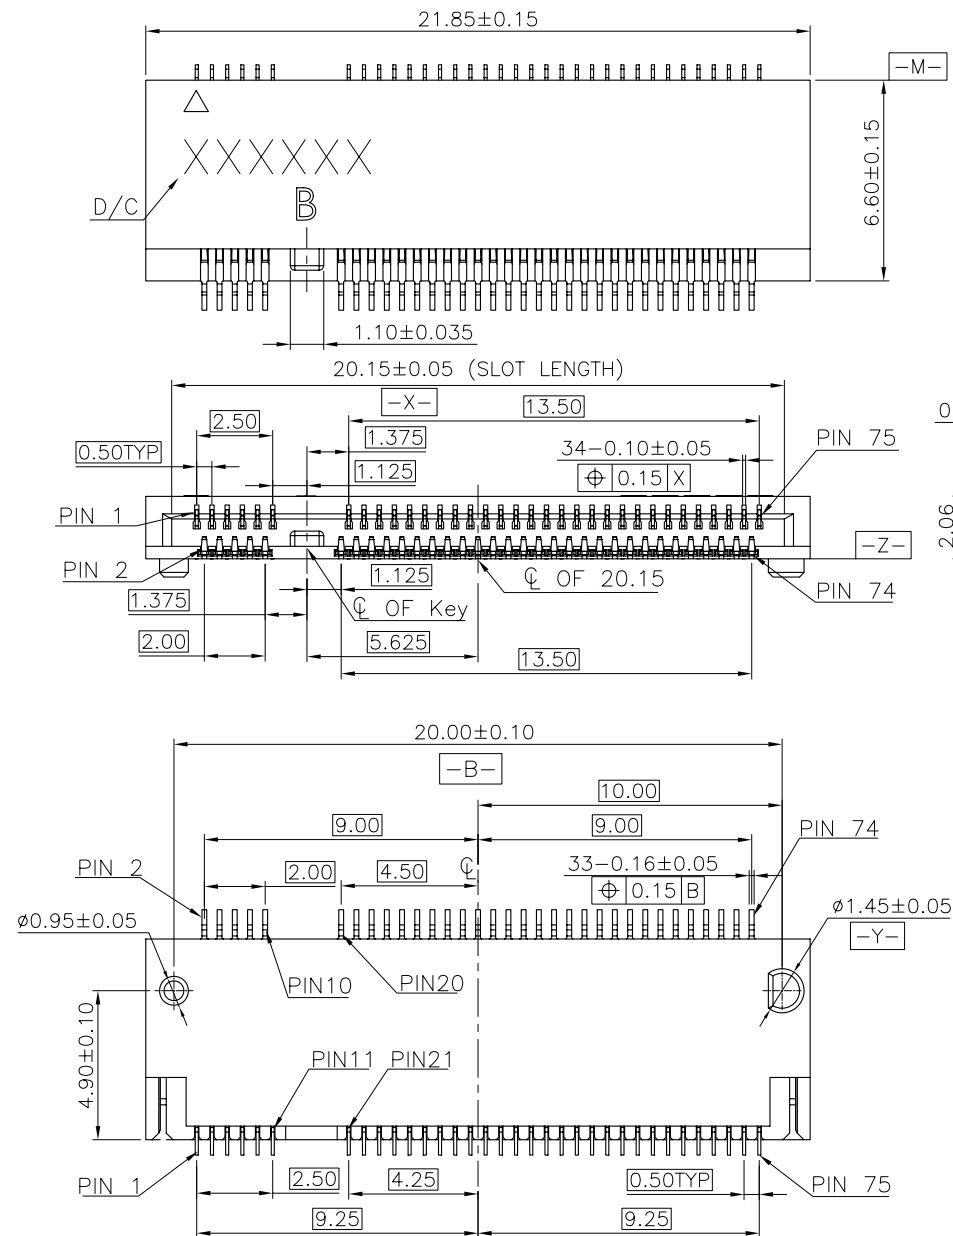

深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ± 0.30
X.XX ± 0.25
X.XXX ± 0.15
X.' $\pm 2'$ X.X' $\pm 0.5'$



UNIT: mm [inch]
SCALE: 1:1 SIZE: A4

DRAWN BY:

陈一鸣

DATE:

2014-02-23

PART NAME:

NGFF M.2 B KEY 2.3H 0.5PH

CHECKED BY:

马跃

DATE:

2014-02-23

PART NO.:

HYCW09B-05NGFF-230B

APPROVED BY:

邱敏

DATE:

2014-02-23


DRAW NO.:

HYC-1804191039


SHEET NO.:

1 OF 1


Assembly stack height schematic diagram

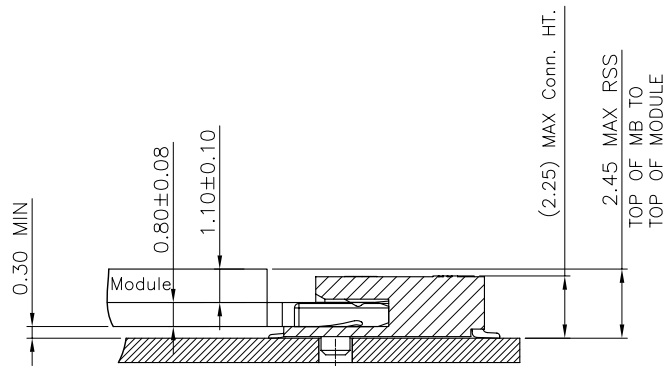


Stack-up Top Mount Single Sided Module for 1.20 max top-side component height

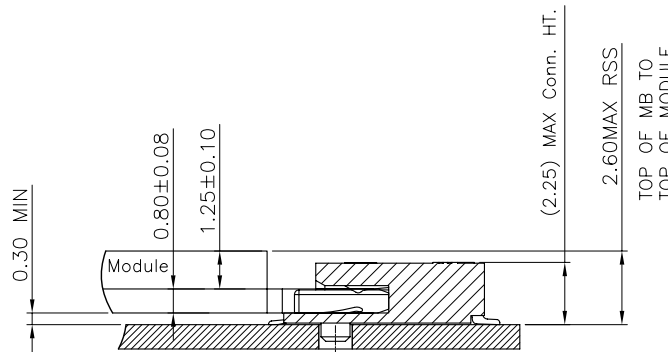

Stack-up Top Mount Single Sided Module for 1.35 max top-side component height

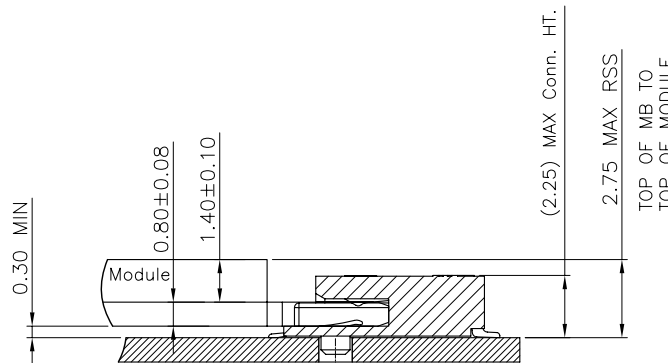

Stack-up Top Mount Single Sided Module for 1.5 max top-side component height

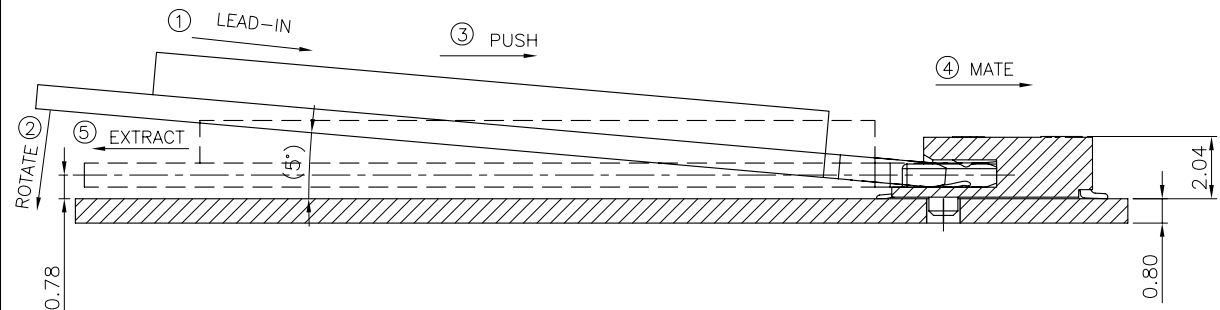

HOW TO MATE AND EXTRACT

MATE: ① → ④
EXTRACT: ⑤

NOTE: Mating force will generate from step 3 to step 4.



深圳市华宇创精密电子有限公司


TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X' ±2" X.X' ±0.5'



UNIT: mm [inch]

SCALE: 1:1

SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

CHECKED BY :

马跃

DATE :

2014-02-23

APPROVED BY :

邱敏

DATE :

2014-02-23

PART NAME:

NGFF M.2 B KEY 2.3H 0.5PH

PART NO.

HYCW09B-05NGFF-230B





MOLD NO.

DRAW NO:

HYC-1804191039

SHEET NO.





1 OF 1

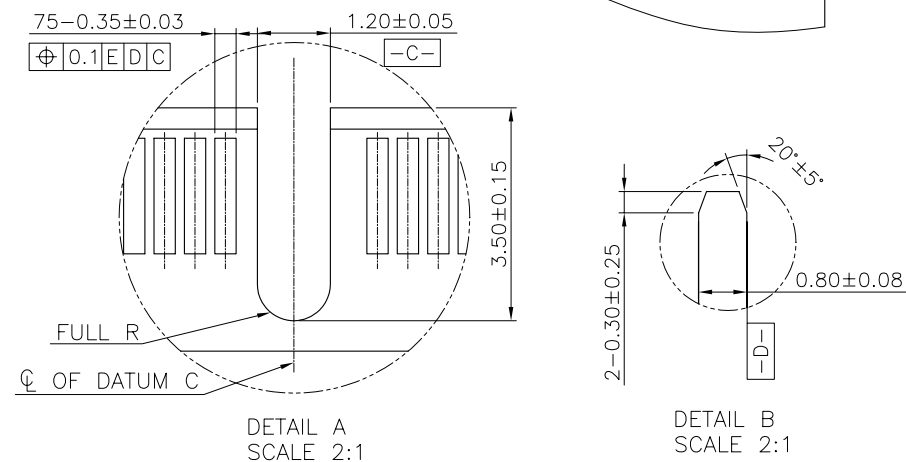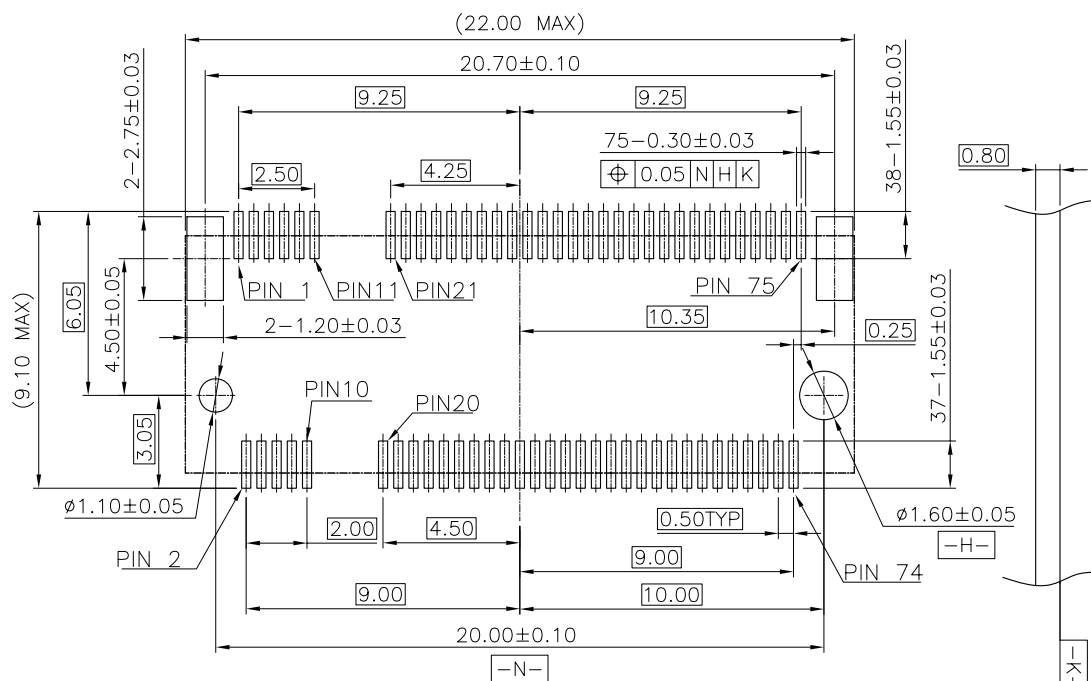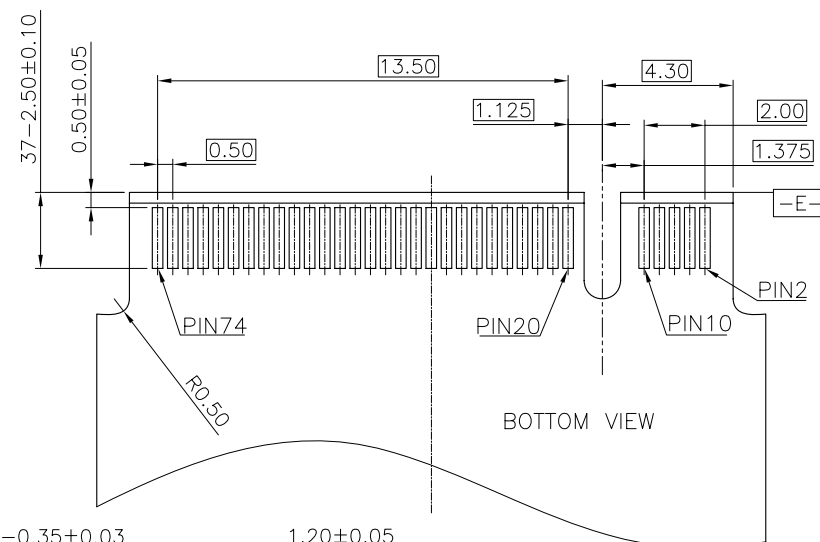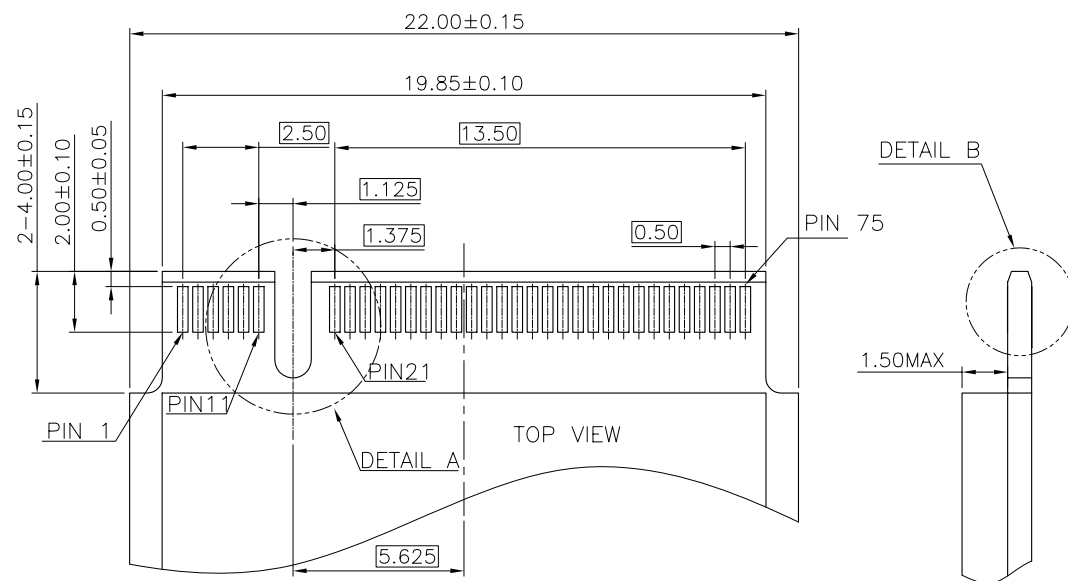

RECOMMENDED PCB LAYOUT(TOP VIEW)

DEFAULT TOLERANCE $\pm 0.05\text{MM}$

 深圳市华宇创精密电子有限公司					
TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X* ±2* X.X* ±0.5*		DRAWN BY : 陈一鸣 DATE : 2014-02-23		PART NAME: NGFF M.2 B KEY 2.3H 0.5PH	
 UNIT: mm [inch]		CHECKED BY: 马跃 DATE : 2014-02-23		PART NO. HXCW09B-05NGFF-230B	
		APPROVED BY: 邱敏 DATE : 2014-02-23		MOLD NO.	
SCALE:1:1	SIZE: A4	SHEET NO. 1 OF 1			

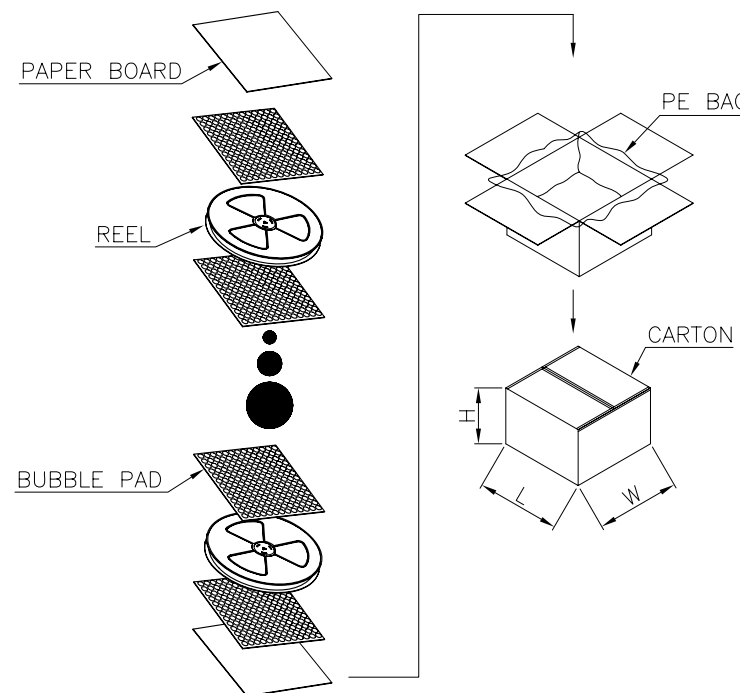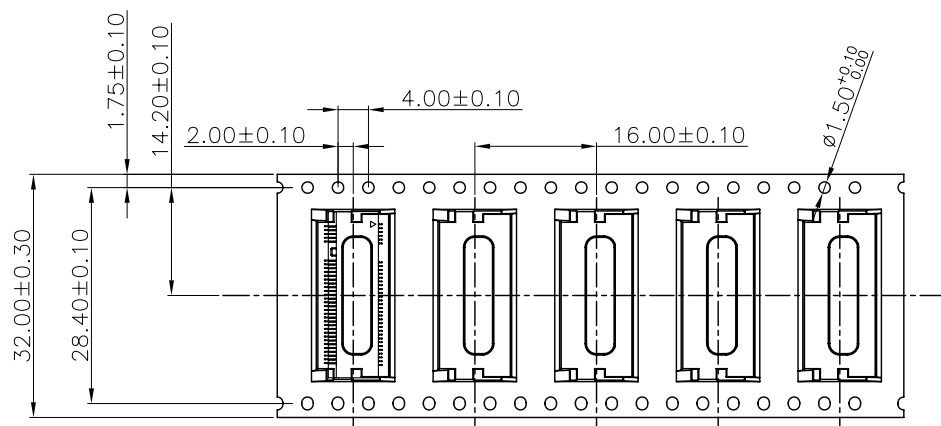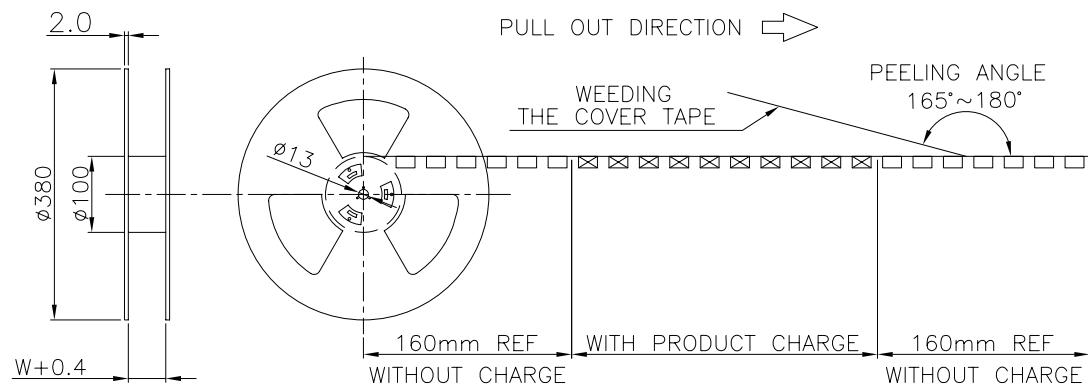

1500	12000
PCS/REEL	PCS/CARTON



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X." $\pm 2^{\circ}$ X.X" $\pm 0.5^{\circ}$ UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 包装图	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	
			SHEET NO.	1 OF 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [I/O Connectors](#) category:

Click to view products by [HOAUC](#) manufacturer:

Other Similar products are found below :

[571763P](#) [59811-0000](#) [67-06P12-60SX](#) [D20419-211](#) [75-107636-15G](#) [PCR-E20LMD-SL+](#) [PCR-E36PM](#) [PCS-XE26LKA](#) [G38A71314B](#)
[1571250010](#) [157-22500-3](#) [B1005A1-001-N](#) [192991-0703](#) [FCN-260C024-AL0](#) [2000314-1](#) [200331-1](#) [PCS-E28FS+](#) [PCS-XE26SLFDT+](#)
[G730VID08BDC24](#) [HDR-E14MSG1+](#) [54182-0605](#) [38113800006](#) [DP3AR020WQ1R200](#) [DRA-26PC-F0R](#) [Z4.102.0680.0](#) [500-1040](#) [ZP-](#)
[4008-66L](#) [0760665001](#) [5554841-1](#) [0756405005](#) [10099439-003C-TRLF](#) [226-0348-000](#) [10137239-0011LF](#) [70.060.1028.0](#) [109029-ZZ](#) [GT1-](#)
[DA04CST](#) [231-303](#) [FCN-260C024-C/S3](#) [FCN-261R024-G/5L](#) [FCN-260C024-A/S3](#) [10148298-101LF](#) [10148112-101LF](#) [B7B-ZR](#) [1-1888321-](#)
[2](#) [1-1888321-3](#) [UPFS-4M08-00C6](#) [10137846-0010LF](#) [52370-2670](#) [171224-1013](#) [10031567-001C-TRLF](#)