

A

B

C

D

E

F

G

A

B



C

D

E

F

G


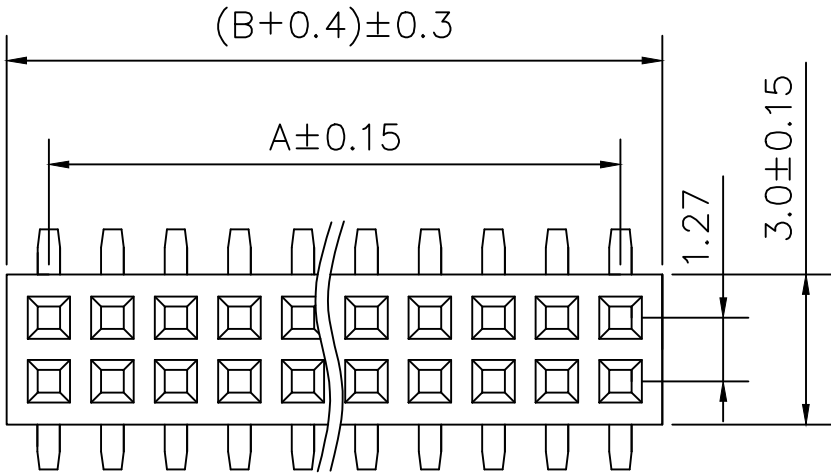


SPECIFICATIONS

Current Rating: 1.0 Amps
Withstanding Voltage: AC 500V
Insulation Resistance:1000MΩ Min
Contact Resistance: 20mΩ Max
Operation Temperature: -40°to+105°
Insrlator Material: Polyester
Contact Material: Phosphor bronze
Standard: PA6T
Contact Plating:Gold Flash
Max.Processing Temp: 200°C for30-60seconds
(255°C for5seconds)

尺寸对列表

H	PC	PB
4.3	4.8	4.6

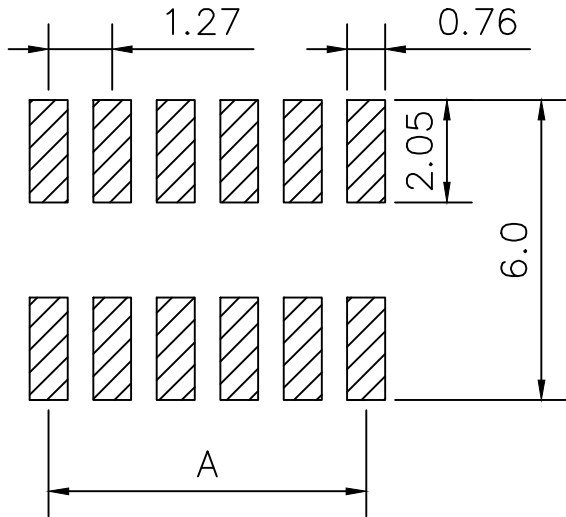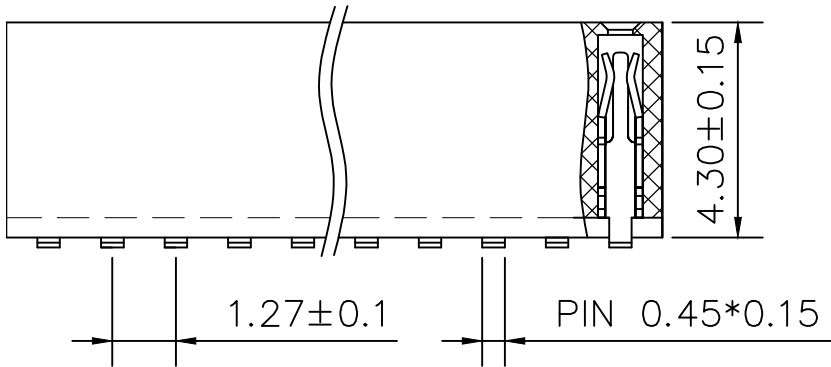

RECOMMEND P. C. B LAYOUT

PCB TOLERANCE: ±0.05 (TOP VIEW)

2	接触	铜	镀金	
1	基座	PA6T	本色	
序号	品名	材质	电镀/颜色	备注



深圳市虹成电子有限公司

品名 TITLE	排母
料号 PART NO	HC-PM127-4.3H-2x26PS

一般公差 TOLERANCE	比列 SCALE	1:1	制图 DRAW		AhYe	审核 CHECKED	夏操云	批准 APPROVE	赵亮亮
X :±0.30 X° :±5°	单位 UNIT	MM							
X.X :±0.25 X.X° :±1°	张数 PART NO	1 OF 1							
X.XX:±0.20 X.XX° :±0.5°	版本 REV	A							



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) ***category:***

Click to view products by [Hong Cheng](#) ***manufacturer:***

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-4007](#) [641938-9](#) [65692-001LF](#) [65781-018](#) [65781-047](#) [65817-010LF](#) [67095-007LF](#)
[67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#)
[8-1437020-4](#) [819-22-004-30-001101](#)