

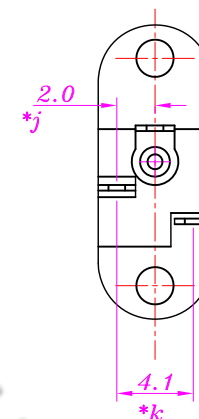
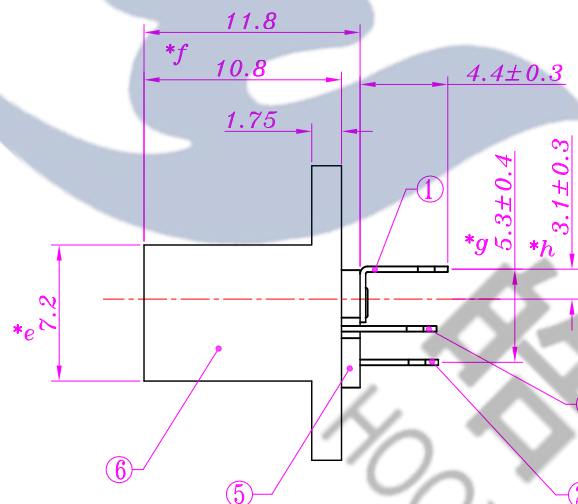


SPECIFICATION

1. Rating : DC 30V 0.5A.
2. Contact resistance: $\leq 100\text{m}\Omega$.
3. Insulation resistance: $\geq 100\text{M}\Omega$ (DC250V).
4. Withstanding voltage: 500VAC .
5. Insertion and extraction force: 3-30N.
6. Life test: 5,000 cycles.
7. Operation temperature range: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$.

P.C.B LAYOUT

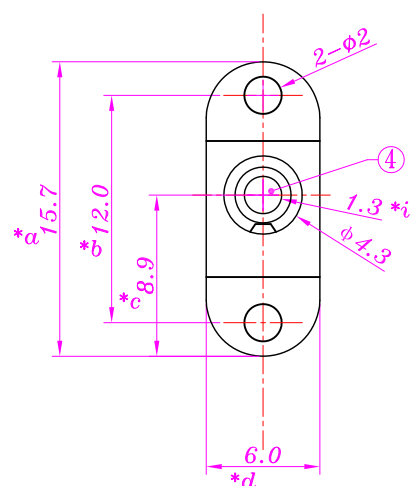

					TOLERANCE UNLESS SPECIFIED								
6	CASE	PBT	1	BLACK	<1.5: ±0.1mm	ANGULAR ±1°	1						
5	COVER	PCB	1	YELLOW	>1.5~5.0: ±0.25mm		NO	DATE	REVISIONS			BY	APPD
					>5.0: ±0.3mm								
4	PING	BRASS	1	Ni-PLATED	TITLE: DC JACK				UNIT : MM	ROHS	DWN		
3	SPRING	BRASS	1	Ag-PLATED	MODEL: DC-008-1.3-01				SCALE: 1:1	COMPLIANT	CHK'D		
2	CURVE PIECE	PHENOLIC RESIN	1	Ag-PLATED	 DONGGUANG HAOYU ELECTRONICS CO., LTD 东莞市弘皓电子有限公司				APPD				
1	FLAT PIECE	BRASS	1	Ag-PLATED									
NO.	PART	NAME		MATERIAL	QTY	FINISHING		PRO.AGL: 					REV : A

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DC Power Connectors](#) category:

Click to view products by [HOOYA](#) manufacturer:

Other Similar products are found below :

[KLDX-SMT-0202-BPTR](#) [171-0722-E](#) [K596](#) [4C6831AX](#) [10073976-112LF](#) [LCB60PW-M](#) [LCB60PB-M](#) [LCB50PW-M](#) [LCB40PW-M](#)
[LCC30PW-M](#) [LCC40PB-M](#) [LCB40PB-M](#) [LCB50PB-M](#) [DC-002-100](#) [DC-031A-130](#) [DC-031A-100](#) [DC-003A-130](#) [DC-045-130](#) [DC-192-](#)
[130](#) [DC-033-130](#) [DC-011-100](#) [DC-002F-130](#) [DC-002-130](#) [DB-14-2F](#) [DC-183B](#) [DC-060-04A](#) [DC-099-200](#) [DC-015-250-A](#) [DC-016-200-A](#)
[DC-005A-200](#) [DC-044A-200](#) [DC-088-200](#) [DC-022A-200](#) [DC-038-150](#) [DC-012A-250](#) [DC-005C-130](#) [DC-012A-200](#) [DC-098-200](#) [DC-015-](#)
[250-P](#) [DC-015-200-A](#) [DC-013-200](#) [DC550250-1047-2H](#) [DC550250-1046-2H](#) [DC511B-117L0-001-C1](#) [DC-005A-25A](#) [DT-5525008](#) [DC-](#)
[005R-8A-2.5](#) [DC-044G2.0-PU](#) [DC-019-2.0](#) [DC-033A-1.0](#)