

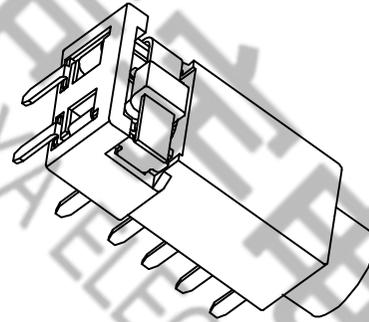


P.C.B LAYOUT

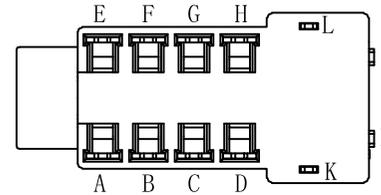

SCHMATIC

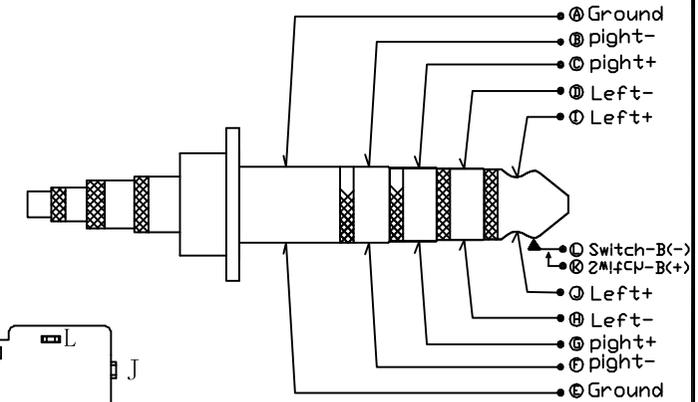

SPECIFICATION

1. Rating : DC 12V 1A.
2. Contact resistance: $\leq 50m\Omega$.
3. Insulation resistance: $\geq 100M\Omega$ (DC500V).
4. Withstanding voltage: 500VAC .
5. Insertion and extraction force: 3-30N.
6. Life test: 5,000 cycles.
7. Operation temperature range: $-25^{\circ}C \sim 85^{\circ}C$.

				TOLERANCE UNLESS SPECIFIED								
7	HOUSING	PA9T	1									
6	SLEEVE	BRASS	1	Au-PLATED	$< 1.5: \pm 0.1mm$ $> 1.5 \sim 5.0: \pm 0.25mm$ $> 5.0: \pm 0.3mm$	ANGULAR $\pm 1^{\circ}$						
5	CONTACT 12#	PHOSPHOR BRONZE	1	Au-PLATED			NO	DATE	REVISIONS		BY	APPD
4	CONTACT 11#	BRASS	1	Au-PLATED			TITLE: PHONE JACK		UNIT : MM	ROHS COMPLIANT	DWN	
3	CONTACT 10#	QBN2	1	Au-PLATED	MODEL: PJ-4506B-01-F		SCALE: 1:1		CHK'D			
2	CONTACT 9#	QBN2	1	Au-PLATED	 DONGGUANG HAOYU ELECTRONICS CO., LTD 东莞市弘皓电子有限公司				APPD			
1	CONTACT 1#~8#	QBN2	8	Au-PLATED					PRO.AGL:	 	REV :AO	
NO.	PART NAME	MATERIAL	QTY	FINISHING								

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [HOOYA](#) manufacturer:

Other Similar products are found below :

[2AS4T1A1M2RES](#) [C2851174](#) [C2939098](#) [C2939191](#) [C2939212](#) [C2939258](#) [C2939262](#) [C2939269](#) [C2939275](#) [C2939286](#) [C2939564](#)
[C2939567](#) [C2939581](#) [C2939584](#) [DC-002H-1.3](#) [DC0021.0](#) [DC0021.3](#) [DC-0021.65](#) [DC-003-1.3](#) [DC-003A-1.3](#) [DC-003A1.3](#) [DC-0031.3](#) [DC-](#)
[005-2.0-PU](#) [DC-005A-2.5-PU](#) [DC-005A2.0-PU](#) [DC-005B-2.0-PU](#) [DC-005B-2.5-PU](#) [DC005B2.0PU](#) [DC005C1.3SU](#) [DC-005D-2.0-PU-](#)
[SP\(UL\)](#) [DC-005E-2.0-PU-SP\(UL\)](#) [DC-005E-2.5-PU](#) [DC-005E-2.5-SU](#) [DC-005EHS-2.0-PU](#) [DC-005EHS2.0-PU](#) [DC005E2.0PU](#) [DC-005FA-](#)
[3.0-PU](#) [DC-005I-2.5-SU](#) [DC-005L2.0-PU](#) [DC-005Q-2.0-SU](#) [DC-005QB-2.0-PU-B](#) [DC-005QB-2.0-SU-B](#) [DC-005QB-2.0-SU-G](#) [DC-005QB-](#)
[2.0-SU-L](#) [DC-005QB-2.0-SU-R](#) [DC-005QB-2.0-SU-W](#) [DC-005QB-2.0-SU-Y](#) [DC-005QD-2.5-PU-B-SP](#) [DC-005QD2.0-PU-B](#) [DC-005S-2.0-](#)
[PU-G](#)