INGRESS PROTECTION: IP67

NOTE:

1.Rating1: DC12V 3A Rating2: 48VDC/125VAC/250VAC 0.1A


2.0perating fr 3.Electric Life

4. Mechanical

-5.40±0.15

18.50±0.15-

-15,30±0,20-



Life:1,	froce:75:	
Life:1,000,000	froce:75±30gf&130±30gf e:10,000	
A WAL	30gf	

COM

P3


N O

Circuit Diagram

5.84

5.84

P.C.B layout

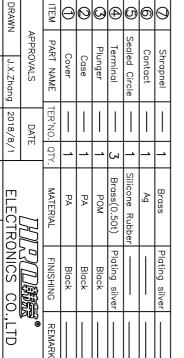

	_	2-1,40±0,10——	7	7
0.80 COM	±0.15—	3-0,50±0,02	.02	•
3-2.50	3.80			
EW				
RIPTION.		CHANGE.	CHECK. APPRO.	APPRO.

7.50±0.15 6.80±0.15

5.60±0.15

ω

3.15±0.1

1.70

13.25

NC

14.10

4.10

ø3.30-

ECN NO.

REV.

DATE.

DESCRIPTION. NEW

TOLERANCES ARE 5-70 ±0.20 ANGLE UNIT: mm 5-70 ±0.15 ±2. DRAWING NO.

APPROVALS CHECKED

PART NO. ĦE:

MICRO SWITCHS

K9-1801C-02

SCALE: 1:1

PROJ: SHEET 1 OF

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Basic / Snap Action Switches category:

Click to view products by HRO parts manufacturer:

Other Similar products are found below:

5SM901-S12 5SM9-S12N195 602EN532 602EN535-RB 604HE162 604HE223-6B 624HE17-RB 6HM82 6HM89 6SE1 6SX1-H58

70500216 70599106 71051 MBH2731 79211923 79218589 7AS12 MIL30126AB6BBMD4A12XAU ML-1155 ML-1376 831010C3.0

831090C2.EL 83131904 84212012 8AS239 8HM73-3 8SX26-H33 914CE1-6G PL-100 11SM1077-H4 11SM1077-H58 11SM1-TN107

11SM405 11SM8423-H2 11SX37-T 11SX48-H58 11SM2442-T 11SM76-T 11SM77-H58 11SM863-T 11SM866 A7CN-1M-1-LEFT

A831700C7.0 121EN188-R 1245.0120 125EN56-RB 1267.0101 1267.7101 D459-PBAA