


SENCITY® Urban 200

1399.31.0273

Properties

- Supports 4G Cellular Bands from 1.7 GHz till 2.7 GHz and 5G Cellular Bands from 3.4 GHz till 4.2 GHz in 4x4 MIMO configuration
- Gain 7dBi
- Half power beamwidth of 85° (vertical) and 70° (Horizontal) in 4G Bands. Half power beamwidth of 85° (vertical) and 80° (Horizontal) in 5G Bands.
- Plenum rated cable terminated with 4310 male connector

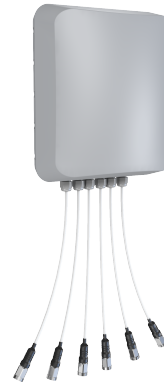

Electrical data				
	Band 1	Band 2	Band 3	Band 4
Name	Cellular 1	Cellular 2	Cellular 3	Cellular 4
Frequency	1710 MHz ... 1880 MHz	1920 MHz ... 2170 MHz	2500 MHz ... 2700 MHz	3400 MHz ... 3600 MHz
Impedance	50 Ω	50 Ω	50 Ω	50 Ω
VSWR	2	1.5	1.9	1.5
Gain	7 dBi	7 dBi	6.5 dBi	6 dBi
HPBW vertical	85 °	85 °	85 °	85 °
HPBW horizontal	70 °	70 °	70 °	80 °
Isolation between Ports	20 dB	20 dB	20 dB	18 dB
Ambient Temperature	25 °C	25 °C	25 °C	25 °C
Composite Power max	45 W	42 W	40 W	18 W

	Band 5
Name	Cellular 5
Frequency	3800 MHz ... 4200 MHz
Impedance	50 Ω
VSWR	1.6
Gain	5 dBi
HPBW vertical	85 °
HPBW horizontal	80 °
Isolation between Ports	18 dB
Ambient Temperature	25 °C

SENCITY® Urban 200

1399.31.0273

	Band 5
Composite Power max	16 W

Electrical remarks

IMD level	-150 dBc at carrier power 2x 40 dBm
-----------	-------------------------------------

Ports

	Port 1	Port 2	Port 3	Port 4
Port name	Cellular	Cellular	Cellular	Cellular
Connector	4.3-10, straight, male	4.3-10, straight, male	4.3-10, straight, male	4.3-10, straight, male
Cable type	sucoform_122-LA-CU-CMP	sucoform_122-LA-CU-CMP	sucoform_122-LA-CU-CMP	sucoform_122-LA-CU-CMP
Cable length	1 m	1 m	1 m	1 m
Polarization	+45° slant	-45° slant	+45° slant	-45° slant
DC grounded	No	No	No	No

	Port 5	Port 6
Port name	Cellular	Cellular
Connector	4.3-10, straight, male	4.3-10, straight, male
Cable type	sucoform_122-LA-CU-CMP	sucoform_122-LA-CU-CMP
Cable length	1 m	1 m
Polarization	+45° slant	-45° slant
DC grounded	No	No

Connections

	Port 1	Port 2	Port 3	Port 4	Port 5	Port 6
Port name	Cellular	Cellular	Cellular	Cellular	Cellular	Cellular
Band 1			✓	✓		
Band 2			✓	✓		
Band 3			✓	✓		
Band 4	✓	✓			✓	✓
Band 5	✓	✓			✓	✓

Mechanical data

Weight	0.8 kg
Dimensions	184.8 mm x 164.6 mm x 84.2 mm (Height x Width x Depth)

Material data

Radome material	PC (Polycarbonate)
Radome colour	RAL 7035 (light gray)

Environmental data

Operation temperature	-40 °C ... 70 °C
Storage temperature	-40 °C ... 70 °C
Transport temperature	-40 °C ... 70 °C
Environment (application)	Indoor/Outdoor
Ingress protection (IP Rating)	Mated / IP 66 / IP 67

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antennas](#) category:

Click to view products by [Huber & Suhner](#) manufacturer:

Other Similar products are found below :

[930-033-R](#) [A09-F8NF-M](#) [108-00016-050](#) [W1049B090](#) [WTL2449CQ1-FRSMM](#) [0600-00060](#) [GD53-25](#) [S9025PLSMF](#) [GPSCPMM00](#) [ANT-WP868SMA-Y](#) [CBNC58](#) [MD10-004](#) [ABFT](#) [LP800NMOW](#) [NMOQ88C](#) [NMOQB](#) [NMOQC](#) [ANT-GSMGPSPUKS](#) [60210](#) [60140](#) [ANT-8WPIG-UFL](#) [ANT-GPSPUKS](#) [A21H0](#) [29000863](#) [EXD450TN](#) [2.4GHz 2dBi-1.13-L=50mm](#) [3E0702BK-005](#) [22100003](#) [DL-T022-2.4G](#) [DL-T023-4G](#) [T1-915M](#) [DL-T021-2.4GW](#) [DL-T021-2.4G](#) [KH-IPEX-1.13](#) [BWGNSCNX16-6B1Y2L120](#) [BWGNSCNX15-15B1Y4L120](#) [DL-T023-4GW](#) [3N0401LG-021](#) [KHA\(RG1.13\)-TX90B-IPEX](#) [KHA\(RG1.13\)-TX80B-IPEX](#) [KH-137-TX90B-IPEX4](#) [KH-113-TX100B-IPEX4](#) [KH-113-TX60B-IPEX4](#) [KH-081-TX300-IPEX](#) [3K0001BK00-001](#) [3K0001BK00-002](#) [3N0401LG-038](#) [3N0401BK-049](#) [PRO-OB-440](#) [DL-F8-5G](#)