
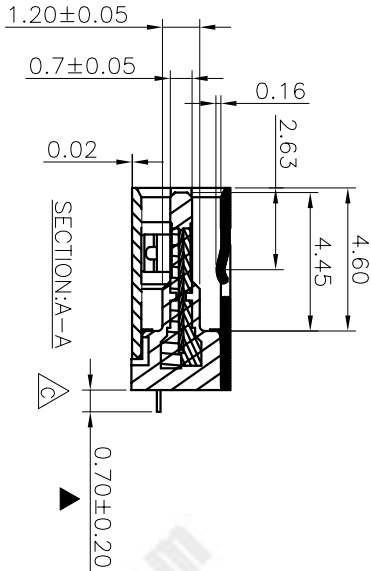
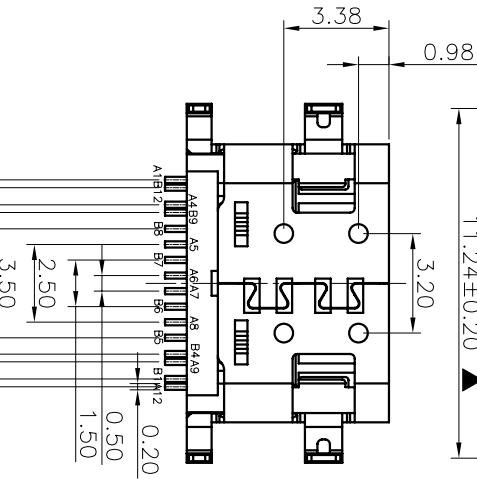
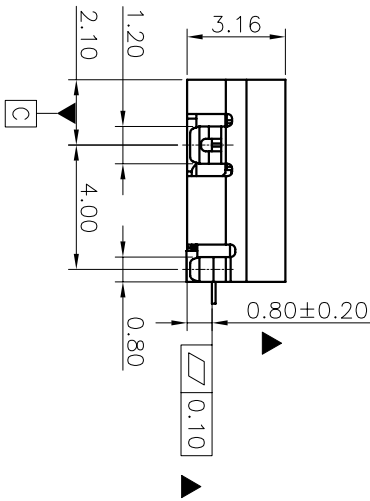
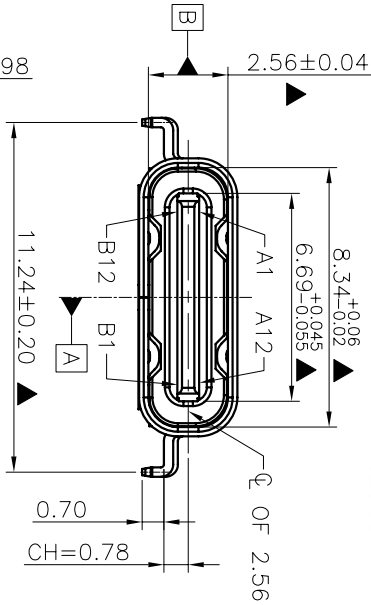
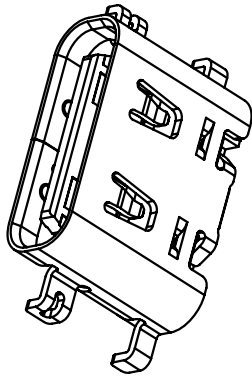


REV	ECN No.	DATE	REMARK
A0	NEW	2019.11.20	NEW RELEASE
B	ECN202105002	2021.05.06	增加真空包装料号规格

10987654321

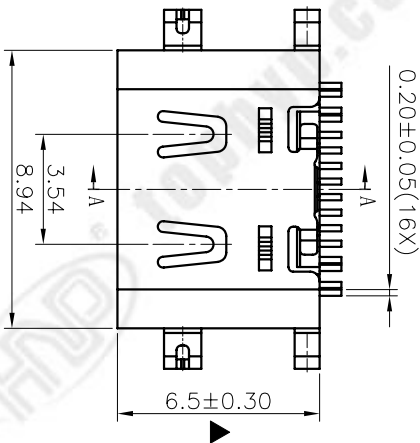

PIN DEFINITION:																	
PIN No.	A1	A4	A5	A6	A7	A8	A9	A12	PIN No.	B12	B9	B8	B7	B6	B5	B4	B1
SIGNAL NAME	GND	VBUS	CC1	D+	D-	SBU1	VBUS	GND	SIGNAL NAME	GND	VBUS	SBU2	D-	D+	CC2	VBUS	GND

- NOTE:
- ELECTRICAL PERFORMANCE.
 - 1-1. CURRENT RATING:5 AMPS. FOR TOTAL VBUS/GND PINS; 1.25AMPS FOR CC PINS,0.25 AMPS. FOR ALL OTHER CONTACT.
 - 1-2. VOLTAGE RATING:20V DC/AC (RMS. MAX)
 - 1-3. LCR: VBUS & GND PINS AND OTHER PINS: 40MΩ/PIN MAX. SHIELD:50MΩ/MAX.
 - LCR MAX. CHANGE OF ALL PINS: 10MΩ.
 - 1-4.INSULATION RESISTANCE: 100MΩ MIN
 - 1-5.DIELECTRIC WITHSTAND VOLTAGE:AC 100V FOR 1 MINUTE.
 - 2.MECHANICAL PERFORMANCE.
 - 2-1.INSERTION FORCE: 5~20N.
 - 2-2.EXTRACTION FORCE: 8~20N.
 - 2-3.DURABILITY: 10000 CYCLES.
 - 3.ENVIRONMENTAL PERFORMANCE.
 - OPERATING TEMPERATURE: -25℃~+85℃.
 - 4.IR REFLOW.
 - THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260℃.
 - 5.COMPLIANCE WITH ROHS REQUIREMENTS.
 - 6.SALT SPRAY:48H
 7. With* ▲ for the key control size
8. PART NUMBER CODE:
TC172-16 S X X XX R- 02
- PACKING OPTIONS
R:TAPE & REEL
V:TAPE & REEL+真空包装(专用客户指定包装)
- CONTACTS PLATED:
12>Contact Area: Au 3u"
Solder Tails:GF
15>Contact Area: Au 30u"
Solder Tails:GF
- HOUSING COLOR:
B:BLACK
L:BLUE
- HOUSING MATERIAL:
C:PA9T
L:LCP

TYPE:

4	SHELL	SUS304 1/2H T=0.30mm	NICKEL 30u" MIN PLATING	1PCS
3	SHIELDING PLATE	SUS301 3/4H T=0.15mm	---	1PCS
2	CONTACT	C18400-H T=0.12mm	N 50u" MIN. UNDER PLATED OVER ALL PLATING GIVE UP THE SOLDER AREA OF CONTACT.	2SET
1	HOUSING	PA9T/LCP U94V-0	BLACK/BLUE	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

PART NO.:	DRAWN BY:	K.DING
SEE THE PART NUMBER CODE	CHECKED BY:	S.L.LI
GENERAL TOLERANCES	TITLE	HON YUAN PRECISION IND. CO.,LTD.
X.XXXX ± ---	USB TC 16PIN (L=6.5) 沉板0.8外形带弹片款	SHENZHEN, CHINA, R.O.C.
X.XXX ± 0.10	W.P.LU	
X.XX ± 0.20		
X.X ± 0.30		
ANGULAR ± 3°		

THIRD ANGLE PROJECTION	DIMENSIONS	SCALE	DRAWING	SHEET NO.	1 OF 2	TC172-16SDB2R-02
	mm	1:1	A4			

REV	ECN No.	DATE	REMARK
A0	NEW	2019.11.20	NEW RELEASE
B	ECN202105002	2021.05.06	增加真空包装料号规格

10987654321

Recommended PCB Layout

General Tolerance ± 0.05

SCALE:2:1

PART NO.:	DRAWN BY:	HON YUAN
SEE THE PART NUMBER CODE	K.DING	
GENERAL TOLERANCES	CHECKED BY:	
S.L.J.		
APPROVED BY:	TITLE	
W.P.LU	USB TC 16PIN (L=6.5) 沉板0.8mm薄片规格	
ANGULAR	THIRD ANGLE PROJECTION	DIMENSIONS
± 3°	± 0.10	SCALE
± 0.20	± 0.20	1:1
± 0.30	± 0.30	DRAWING
		A4
		SHEET NO.
		2 OF 2
		DWG. NO.
		10172-16SCH2R-02

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [USB Connectors](#) category:

Click to view products by [HYP](#) manufacturer:

Other Similar products are found below :

[950](#) [MUSBD11135](#) [17-200721](#) [217450-1](#) [KMBVX-TH-5S-B30](#) [KUSBX-AS2N-W](#) [KUSBX-SMT2AP1S-W30](#) [935](#) [957](#) [30-498-6](#) [SK-60A-2](#)
[1734082-1](#) [30-470](#) [30-489](#) [30-541](#) [A-USB A-2P-C](#) [MIKROE-1451](#) [USBFTVSCCG](#) [1-1734084-2](#) [10135326-001LF](#) [4198](#) [USB-A-D-VT](#)
[USB-A-S-RA-TSMT](#) [1310-1023-02](#) [690-024-633-031](#) [UB-20PMFP-LC7001](#) [17-200011](#) [UB-20AFMM-LL7A01](#) [1040870124](#) [CAP-](#)
[WCCMLPB1](#) [CAP-WCCMLPC1](#) [2274475-3](#) [UB-20BMFA-SL8001](#) [914-614A2025S10200](#) [USB3FTV7SAGF059](#) [ZX40-B-5S-1500-](#)
[STDA\(30\)](#) [GSB3116344HR](#) [USB3FTV2SAZNF459](#) [USB3FTV7SAZNF459](#) [U221-041N-1WVS62-F5D](#) [HYCW153-USBD05-500B](#)
[HYCW219-USBD05-075B](#) [HYCW148-USBD05-117B](#) [HYCW149-USBD05-740B](#) [HYCW204-USBD05-108B](#) [HYCW214-USBA04-113B](#)
[HYCW213-USBA04-113B](#) [UB-20AMFM-SL7A01](#) [KMMX-BSMT35S-1-B30TR](#) [2345986-1](#)