



Order key

Part number

Type

Thread

DST-JFRM-ZB-0001-DS10X12

dryspin® technology

iglidur® J

Form F

Hand of rotation

Metric

Zero-backlash

Type 0001

Thread-Type


Thread-Ø [mm]

Pitch



Installation instructions and video tutorials

► www.igus.eu/zero-backlash

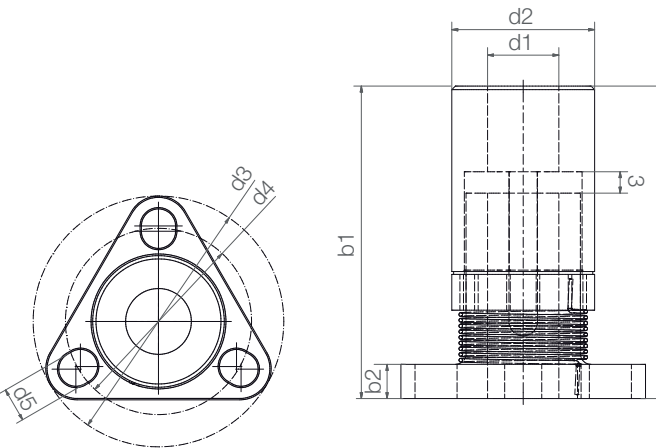

Technical data

Thread	Max. stat. axial F [N]	Max. idling torque (with spring)	Weight [g]	Part No.
Ds6.35x2.54	75	0.005-0.02	5.1	DST-JFRM-ZB-0001-DS6.35X2.54
Ds6.35x5.08	75	0.005-0.02	5.1	DST-JFRM-ZB-0001-DS6.35X5.08
Ds6.35x12.7	75	0.005-0.02	5.1	DST-JFRM-ZB-0001-DS6.35X12.7
Ds6.35x25.4	75	0.005-0.02	5.1	DST-JFRM-ZB-0001-DS6.35X25.4
Ds8x10	150	0.01-0.03	15.2	DST-JFRM-ZB-0001-DS8X10
Ds8x15	150	0.01-0.03	15.2	DST-JFRM-ZB-0001-DS8X15
Ds10x12	150	0.01-0.04	15.2	DST-JFRM-ZB-0001-DS10X12
Ds10x25	150	0.01-0.04	15.2	DST-JFRM-ZB-0001-DS10X25
Ds10x50	150	0.01-0.04	15.2	DST-JFRM-ZB-0001-DS10X50

Dimensions [mm]

Thread	d1	d2	d3	d4	d5	b1 ⁴⁰⁾	b2	Part No.
Ds6.35x2.54	6.35	13.5	28	22.2	3.7	31-36	4.1	DST-JFRM-ZB-0001-DS6.35X2.54
Ds6.35x5.08	6.35	13.5	28	22.2	3.7	31-36	4.1	DST-JFRM-ZB-0001-DS6.35X5.08
Ds6.35x12.7	6.35	13.5	28	22.2	3.7	31-36	4.1	DST-JFRM-ZB-0001-DS6.35X12.7
Ds6.35x25.4	6.35	13.5	28	22.2	3.7	31-36	4.1	DST-JFRM-ZB-0001-DS6.35X25.4
Ds8x10	8	20	38.1	28.3	5.2	41-47	4.8	DST-JFRM-ZB-0001-DS8X10
Ds8x15	8	20	38.1	28.3	5.2	41-47	4.8	DST-JFRM-ZB-0001-DS8X15
Ds10x12	10	20	38.1	28.3	5.2	41-47	4.8	DST-JFRM-ZB-0001-DS10X12
Ds10x25	10	20	38.1	28.3	5.2	41-47	4.8	DST-JFRM-ZB-0001-DS10X25
Ds10x50	10	20	38.1	28.3	5.2	41-47	4.8	DST-JFRM-ZB-0001-DS10X50

⁴⁰⁾ Variable according to thread pitch / clearance

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Iigus](#) manufacturer:

Other Similar products are found below :

[GTM-1220-005](#) [E2.10.10.038.0](#) [E2.10.20.018.0](#) [E2.10.30.018.0](#) [E4.32.07.150.0](#) [E4.32.10.075.0](#) [E4.321.10.2.12](#) [158.050.100.0](#) [BB-626-](#)
[B180-10-ES](#) [168.075.125.0](#) [J260-PF-0175-0250](#) [1680.075.12](#) [I170-PF-0175-0250](#) [E2.100.20.34PZ](#) [E2.10.20.028.0](#) [E4.32.10.100.0](#) [EALM-10](#)
[XSM-0608-08](#) [WSM-0608-08](#) [158.100.175.0](#) [168.050.100.0](#) [168.150.200.0](#) [2000.32](#) [3480.150.150.0](#) [3000.12](#) [3100.34PZB](#) [E14.2.100.0](#)
[E14.3.048.0](#) [I180-PF-0175-0750](#) [WS-10-40-1250](#) [WS-10-40-500](#) [WS-16-1000](#) [WS-16-60-1000](#) [WS-20-80-1000](#) [A500FM-2528-16](#) [BB-](#)
[6006-B180-30-ES](#) [EBLM-20](#) [EGLM-12](#) [KARM-16](#) [KSTM-GT-40](#) [MFM-0408-04](#) [TRE.100.145.0.B](#) [WS-16-60-1250](#) [WS-16-60-500](#) [WW-](#)
[16-60-10](#) [WW-20-80-15](#) [XSM-0810-12](#) [06.16.018.0](#) [06.16.038.0](#) [06.20.018.0](#)