

Final datasheet

CoolSiC™ Hybrid Discrete with TRENCHSTOP™ 5 Fast-Switching IGBT and CoolSiC™ Schottky Diode G5 for Automotive

Features

- $V_{CE} = 650\text{ V}$
- $I_C = 50\text{ A}$
- Best-in-class efficiency in hard switching and resonant topologies
- 650 V breakdown voltage
- Trenchstop™ 5 fast-switching IGBT
- CoolSiC™ Schottky diode G5
- Low gate charge Q_G
- Maximum junction temperature $T_{vjmax} = 175^\circ\text{C}$
- Kelvin emitter connection for optimized switching performance

Potential applications

- On-board charger
- DC/DC converter



Product validation

- Qualified for Automotive Applications. Product Validation according to AEC-Q100/101

Description

Pin definition:

- Pin 1 - Gate
- Pin 2 - Kelvin Emitter
- Pin 3...7 - Emitter
- Tab - Collector



Type	Package	Marking
AIKBE50N65RF5	PG-TO263-7-HV-ND4.2	AKE5ERF

Table of contents

	Description	1
	Features	1
	Potential applications	1
	Product validation	1
	Table of contents	2
1	Package	3
2	IGBT	3
3	Diode	6
4	Characteristics diagrams	7
5	Package outlines	12
6	Testing conditions	13
	Revision history	14
	Disclaimer	15

1 Package

Table 1 Characteristic values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Storage temperature	T_{stg}		-55		150	°C
Soldering temperature	T_{sold}				260	°C
IGBT thermal resistance, junction-case	$R_{th(j-c)}$			0.35	0.46	K/W
Diode thermal resistance, junction-case	$R_{th(j-c)}$			0.48	0.62	K/W

2 IGBT

Table 2 Maximum rated values

Parameter	Symbol	Note or test condition		Values	Unit
Collector-emitter voltage	V_{CE}	$T_{vj} = -40...175\text{ °C}$		650	V
DC collector current, limited by T_{vjmax}	I_C		$T_c = 25\text{ °C}$	96	A
			$T_c = 100\text{ °C}$	65	
Pulsed collector current, t_p limited by T_{vjmax} ¹⁾	I_{Cpulse}			150	A
Turn-off safe operating area ¹⁾		$V_{CE} \leq 650\text{ V}, T_{vj} \leq 175\text{ °C}$		150	A
Gate-emitter voltage ¹⁾	V_{GE}			±20	V
Transient gate-emitter voltage	V_{GE}	$t_p \leq 10\text{ }\mu\text{s}, D < 0.01$		±30	V
Power dissipation ¹⁾	P_{tot}		$T_c = 25\text{ °C}$	326	W
			$T_c = 100\text{ °C}$	163	

1) Not subject to production test. Parameter verified by design/characterization.

Table 3 Characteristic values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Collector-emitter breakdown voltage	V_{BRCES}	$I_C = 0.2\text{ mA}, V_{GE} = 0\text{ V}$	650			V
Collector-emitter saturation voltage	V_{CESat}	$I_C = 50\text{ A}, V_{GE} = 15\text{ V}$	$T_{vj} = 25\text{ °C}$	1.66	2.1	V
			$T_{vj} = 125\text{ °C}$	1.9		
			$T_{vj} = 175\text{ °C}$	2.03		
Gate-emitter threshold voltage	V_{GETh}	$I_C = 0.5\text{ mA}, V_{CE} = V_{GE}$	3.2	4	4.8	V

(table continues...)

Table 3 (continued) Characteristic values

Parameter	Symbol	Note or test condition		Values			Unit
				Min.	Typ.	Max.	
Zero gate-voltage collector current	I_{CES}	$V_{CE} = 650 \text{ V}, V_{GE} = 0 \text{ V}$	$T_{vj} = 25 \text{ °C}$		16	120	μA
			$T_{vj} = 175 \text{ °C}$		1600		
Transconductance	g_{fs}	$I_C = 50 \text{ A}, V_{CE} = 20 \text{ V}$			62		S
Input capacitance	C_{ies}	$V_{CE} = 25 \text{ V}, V_{GE} = 0 \text{ V}, f = 100 \text{ kHz}$			2700		pF
Output capacitance	C_{oes}	$V_{CE} = 25 \text{ V}, V_{GE} = 0 \text{ V}, f = 100 \text{ kHz}$			340		pF
Reverse transfer capacitance	C_{res}	$V_{CE} = 25 \text{ V}, V_{GE} = 0 \text{ V}, f = 100 \text{ kHz}$			10		pF
Gate charge	Q_G	$I_C = 50 \text{ A}, V_{CC} = 520 \text{ V}, V_{GE} = 15 \text{ V}$			108		nC
Turn-on delay time	$t_{d(on)}$	$V_{CC} = 400 \text{ V}, V_{GE} = 0/15 \text{ V}, R_{G(on)} = 9 \text{ }\Omega, R_{G(off)} = 9 \text{ }\Omega, L_\sigma = 30 \text{ nH}, C_\sigma = 30 \text{ pF}$	$T_{vj} = 25 \text{ °C}, I_C = 25 \text{ A}$		16.8		ns
			$T_{vj} = 100 \text{ °C}, I_C = 25 \text{ A}$		16.8		
			$T_{vj} = 150 \text{ °C}, I_C = 25 \text{ A}$		16.5		
			$T_{vj} = 175 \text{ °C}, I_C = 25 \text{ A}$		16.2		
Rise time (inductive load)	t_r	$V_{CC} = 400 \text{ V}, V_{GE} = 0/15 \text{ V}, R_{G(on)} = 9 \text{ }\Omega, R_{G(off)} = 9 \text{ }\Omega, L_\sigma = 30 \text{ nH}, C_\sigma = 30 \text{ pF}$	$T_{vj} = 25 \text{ °C}, I_C = 25 \text{ A}$		7.6		ns
			$T_{vj} = 100 \text{ °C}, I_C = 25 \text{ A}$		8.4		
			$T_{vj} = 150 \text{ °C}, I_C = 25 \text{ A}$		9.2		
			$T_{vj} = 175 \text{ °C}, I_C = 25 \text{ A}$		9.6		
Turn-off delay time	$t_{d(off)}$	$V_{CC} = 400 \text{ V}, V_{GE} = 0/15 \text{ V}, R_{G(on)} = 9 \text{ }\Omega, R_{G(off)} = 9 \text{ }\Omega, L_\sigma = 30 \text{ nH}, C_\sigma = 30 \text{ pF}$	$T_{vj} = 25 \text{ °C}, I_C = 25 \text{ A}$		136		ns
			$T_{vj} = 100 \text{ °C}, I_C = 25 \text{ A}$		153		
			$T_{vj} = 150 \text{ °C}, I_C = 25 \text{ A}$		167		
			$T_{vj} = 175 \text{ °C}, I_C = 25 \text{ A}$		176		

(table continues...)

Table 3 (continued) Characteristic values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Fall time (inductive load)	t_f	$V_{CC} = 400 \text{ V}$, $V_{GE} = 0/15 \text{ V}$, $R_{G(on)} = 9 \Omega$, $R_{G(off)} = 9 \Omega$, $L_\sigma = 30 \text{ nH}$, $C_\sigma = 30 \text{ pF}$	$T_{vj} = 25 \text{ }^\circ\text{C}$, $I_C = 25 \text{ A}$	14		ns
			$T_{vj} = 100 \text{ }^\circ\text{C}$, $I_C = 25 \text{ A}$	14		
			$T_{vj} = 150 \text{ }^\circ\text{C}$, $I_C = 25 \text{ A}$	13.6		
			$T_{vj} = 175 \text{ }^\circ\text{C}$, $I_C = 25 \text{ A}$	13.4		
Turn-on energy	E_{on}	$V_{CC} = 400 \text{ V}$, $V_{GE} = 0/15 \text{ V}$, $R_{G(on)} = 9 \Omega$, $R_{G(off)} = 9 \Omega$, $L_\sigma = 30 \text{ nH}$, $C_\sigma = 30 \text{ pF}$	$T_{vj} = 25 \text{ }^\circ\text{C}$, $I_C = 25 \text{ A}$	0.12		mJ
			$T_{vj} = 100 \text{ }^\circ\text{C}$, $I_C = 25 \text{ A}$	0.14		
			$T_{vj} = 150 \text{ }^\circ\text{C}$, $I_C = 25 \text{ A}$	0.15		
			$T_{vj} = 175 \text{ }^\circ\text{C}$, $I_C = 25 \text{ A}$	0.16		
Turn-off energy	E_{off}	$V_{CC} = 400 \text{ V}$, $V_{GE} = 0/15 \text{ V}$, $R_{G(on)} = 9 \Omega$, $R_{G(off)} = 9 \Omega$, $L_\sigma = 30 \text{ nH}$, $C_\sigma = 30 \text{ pF}$	$T_{vj} = 25 \text{ }^\circ\text{C}$, $I_C = 25 \text{ A}$	0.09		mJ
			$T_{vj} = 100 \text{ }^\circ\text{C}$, $I_C = 25 \text{ A}$	0.14		
			$T_{vj} = 150 \text{ }^\circ\text{C}$, $I_C = 25 \text{ A}$	0.19		
			$T_{vj} = 175 \text{ }^\circ\text{C}$, $I_C = 25 \text{ A}$	0.22		
Total switching energy	E_{ts}	$V_{CC} = 400 \text{ V}$, $V_{GE} = 0/15 \text{ V}$, $R_{G(on)} = 9 \Omega$, $R_{G(off)} = 9 \Omega$, $L_\sigma = 30 \text{ nH}$, $C_\sigma = 30 \text{ pF}$	$T_{vj} = 25 \text{ }^\circ\text{C}$, $I_C = 25 \text{ A}$	0.21		mJ
			$T_{vj} = 100 \text{ }^\circ\text{C}$, $I_C = 25 \text{ A}$	0.27		
			$T_{vj} = 150 \text{ }^\circ\text{C}$, $I_C = 25 \text{ A}$	0.34		
			$T_{vj} = 175 \text{ }^\circ\text{C}$, $I_C = 25 \text{ A}$	0.38		
Operating junction temperature	T_{vj}		-40		175	$^\circ\text{C}$

Note: Electrical Characteristic, at $T_{vj} = 25^\circ\text{C}$, unless otherwise specified.
Energy losses include “tail” and diode reverse recovery.

3 Diode

Table 4 Maximum rated values

Parameter	Symbol	Note or test condition		Values	Unit
Repetitive peak reverse voltage	V_{RRM}	$T_{vj} \geq 25\text{ °C}$		650	V
Diode forward current, limited by T_{vjmax}	I_F		$T_c = 25\text{ °C}$	57	A
			$T_c = 100\text{ °C}$	40	
Diode pulsed current, t_p limited by T_{vjmax}	I_{Fpulse}			120	A

Table 5 Characteristic values


Parameter	Symbol	Note or test condition		Values			Unit
				Min.	Typ.	Max.	
Diode forward voltage	V_F	$I_F = 30\text{ A}$	$T_{vj} = 25\text{ °C}$		1.45	1.7	V
			$T_{vj} = 125\text{ °C}$		1.6		
			$T_{vj} = 175\text{ °C}$		1.8		
Operating junction temperature	T_{vj}			-40		175	°C

4 Characteristics diagrams

Power dissipation as a function of case temperature

$$P_{\text{tot}} = f(T_c)$$


$$T_{vj} \leq 175\text{ °C}$$

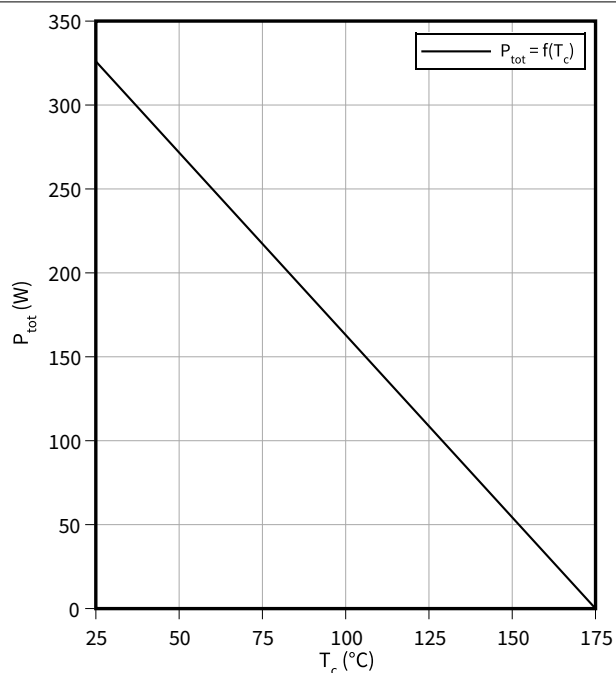

Collector current as a function of case temperature

$$I_c = f(T_c)$$


$$T_{vj} \leq 175\text{ °C}, V_{GE} \geq 15\text{ V}$$

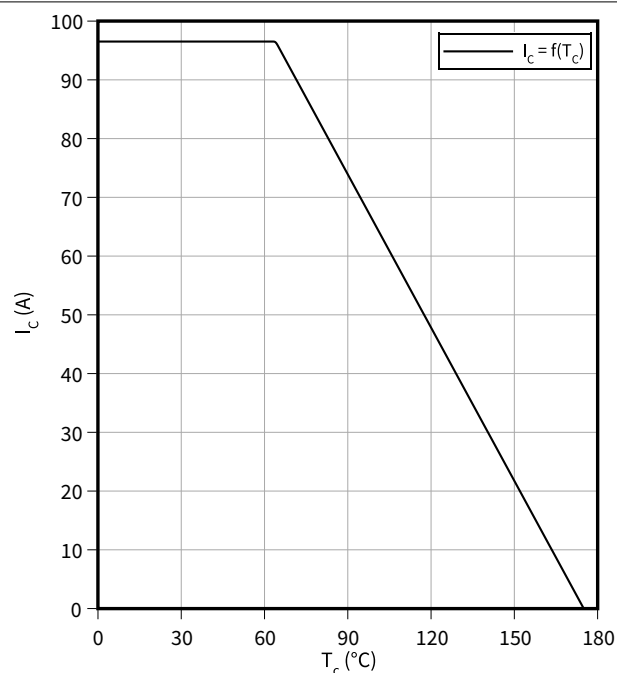

Typical output characteristic

$$I_c = f(V_{CE})$$


$$T_{vj} = 25\text{ °C}$$

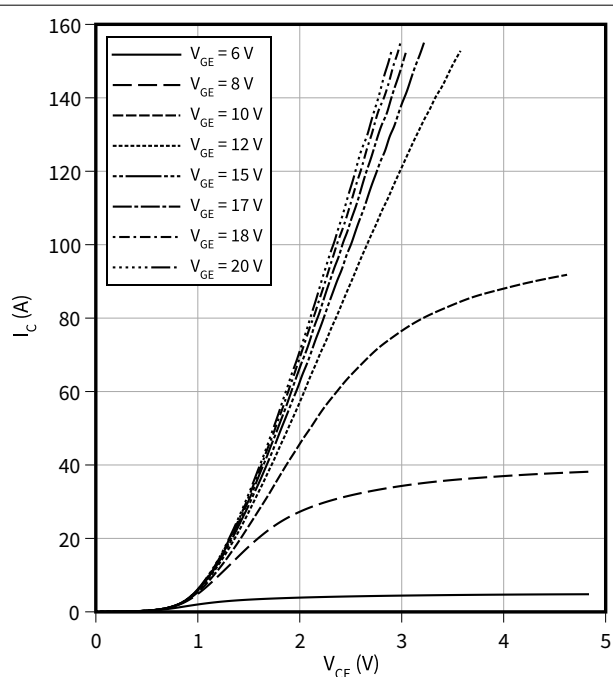

Typical output characteristic

$$I_c = f(V_{CE})$$

$$T_{vj} = 175\text{ °C}$$

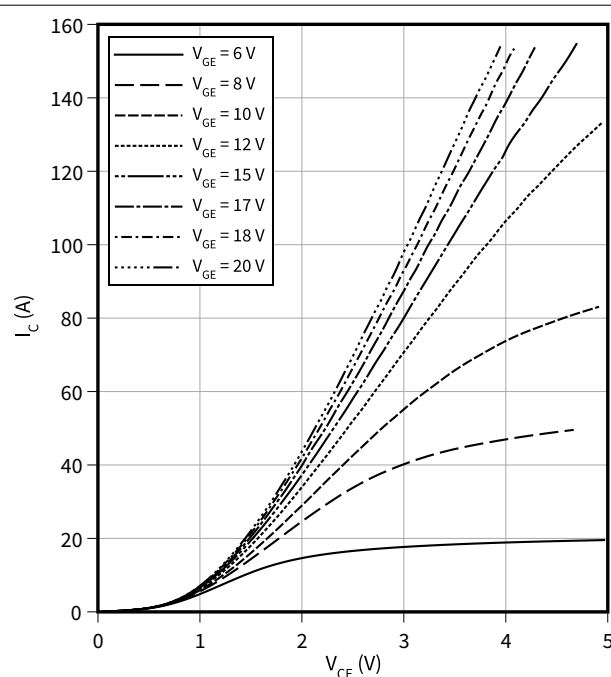


4 Characteristics diagrams

Typical transfer characteristic

$$I_C = f(V_{GE})$$


$$V_{CE} = 20 \text{ V}$$

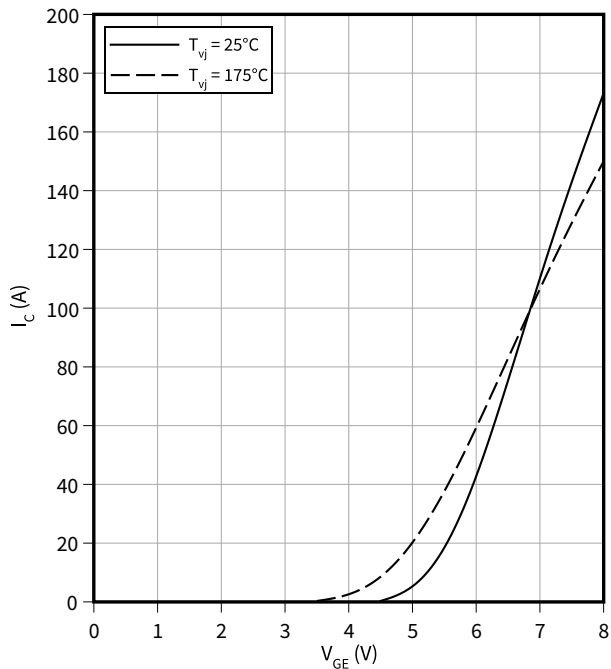

Typical collector-emitter saturation voltage as a function of junction temperature

$$V_{CEsat} = f(T_{vj})$$


$$V_{GE} = 15 \text{ V}$$

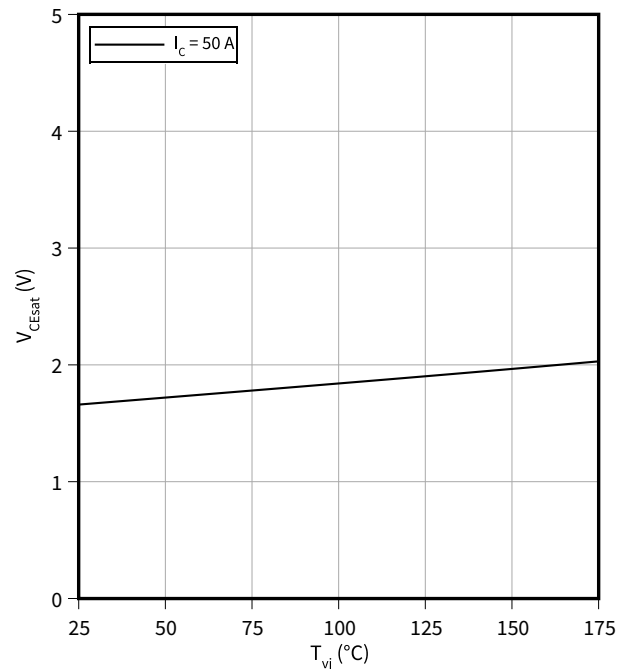

Gate-emitter threshold voltage as a function of junction temperature

$$V_{GEth} = f(T_{vj})$$


$$I_C = 0.5 \text{ mA}$$

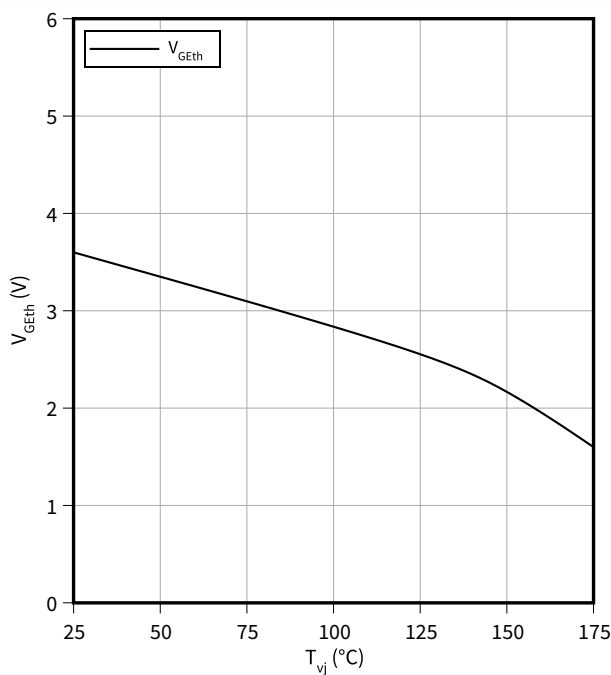

Typical switching times as a function of collector current

$$t = f(I_C)$$

$$V_{CC} = 400 \text{ V}, T_{vj} = 150^\circ\text{C}, V_{GE} = 0/15 \text{ V}, R_G = 9 \Omega$$

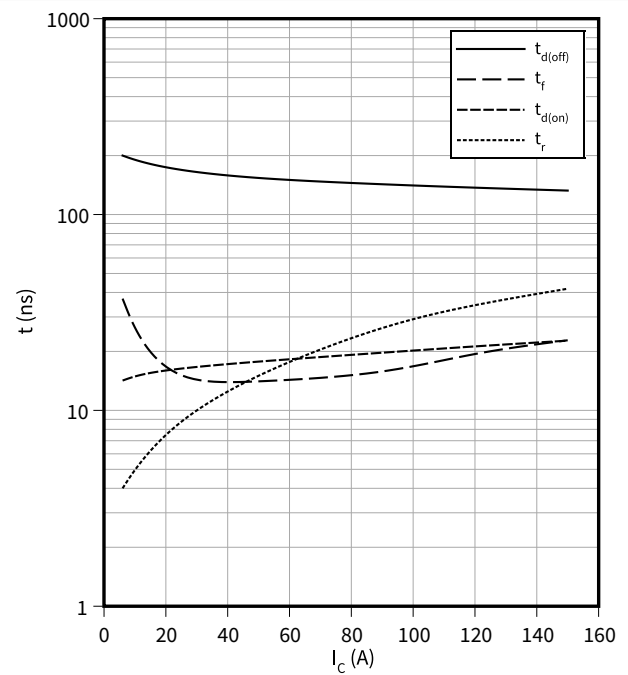


4 Characteristics diagrams

Typical switching times as a function of gate resistor

$$t = f(R_G)$$


$I_C = 25 \text{ A}$, $V_{CC} = 400 \text{ V}$, $T_{vj} = 150 \text{ °C}$, $V_{GE} = 0/15 \text{ V}$

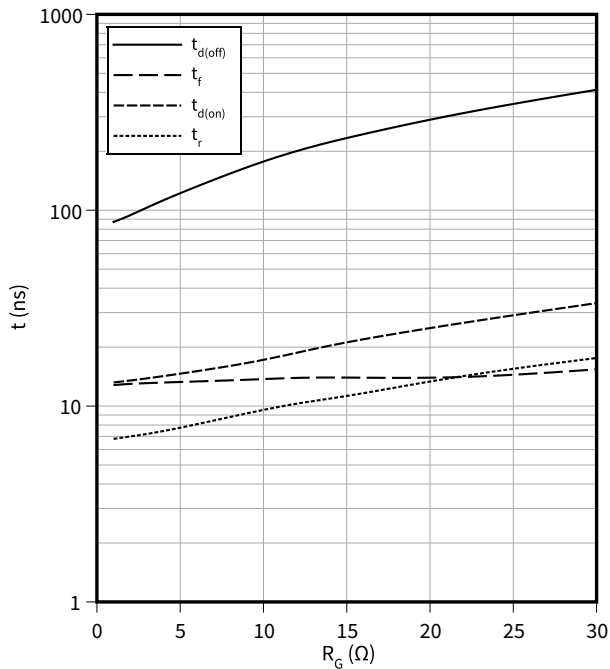

Typical switching times as a function of junction temperature

$$t = f(T_{vj})$$


$I_C = 25 \text{ A}$, $V_{CC} = 400 \text{ V}$, $V_{GE} = 0/15 \text{ V}$, $R_G = 9 \text{ Ω}$

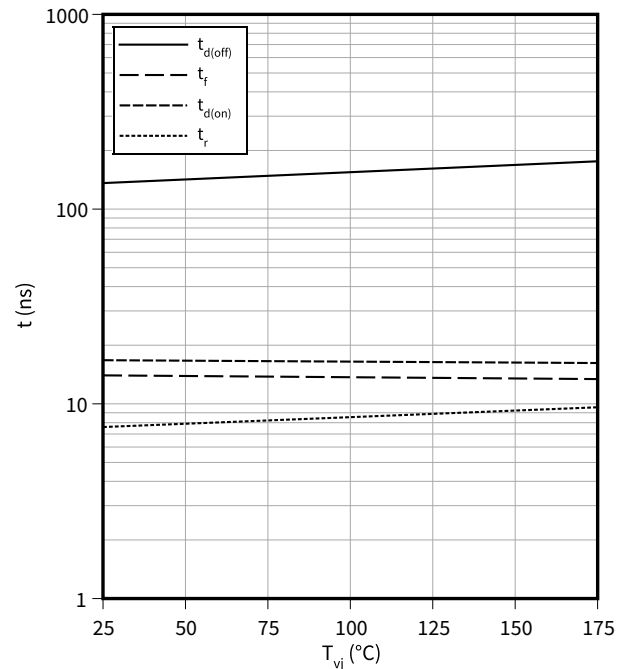

Typical switching energy losses as a function of collector current

$$E = f(I_C)$$


$V_{CC} = 400 \text{ V}$, $T_{vj} = 150 \text{ °C}$, $V_{GE} = 0/15 \text{ V}$, $R_G = 9 \text{ Ω}$

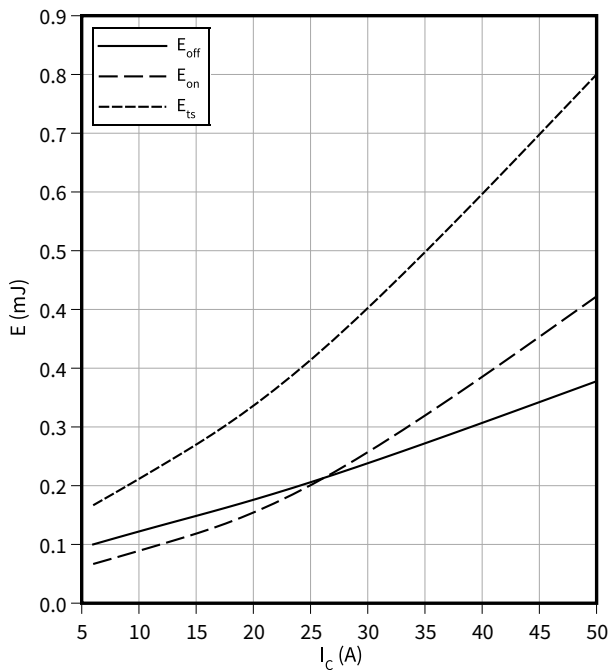

Typical switching energy losses as a function of gate resistor

$$E = f(R_G)$$


$I_C = 25 \text{ A}$, $V_{CC} = 400 \text{ V}$, $T_{vj} = 150 \text{ °C}$, $V_{GE} = 0/15 \text{ V}$

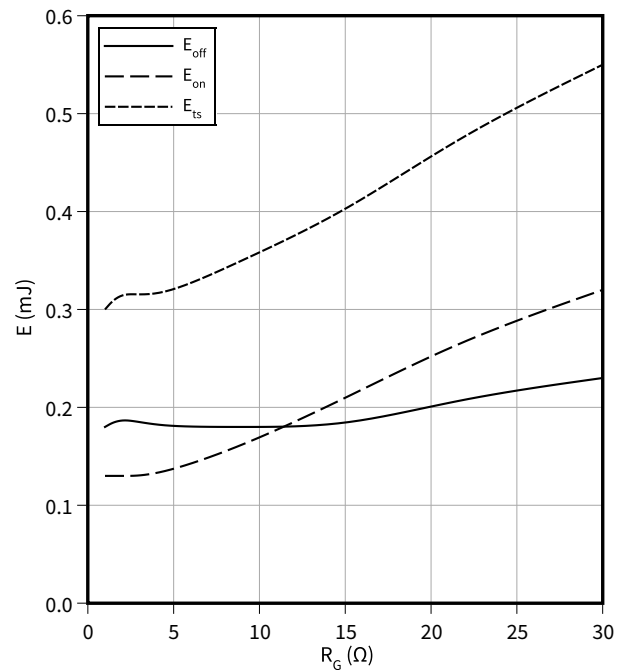

4 Characteristics diagrams


Typical switching energy losses as a function of junction temperature

$E = f(T_{vj})$
 $I_C = 25\text{ A}$, $V_{CC} = 400\text{ V}$, $V_{GE} = 0/15\text{ V}$, $R_G = 9\ \Omega$

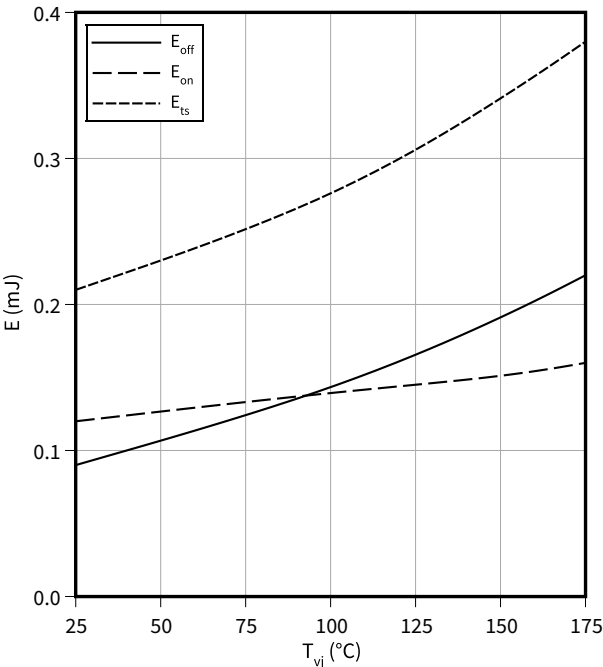


Typical gate charge

$V_{GE} = f(Q_G)$
 $I_C = 50\text{ A}$

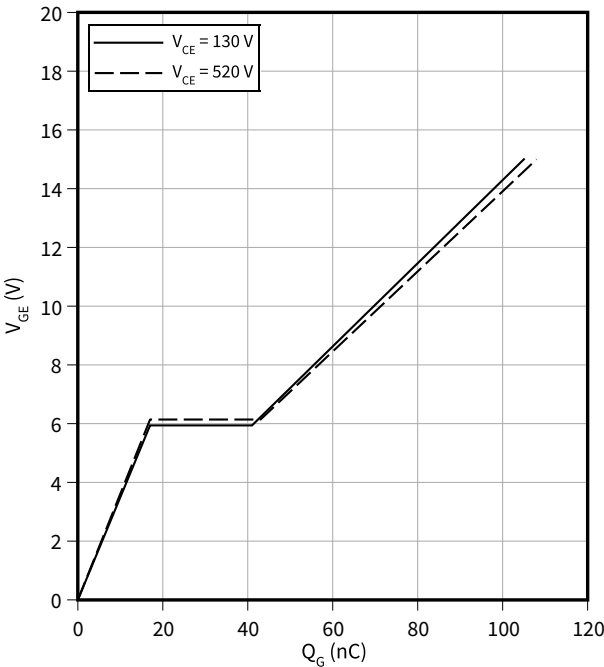


Typical capacitance as a function of collector-emitter voltage

$C = f(V_{CE})$
 $f = 100\text{ kHz}$, $V_{GE} = 0\text{ V}$

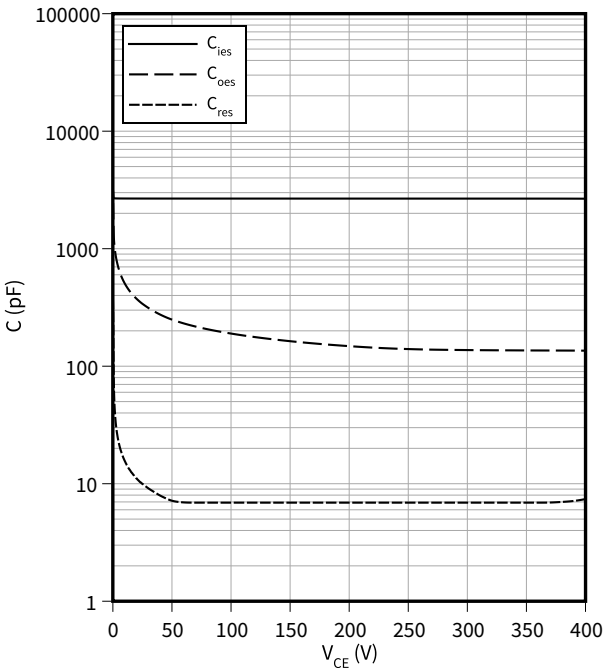

IGBT transient thermal impedance as a function of pulse width


$Z_{th(j-c)} = f(t_p)$
 $D = t_p/T$

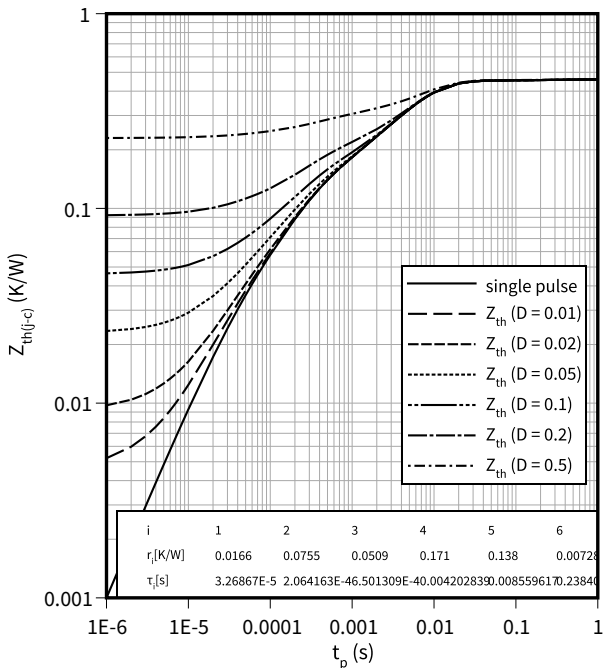

4 Characteristics diagrams


Diode transient thermal impedance as a function of pulse width

$Z_{th(j-c)} = f(t_p)$
 $D = t_p/T$

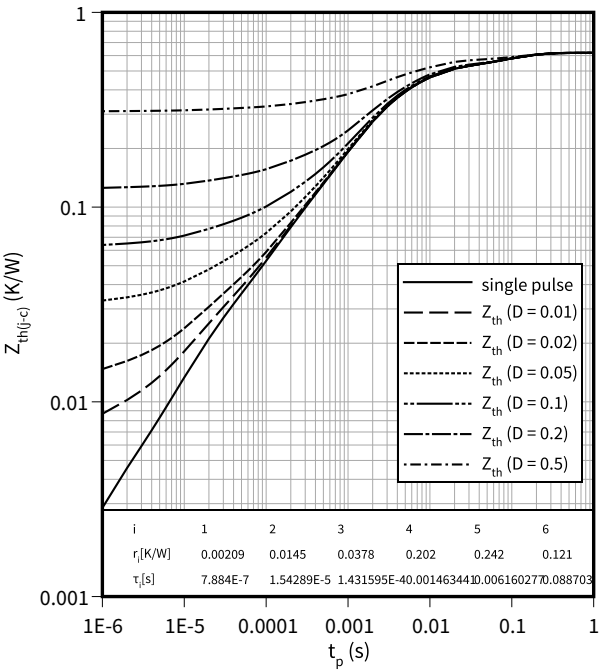


Typical diode forward current as a function of forward voltage

$I_F = f(V_F)$

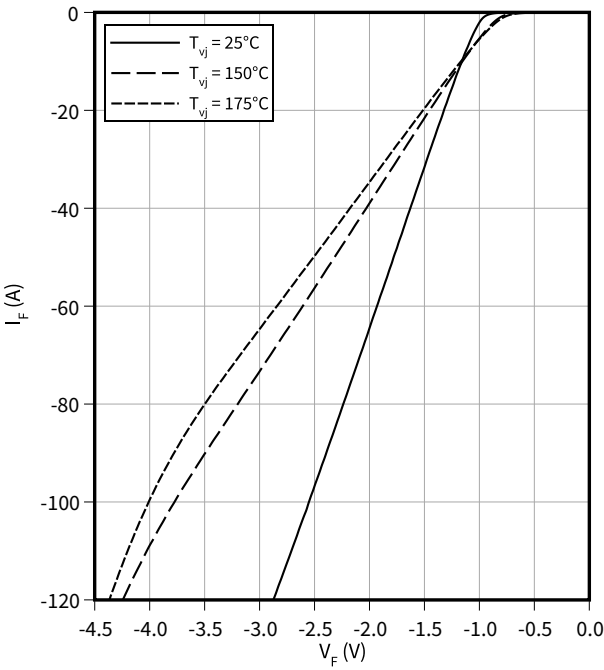

Typical diode forward voltage as a function of junction temperature

$V_F = f(T_{vj})$

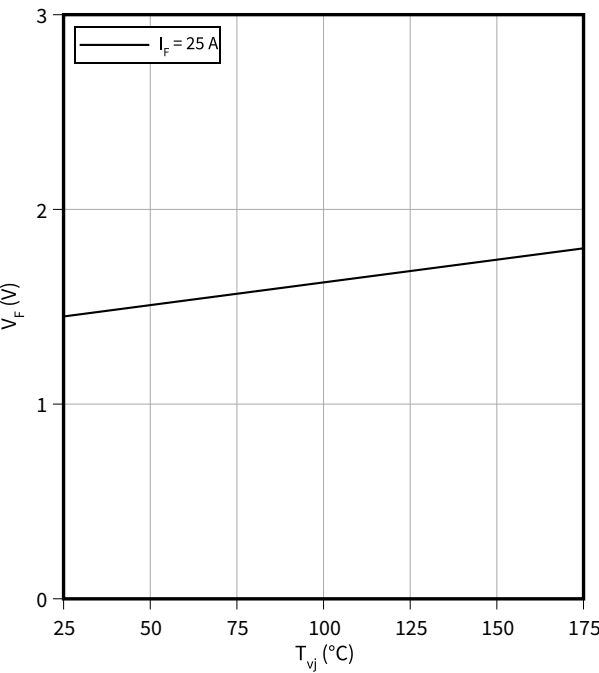

5 Package outlines

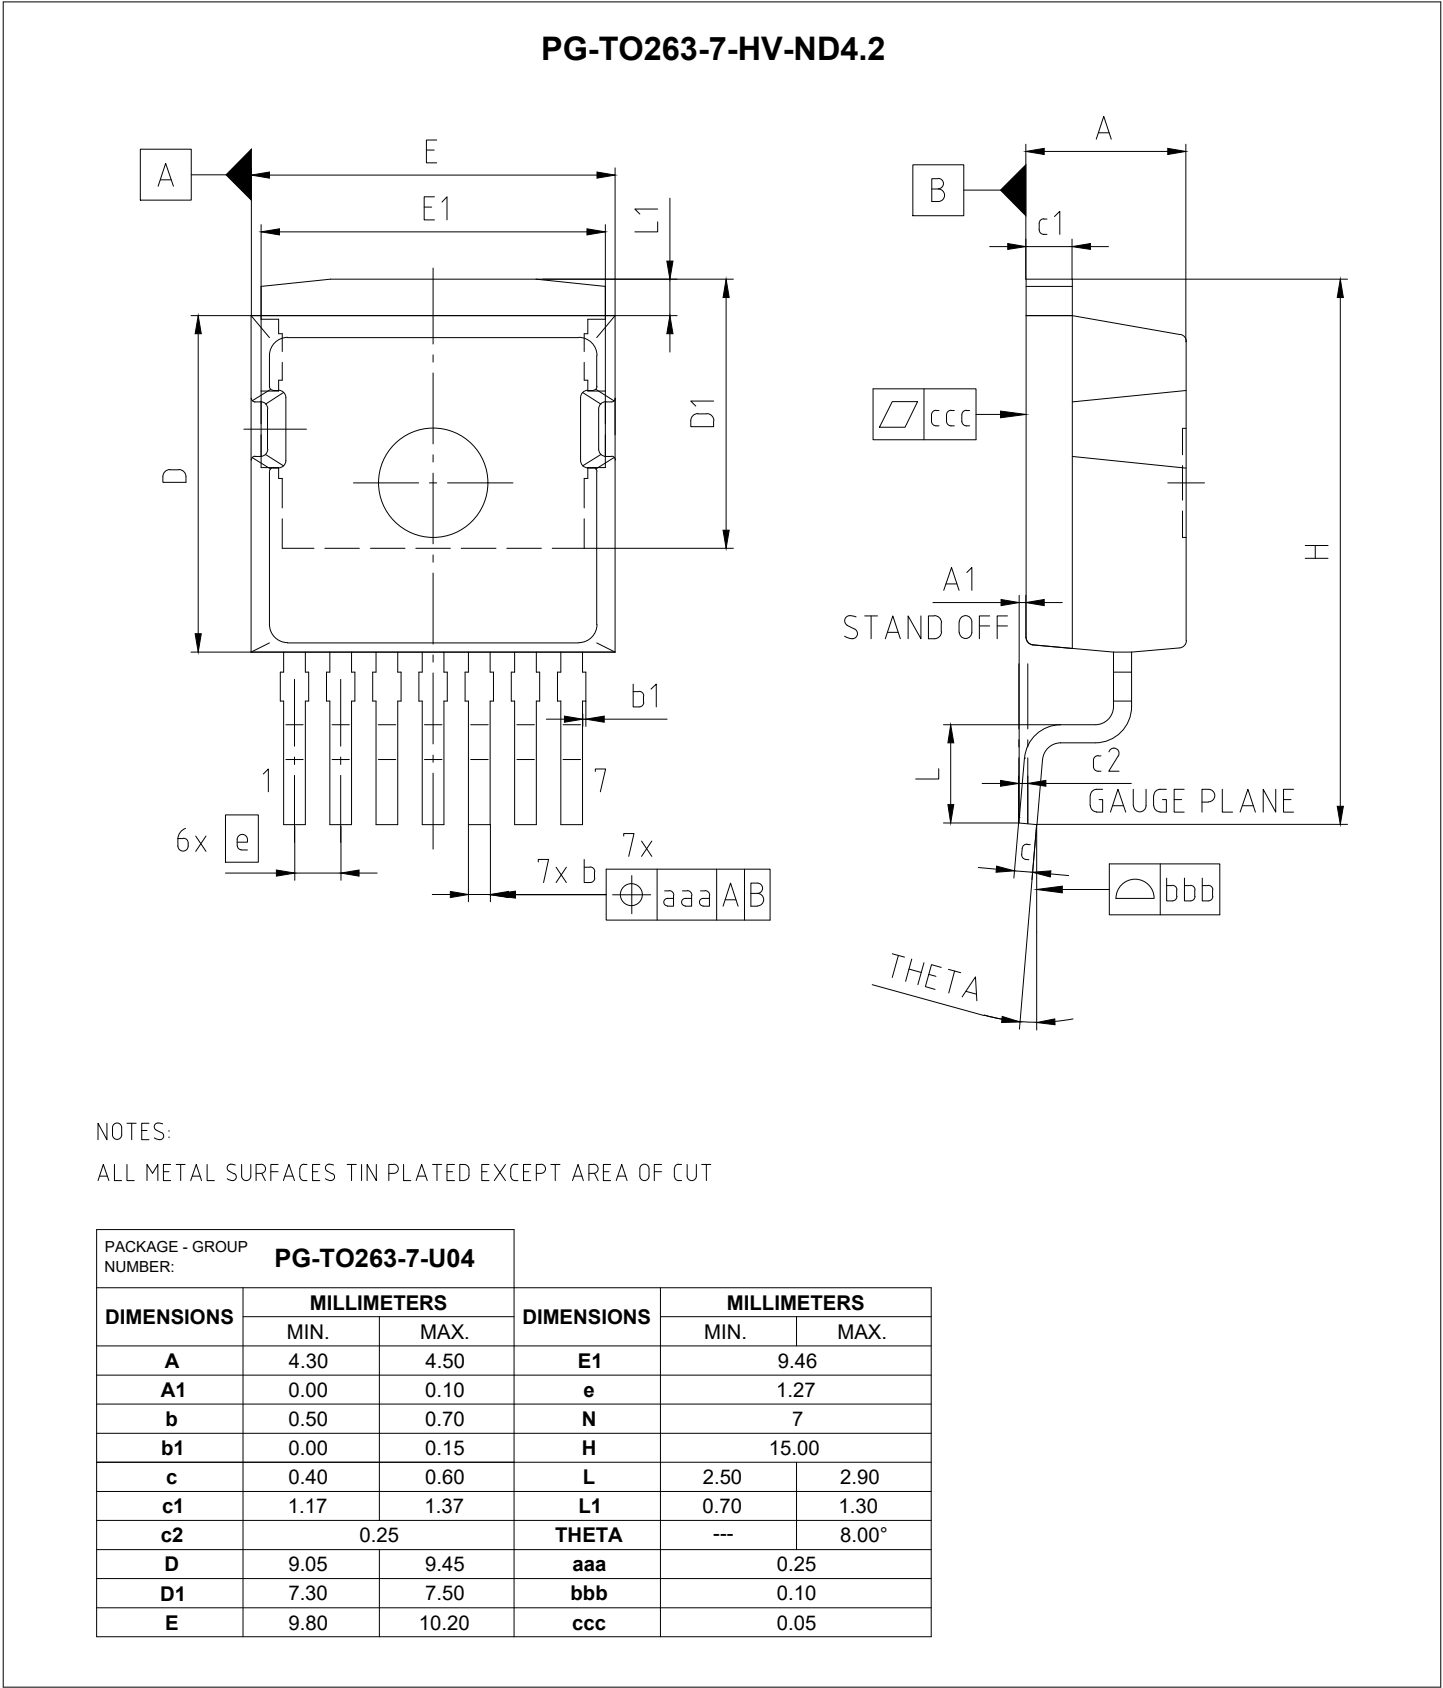


Figure 1

Figure A. Definition of switching times

Figure B. Definition of switching losses

Figure C. Definition of diode switching characteristics

Figure D. Thermal equivalent circuit

Figure E. **Dynamic test circuit**
Parasitic inductance L_{σ} ,
parasitic capacitor C_{σ} ,
relief capacitor C_r ,
(only for ZVT switching)

Revision history

Document revision	Date of release	Description of changes
0.10	2022-03-17	Target datasheet
0.20	2023-05-10	Preliminary datasheet
0.30	2023-06-07	Preliminary datasheet
0.40	2023-08-24	Update Marking Update $I_f(V_f)$ graph Update graph scaling and test conditions
1.00	2023-10-24	Final datasheet

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2023-10-26

Published by

Infineon Technologies AG
81726 Munich, Germany

© 2023 Infineon Technologies AG
All Rights Reserved.

Do you have a question about any aspect of this document?

Email: erratum@infineon.com

Document reference
IFX-ABD083-005

Important notice

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenhheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

Warnings

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Infineon](#) manufacturer:

Other Similar products are found below :

[076295C](#) [111-4190PBF](#) [1EBN1001AEXUMA1](#) [1ED020I12-B2](#) [1ED020I12B2XUMA1](#) [1ED020I12-BT](#) [1ED020I12BTXUMA1](#) [1ED020I12-F](#) [1ED020I12-F2](#) [1ED020I12F2XUMA1](#) [1ED020I12FA2](#) [1ED020I12FA2XUMA2](#) [1ED020I12-FT](#) [1ED020I12FTA](#) [1ED020I12FTAXUMA2](#) [1ED21271S65FXUMA1](#) [1ED2127S65FXUMA1](#) [1ED21471S65FXUMA1](#) [1ED2147S65FXUMA1](#) [1ED3120MC12HXUMA1](#) [1ED3120MU12HXUMA1](#) [1ED3121MC12HXUMA1](#) [1ED3121MU12HXUMA1](#) [1ED3122MC12HXUMA1](#) [1ED3122MU12HXUMA1](#) [1ED3123MC12HXUMA1](#) [1ED3123MU12HXUMA1](#) [1ED3124MU12FXUMA1](#) [1ED3124MU12HXUMA1](#) [1ED3125MU12FXUMA1](#) [1ED3131MC12HXUMA1](#) [1ED3131MU12HXUMA1](#) [1ED3140MU12FXUMA1](#) [1ED3141MU12FXUMA1](#) [1ED3142MU12FXUMA1](#) [1ED3240MC12HXUMA1](#) [1ED3241MC12HXUMA1](#) [1ED3250MC12HXUMA1](#) [1ED3323MC12NXUMA1](#) [1ED3431MC12MXUMA1](#) [1ED3431MU12MXUMA1](#) [1ED3461MC12MXUMA1](#) [1ED3461MU12MXUMA1](#) [1ED3491MC12MXUMA1](#) [1ED3860MC12MXUMA1](#) [1ED3860MU12MXUMA1](#) [1ED3890MC12MXUMA1](#) [1ED3890MU12MXUMA1](#) [1ED44173N01BXTSA1](#) [1ED44176N01FXUMA1](#)