Final datasheet
CoolSiC™ Automotive MOSFET 1200 V in HDSOP-22-3 package



Halogen-free

AEC Qualified

Lead-free

RoHS

Features
- V_{DSS} = 1200 V at T_{vj} = -55...175°C
- I_{DDC} = 61 A at T_C = 25°C
- $R_{DS(on)}$ = 40 mΩ at V_{GS} = 20 V, T_{vj} = 25°C
- New performance-optimized chip technology (Gen1p) with improved R_{DSon}* A
- Best in class switching energy for lower switching losses and reduced cooling efforts
- Lowest device capacitances for higher switching speeds and higher power density
- A combination of low C_{rss}/C_{iss} ratio and high $V_{GS(th)}$ to avoid parasitic turn-on and enable unipolar gate driving
- Reduced total gate charge Q_G for lower driving power and losses
- Increased recommended turn-on voltage ($V_{GS(on)}$ = 20 V) for lower $R_{DS(on)}$
- .XT die attach technology for best in class thermal performance
- Low package stray inductance for faster and cleaner switching
- Drive (Kelvin) Source pin for better gate control and reduced switching losses
- Creepage distance > 4.75 mm fitting $V_{rms(max)}$ > 950 V based on IEC60664 for material group I, pollution degree 2
- SMT package for automated assembly and reduced system costs
- Low R_{th} Top-Side Cooled package for best thermal performance and power density

Potential applications
- On-board charger
- DC/DC converter
- E-fuse
- Auxiliary drives

Product validation
- Qualified for Automotive Applications. Product Validation according to AEC-Q100/101

Description
Pin definition:
- Pin 1 - Gate
- Pin 2 - Drive Source
- Pin 3...11 - Power Source
- Pin 12...22, TAB - Drain

Note: the drive source and power source pins are not exchangeable, their exchange might lead to malfunction



Type	Package	Marking
AIMCQ120R040M1T	PG-HDSOP-22-3	12A040M1

Table of contents

	Description	1
	Features	1
	Potential applications	1
	Product validation	1
	Table of contents	2
1	**Package**	3
2	**MOSFET**	3
3	**Body diode (MOSFET)**	5
4	**Characteristics diagrams**	7
5	**Package outlines**	13
6	**Testing conditions**	14
	Revision history	15
	Disclaimer	16

1 Package

Table 1 Characteristic values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Storage temperature	T_{stg}		-55		150	°C
Soldering temperature	T_{sold}				260	°C
MOSFET/body diode thermal resistance, junction-case[1)]	$R_{th(j-c)}$			0.34	0.44	K/W

1) not subject to production test - verified by design/characterization

2 MOSFET

Table 2 Maximum rated values

Parameter	Symbol	Note or test condition		Values	Unit
Drain-source voltage[1)]	V_{DSS}	T_{vj} = -55...175 °C		1200	V
Continuous DC drain current for $R_{th(j-c,max)}$, limited by $T_{vj(max)}$ [2)]	I_{DDC}	V_{GS} = 20 V	T_c = 25 °C	61	A
			T_c = 100 °C	43	
Peak drain current, t_p limited by $T_{vj(max)}$ [2)]	I_{DM}	V_{GS} = 20 V		155	A
Gate-source voltage, max. transient voltage[3)]	V_{GS}	$t_p \leq 0.5$ µs, $D < 0.01$		-10/25	V
Gate-source voltage, max. static voltage[3)]	V_{GS}			-5/23	V
Avalanche energy, single pulse	E_{AS}	I_D = 12.5 A, V_{DD} = 50 V, L = 3.46 mH		269	mJ
Power dissipation, limited by $T_{vj(max)}$ [2)]	P_{tot}		T_c = 25 °C	341	W
			T_c = 100 °C	170	

1) tested at Tvj=25°C, verified by design/characterization over full temperature range
2) not subject to production test - verified by design/characterization
3) **Important note:** The selection of positive and negative gate-source voltages impacts the long-term behavior of the device. The design guidelines described in Application Note AN2018-09 must be considered to ensure sound operation of the device over the planned lifetime.

Table 3 Recommended values

Parameter	Symbol	Note or test condition	Values	Unit
Recommended turn-on gate voltage	$V_{GS(on)}$		20	V
Recommended turn-off gate voltage	$V_{GS(off)}$		0	V

Table 4 Characteristic values

Parameter	Symbol	Note or test condition		Values			Unit
				Min.	Typ.	Max.	
Drain-source on-state resistance	$R_{DS(on)}$	I_D = 20 A	T_{vj} = 25 °C, $V_{GS(on)}$ = 20 V		40	50	mΩ
			T_{vj} = 100 °C, $V_{GS(on)}$ = 20 V		56		
			T_{vj} = 175 °C, $V_{GS(on)}$ = 20 V		80		
			T_{vj} = 25 °C, $V_{GS(on)}$ = 18 V		44		
Gate-source threshold voltage	$V_{GS(th)}$	I_D = 6.4 mA, V_{DS} = V_{GS} (tested after 1 ms pulse at V_{GS} = 20 V)	T_{vj} = 25 °C	3.7	4.4	5.1	V
			T_{vj} = 175 °C		3.6		
Zero gate-voltage drain current	I_{DSS}	V_{DS} = 1200 V, V_{GS} = 0 V	T_{vj} = 25 °C		0.4	19	µA
			T_{vj} = 175 °C		10		
Gate leakage current	I_{GSS}	V_{DS} = 0 V	V_{GS} = 25 V			100	nA
			V_{GS} = -10 V			-100	
Forward transconductance	g_{fs}	I_D = 20 A, V_{DS} = 20 V			12.4		S
Short-circuit withstand time[1)]	t_{SC}	V_{DD} ≤ 800 V, $V_{DS,peak}$ < 1200 V, $T_{vj(start)}$ = 25 °C, $R_{G,ext}$ = 2 Ω	$V_{GS(on)}$ = 20 V		1.5		µs
			$V_{GS(on)}$ = 18 V		2		
			$V_{GS(on)}$ = 15 V		2.5		
Internal gate resistance	$R_{G,int}$	f = 1 MHz, V_{AC} = 25 mV			3.7		Ω
Input capacitance	C_{iss}	V_{DD} = 800 V, V_{GS} = 0 V, f = 100 kHz, V_{AC} = 25 mV			1264		pF
Output capacitance	C_{oss}	V_{DD} = 800 V, V_{GS} = 0 V, f = 100 kHz, V_{AC} = 25 mV			63		pF
Reverse transfer capacitance	C_{rss}	V_{DD} = 800 V, V_{GS} = 0 V, f = 100 kHz, V_{AC} = 25 mV			3.6		pF
C_{oss} stored energy	E_{oss}	V_{DD} = 800 V, V_{GS} = 0 V, f = 100 kHz, V_{AC} = 25 mV			26		µJ
Total gate charge	Q_G	V_{DD} = 800 V, I_D = 20 A, V_{GS} = 0/20 V, turn-on pulse			43		nC
Plateau gate charge	$Q_{GS(pl)}$	V_{DD} = 800 V, I_D = 20 A, V_{GS} = 0/20 V, turn-on pulse			12		nC
Gate-to-drain charge	Q_{GD}	V_{DD} = 800 V, I_D = 20 A, V_{GS} = 0/20 V, turn-on pulse			7		nC
Turn-on delay time	$t_{d(on)}$	V_{DD} = 800 V, I_D = 20 A, V_{GS} = 0/20 V, $R_{G,ext}$ = 2 Ω, L_σ = 13 nH, diode: body diode at V_{GS} = 0 V	T_{vj} = 25 °C		8.2		ns
			T_{vj} = 175 °C		8.1		

(table continues...)

Table 4 (continued) Characteristic values

Parameter	Symbol	Note or test condition		Values			Unit
				Min.	Typ.	Max.	
Rise time	t_r	V_{DD} = 800 V, I_D = 20 A, V_{GS} = 0/20 V, $R_{G,ext}$ = 2 Ω, L_σ = 13 nH, diode: body diode at V_{GS} = 0 V	T_{vj} = 25 °C		5.5		ns
			T_{vj} = 175 °C		6.5		
Turn-off delay time	$t_{d(off)}$	V_{DD} = 800 V, I_D = 20 A, V_{GS} = 0/20 V, $R_{G,ext}$ = 2 Ω, L_σ = 13 nH, diode: body diode at V_{GS} = 0 V	T_{vj} = 25 °C		16.7		ns
			T_{vj} = 175 °C		17.8		
Fall time	t_f	V_{DD} = 800 V, I_D = 20 A, V_{GS} = 0/20 V, $R_{G,ext}$ = 2 Ω, L_σ = 13 nH, diode: body diode at V_{GS} = 0 V	T_{vj} = 25 °C		7.8		ns
			T_{vj} = 175 °C		8.1		
Turn-on energy	E_{on}	V_{DD} = 800 V, I_D = 20 A, V_{GS} = 0/20 V, $R_{G,ext}$ = 2 Ω, L_σ = 13 nH, diode: body diode at V_{GS} = 0 V	T_{vj} = 25 °C		124		µJ
			T_{vj} = 175 °C		161		
Turn-off energy	E_{off}	V_{DD} = 800 V, I_D = 20 A, V_{GS} = 0/20 V, $R_{G,ext}$ = 2 Ω, L_σ = 13 nH, diode: body diode at V_{GS} = 0 V	T_{vj} = 25 °C		34		µJ
			T_{vj} = 175 °C		35		
Total switching energy	E_{tot}	V_{DD} = 800 V, I_D = 20 A, V_{GS} = 0/20 V, $R_{G,ext}$ = 2 Ω, L_σ = 13 nH, diode: body diode at V_{GS} = 0 V	T_{vj} = 25 °C		158		µJ
			T_{vj} = 175 °C		196		
Virtual junction temperature	T_{vj}			-55		175	°C

1) not subject to production test - verified by design/characterization

***Note**: Characteristics at T_{vj} = 25°C, unless otherwise specified.*

3 Body diode (MOSFET)

Table 5 Maximum rated values

Parameter	Symbol	Note or test condition		Values	Unit
Drain-source voltage[1)]	V_{DSS}	T_{vj} = -55...175 °C		1200	V
Continuous reverse drain current for $R_{th(j-c,max)}$, limited by $T_{vj(max)}$ [2)]	I_{SDC}	V_{GS} = 0 V	T_c = 25 °C	45	A
			T_c = 100 °C	35	
Peak reverse drain current, t_p limited by $T_{vj(max)}$ [2)]	I_{SM}	V_{GS} = 0 V		45	A

1) tested at Tvj=25°C, verified by design/characterization over full temperature range

2) not subject to production test - verified by design/characterization

Table 6 Characteristic values

Parameter	Symbol	Note or test condition		Values			Unit
				Min.	Typ.	Max.	
Drain-source reverse voltage	V_{SD}	I_{SD} = 20 A, V_{GS} = 0 V	T_{vj} = 25 °C		3.9	5	V
			T_{vj} = 100 °C		3.8		
			T_{vj} = 175 °C		3.7		
MOSFET forward recovery charge	Q_{fr}	V_{DD} = 800 V, I_{SD} = 20 A, V_{GS} = 0 V, $-di_{SD}/dt$ = 2000 A/µs, Q_{fr} includes also Q_C	T_{vj} = 25 °C		196		nC
			T_{vj} = 175 °C		319		
MOSFET peak forward recovery current	I_{frm}	V_{DD} = 800 V, I_{SD} = 20 A, V_{GS} = 0 V, $-di_{SD}/dt$ = 2000 A/µs, Q_{fr} includes also Q_C	T_{vj} = 25 °C		13		A
			T_{vj} = 175 °C		16		
Virtual junction temperature	T_{vj}			-55		175	°C

4 Characteristics diagrams

Reverse bias safe operating area (RBSOA)

$I_{DS} = f(V_{DS})$

$T_{vj} \leq 175$ °C, $V_{GS} = 0/20$ V, $T_c = 25$ °C

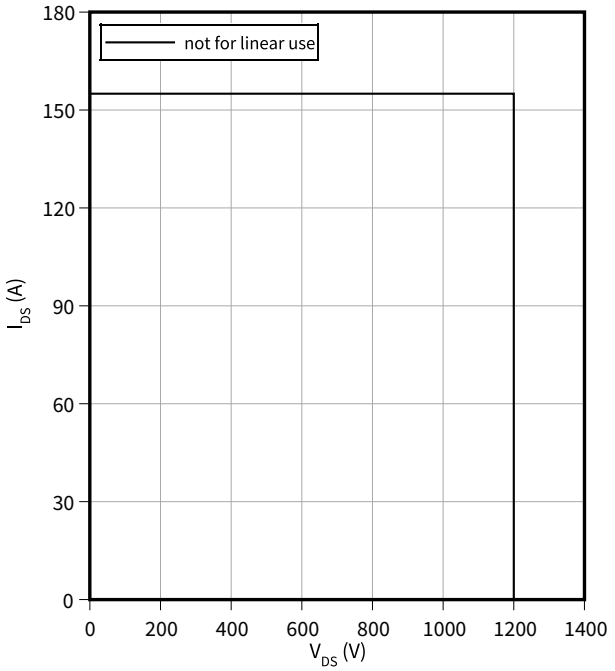

Power dissipation as a function of case temperature

$P_{tot} = f(T_c)$

$T_{vj} \leq 175$ °C

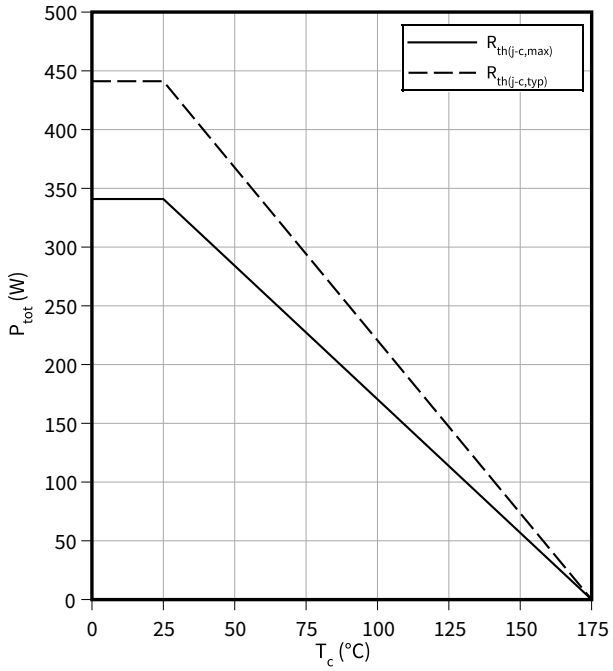

Maximum DC drain to source current as a function of case temperature

$I_{DS} = f(T_c)$

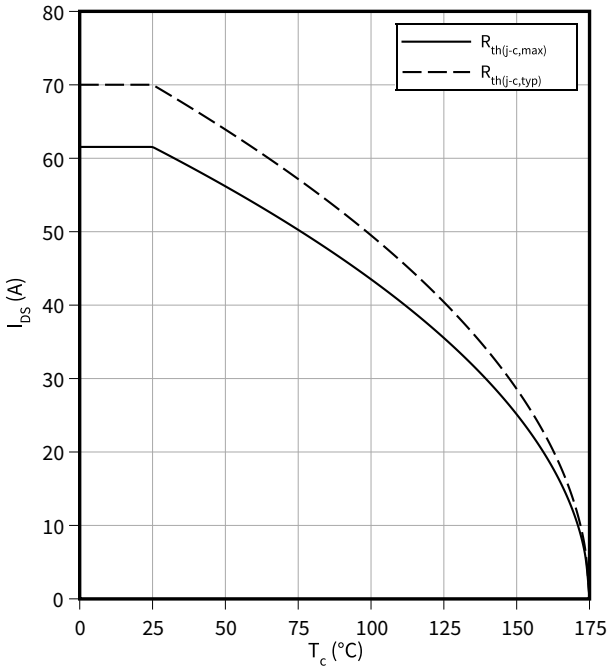

Maximum source to drain current as a function of case temperature

$I_{SD} = f(T_c)$

$V_{GS} = 0$ V

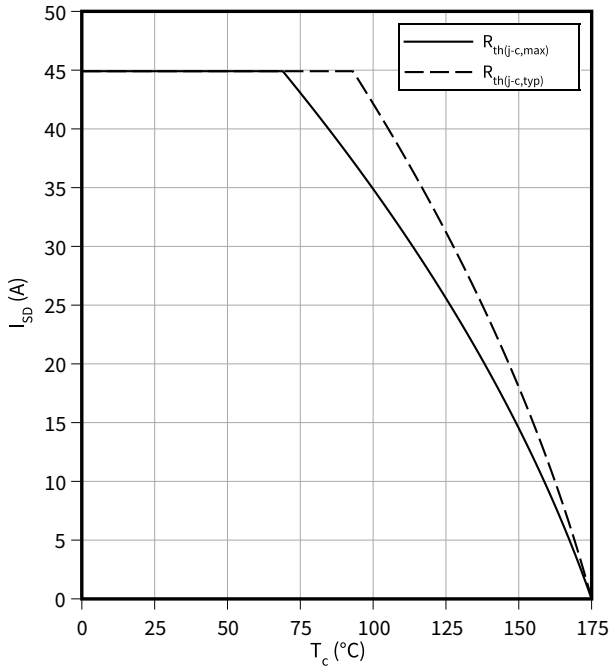

Typical transfer characteristic
$I_{DS} = f(V_{GS})$
$V_{DS} = 20$ V, $t_p = 20$ µs

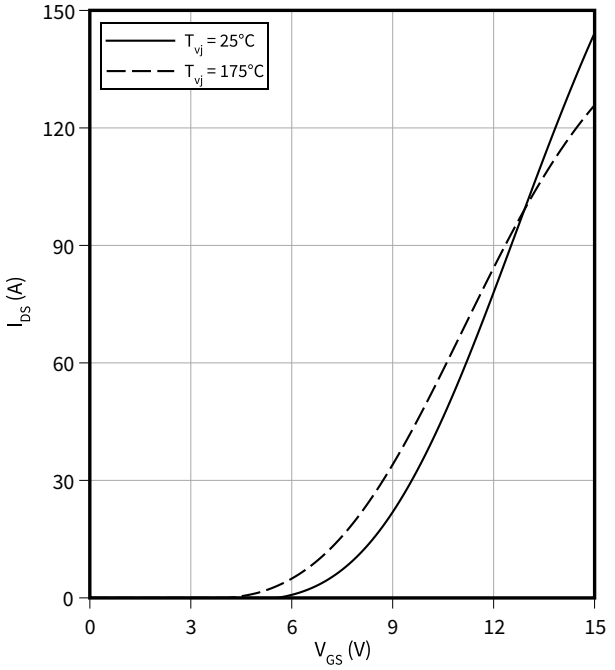

Typical gate-source threshold voltage as a function of junction temperature
$V_{GS(th)} = f(T_{vj})$
$I_D = 6.4$ mA

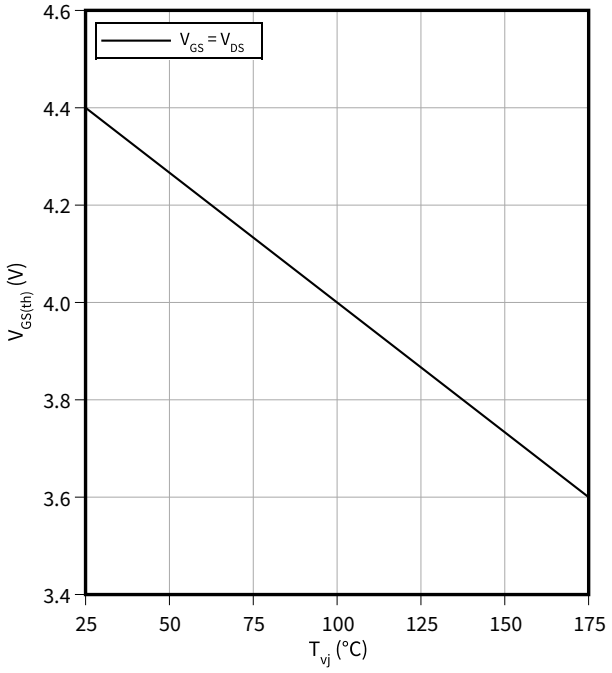

Typical output characteristic, V_{GS} as parameter
$I_{DS} = f(V_{DS})$
$T_{vj} = 25$ °C, $t_p = 20$ µs

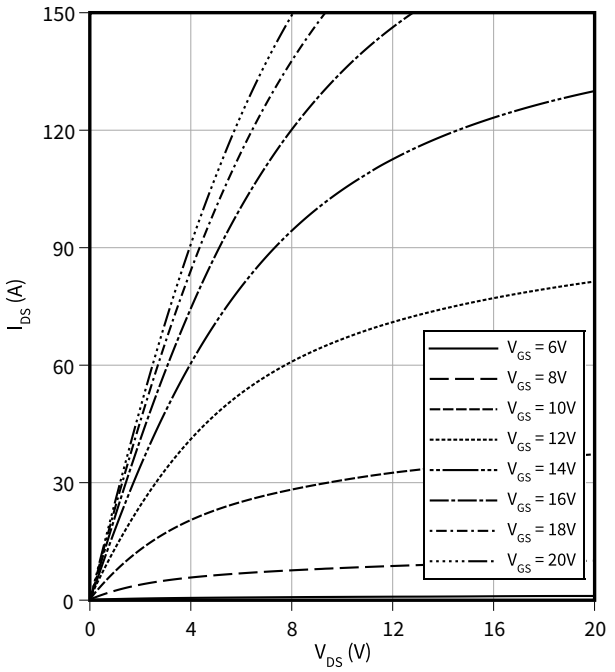

Typical output characteristic, V_{GS} as parameter
$I_{DS} = f(V_{DS})$
$T_{vj} = 175$ °C, $t_p = 20$ µs

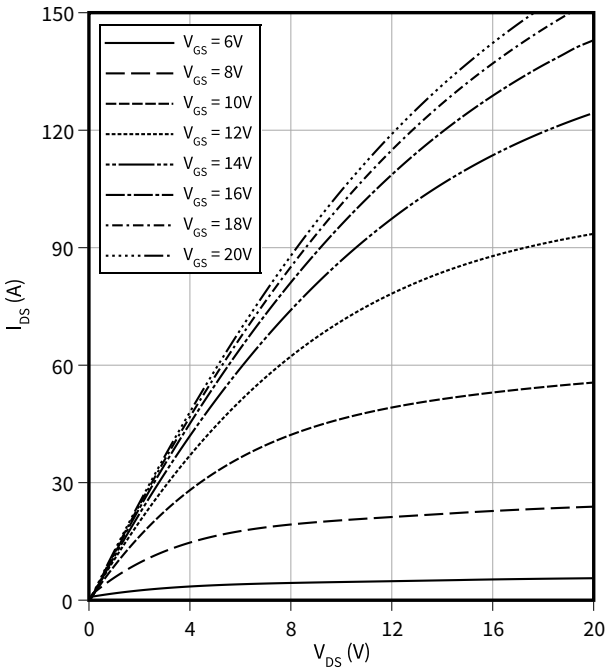

Typical on-state resistance as a function of junction temperature

$R_{DS(on)} = f(T_{vj})$

$I_D = 20$ A

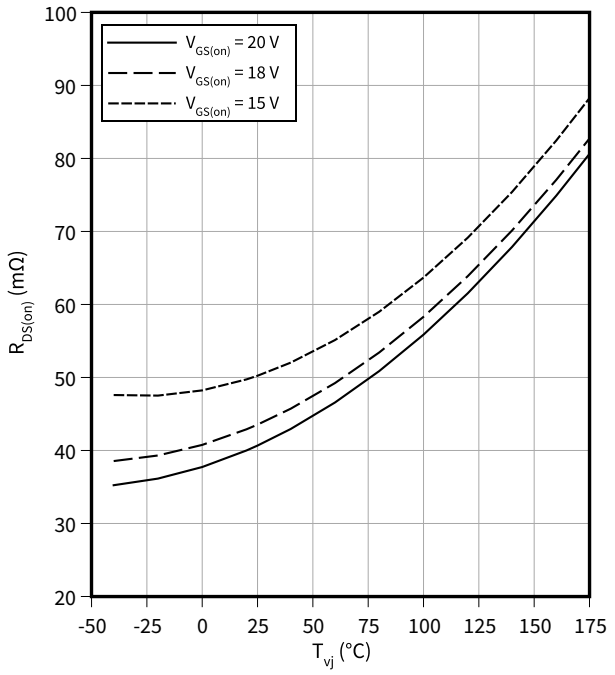

Typical gate charge

$V_{GS} = f(Q_G)$

$I_D = 20$ A, $V_{DS} = 800$ V

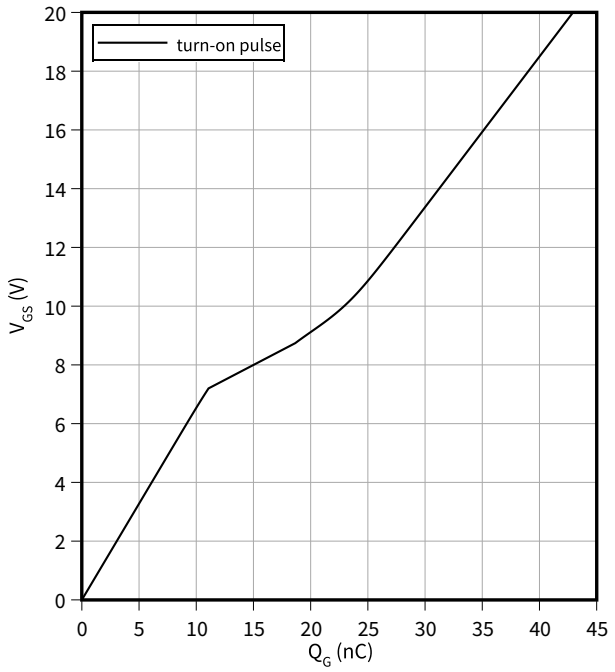

Typical capacitance as a function of drain-source voltage

$C = f(V_{DS})$

$f = 100$ kHz, $V_{GS} = 0$ V

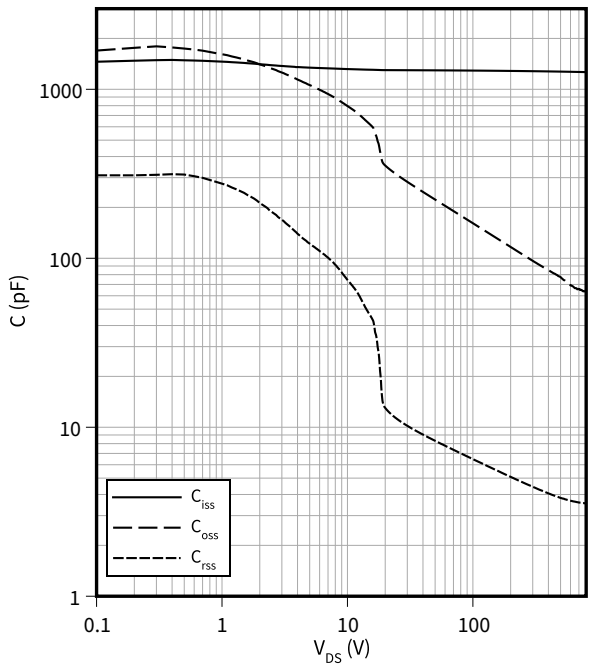

Typical C_{oss} stored energy

$E_{oss} = f(V_{DS})$

$f = 100$ kHz, $V_{GS} = 0$ V

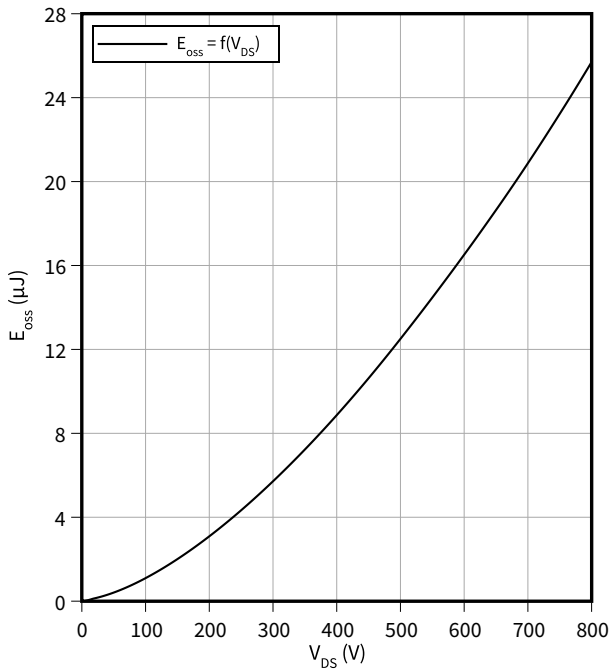

Typical reverse drain voltage as function of junction temperature

$V_{SD} = f(T_{vj})$

$I_{SD} = 20$ A, $V_{GS} = 0$ V

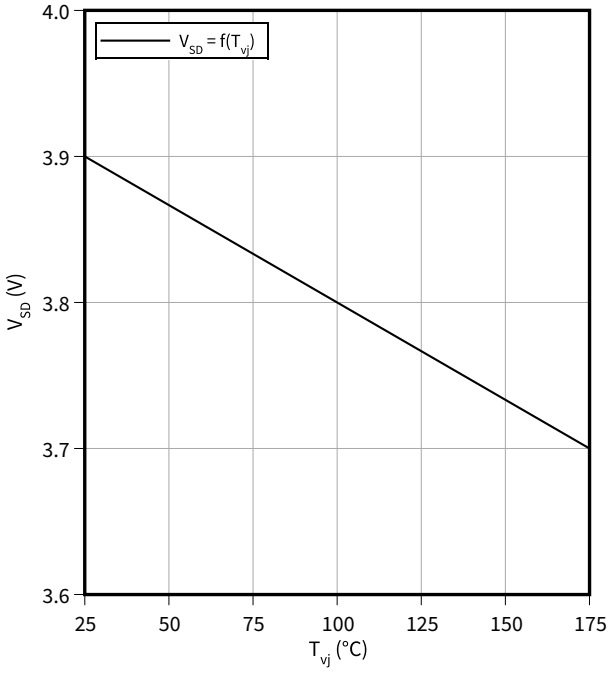

Typical reverse drain current as function of reverse drain voltage, V_{GS} as parameter

$I_{SD} = f(V_{SD})$

$T_{vj} = 25$ °C, $t_p = 20$ µs

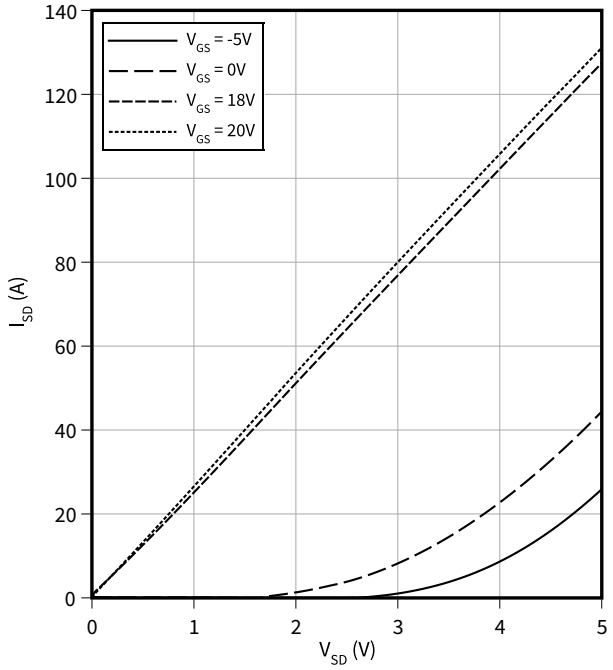

Typical reverse drain current as function of reverse drain voltage, V_{GS} as parameter

$I_{SD} = f(V_{SD})$

$T_{vj} = 175$ °C, $t_p = 20$ µs

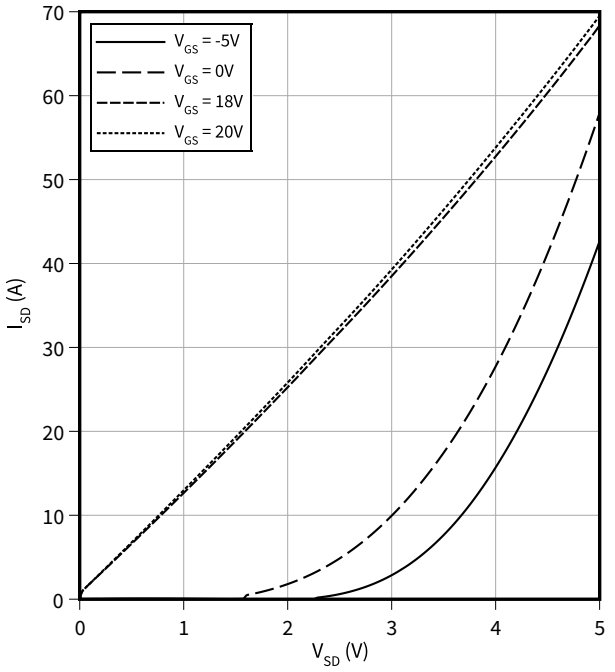

Typical switching energy as a function of junction temperature, test circuit in Fig. F, 2nd device own body diode: $V_{GS} = 0$ V

$E = f(T_{vj})$

$V_{GS} = 0/20$ V, $I_D = 20$ A, $R_{G,ext} = 2\ \Omega$, $V_{DD} = 800$ V

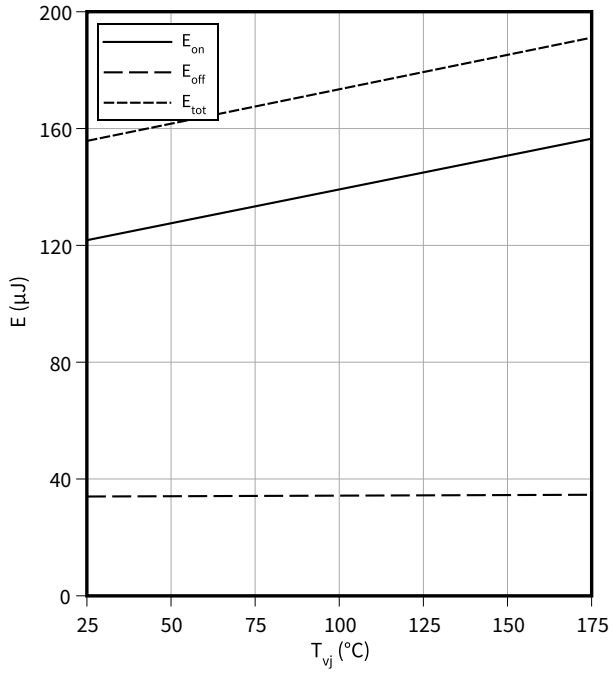

Typical switching energy as a function of drain current, test circuit in Fig. F, 2nd device own body diode: V_{GS} = 0 V

$E = f(I_D)$

V_{GS} = 0/20 V, T_{vj} = 175 °C, $R_{G,ext}$ = 2 Ω, V_{DD} = 800 V

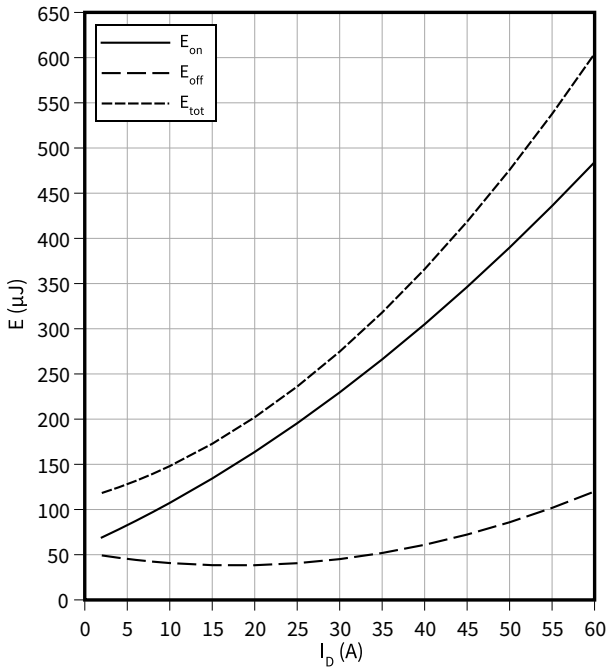

Typical switching energy as a function of drain voltage, test circuit in Fig. F, 2nd device own body diode: V_{GS} = 0 V

$E = f(V_{DS})$

V_{GS} = 0/20 V, I_D = 20 A, T_{vj} = 175 °C, $R_{G,ext}$ = 2 Ω

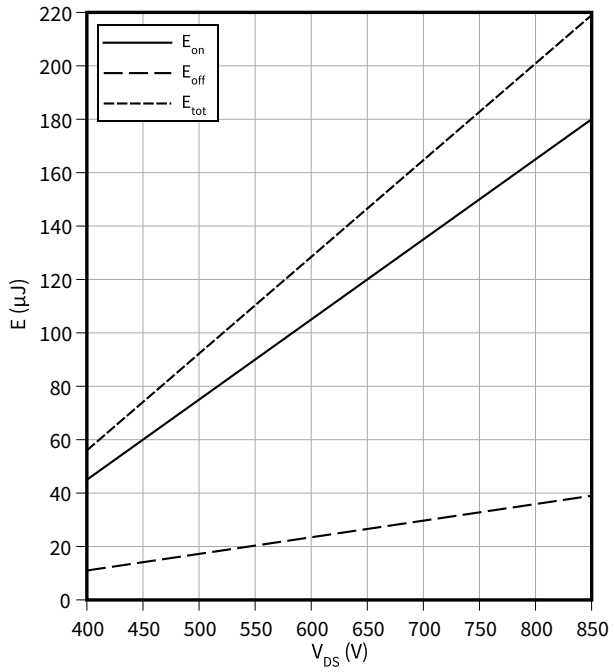

Typical switching energy as a function of gate resistance, test circuit in Fig. F, 2nd device own body diode: V_{GS} = 0 V

$E = f(R_{G,ext})$

V_{GS} = 0/20 V, I_D = 20 A, T_{vj} = 175 °C, V_{DD} = 800 V

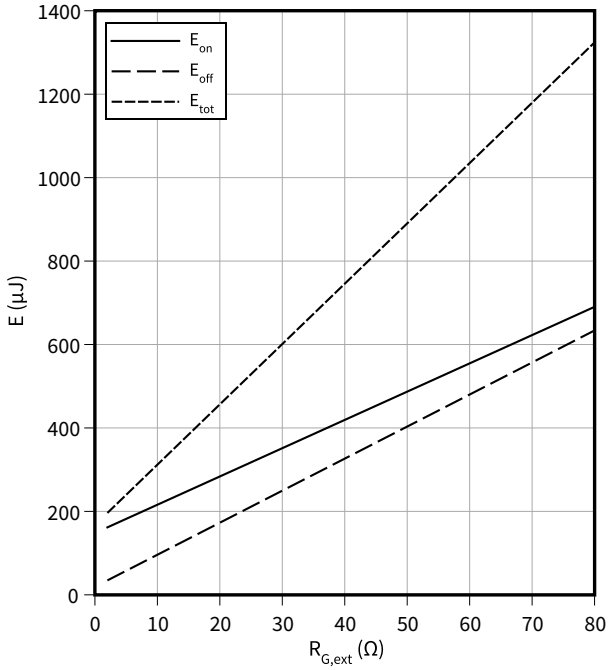

Typical switching times as a function of gate resistance

$t = f(R_{G,ext})$

I_D = 20 A, T_{vj} = 175 °C, V_{DD} = 800 V, V_{GS} = 0/20 V

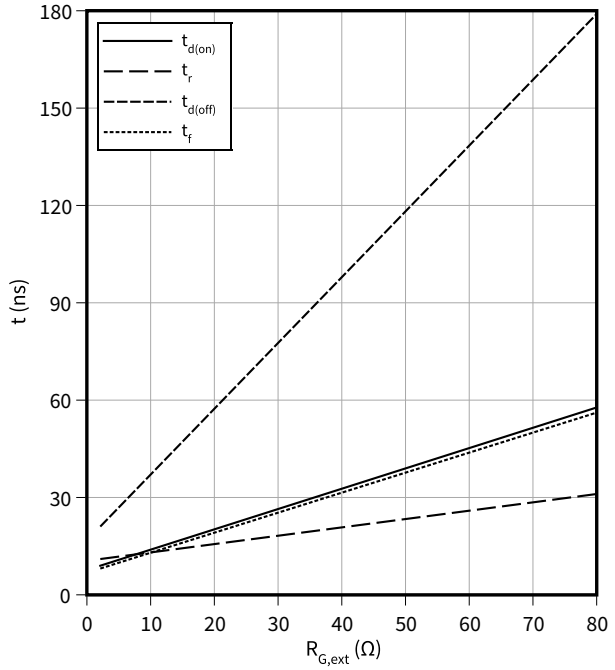

Typical MOSFET peak forward recovery current as a function of reverse drain current slope

$I_{frm} = f(-di_{SD}/dt)$

$V_{GS} = 0/20$ V, $I_{SD} = 20$ A, $V_{DD} = 800$ V

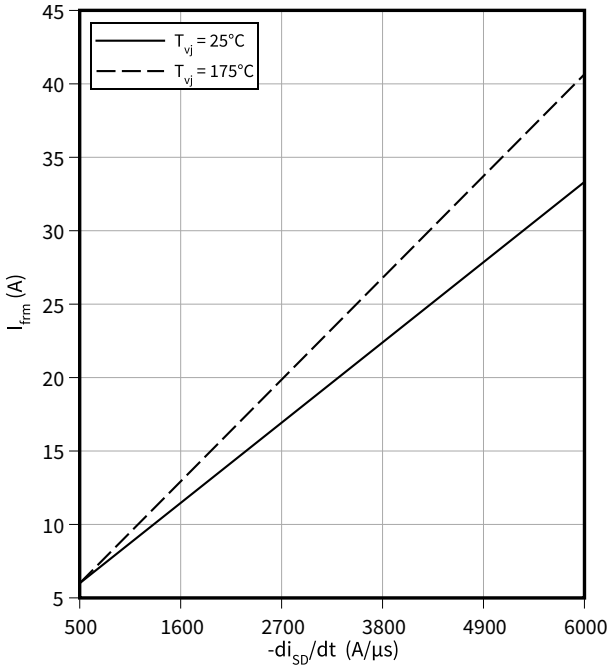

Max. transient thermal impedance (MOSFET/diode)

$Z_{th(j-c),max} = f(t_p)$

$D = t_p/T$

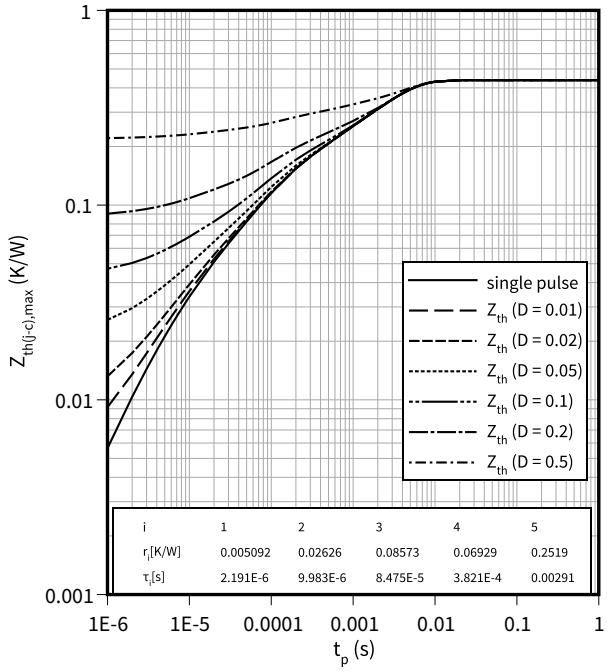

5 Package outlines

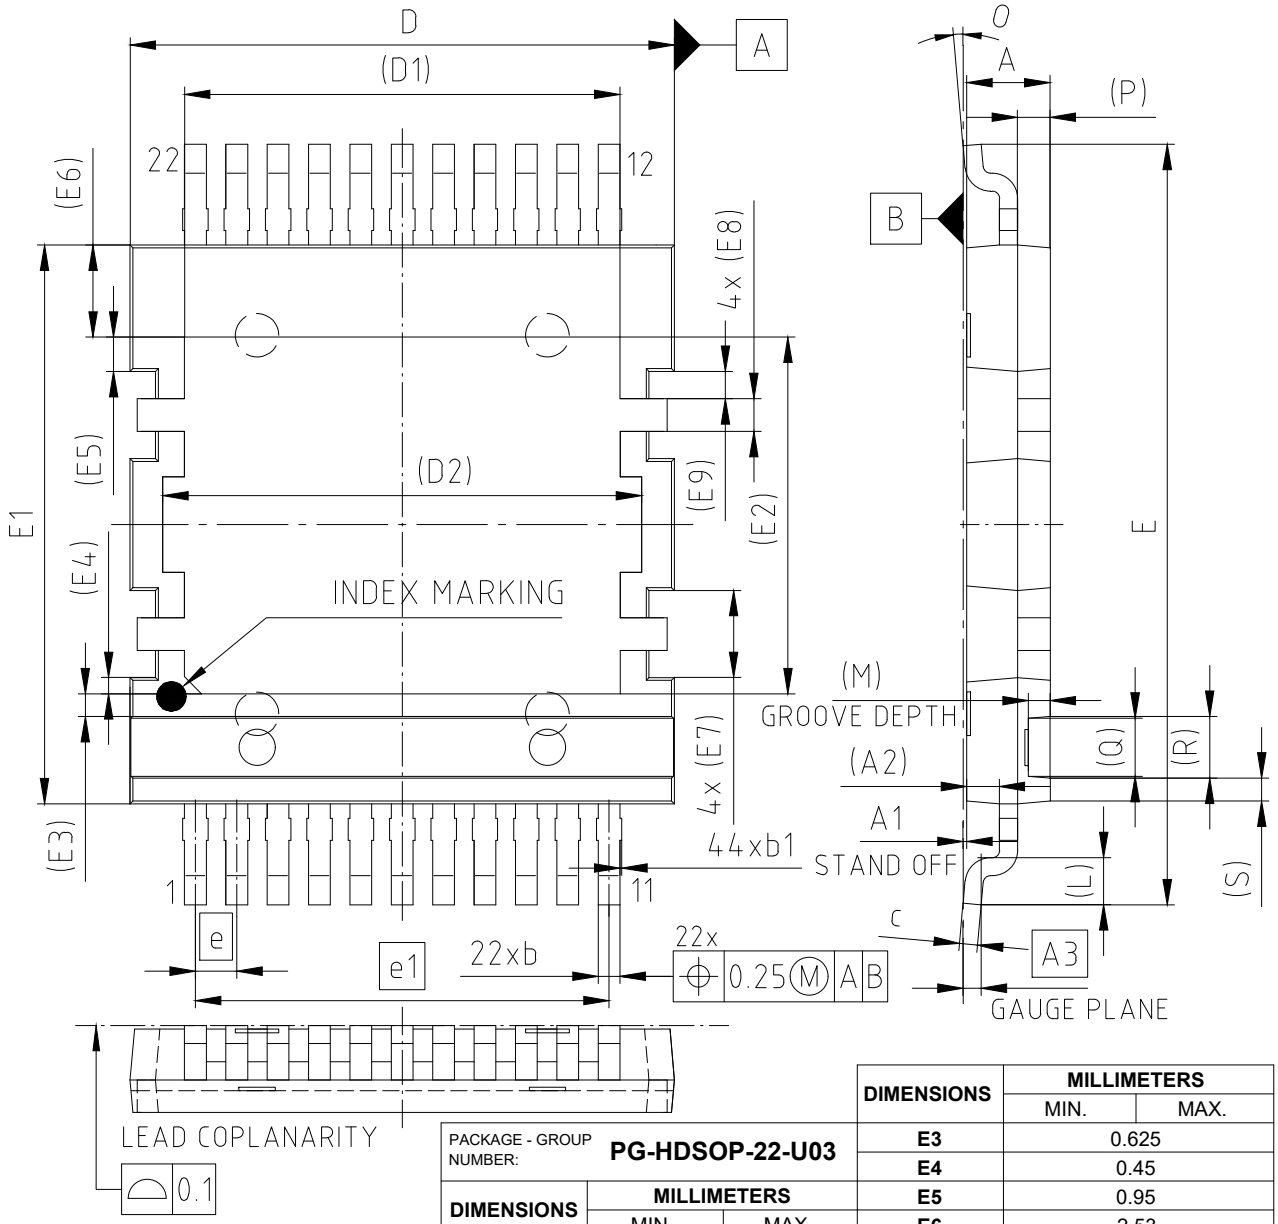

NOTES:

ALL METAL SURFACES TIN PLATED EXCEPT AREA OF CUT

DIMENSIONS DO NOT INCLUDE MOLD FLASH, PROTRUSION OR GATE BURRS

PACKAGE - GROUP NUMBER:	PG-HDSOP-22-U03	
DIMENSIONS	**MILLIMETERS**	
	MIN.	MAX.
A	2.25	2.35
A1	0.00	0.15
A2	0.90	
A3	0.50	
b	0.50	0.70
b1	---	0.15
c	0.46	0.58
D	14.90	15.10
D1	12.00	
D2	13.20	
E	20.81	21.11
E1	15.30	15.50
E2	9.83	

DIMENSIONS	**MILLIMETERS**	
	MIN.	MAX.
E3	0.625	
E4	0.45	
E5	0.95	
E6	2.53	
E7	2.40	
E8	0.90	
E9	0.75	
e	1.14	
e1	11.4	
L	1.30	
M	0.60	
N	22	
O	0°	8°
P	0.90	
Q	1.60	
R	1.70	
S	0.631	

Figure 1

6 Testing conditions

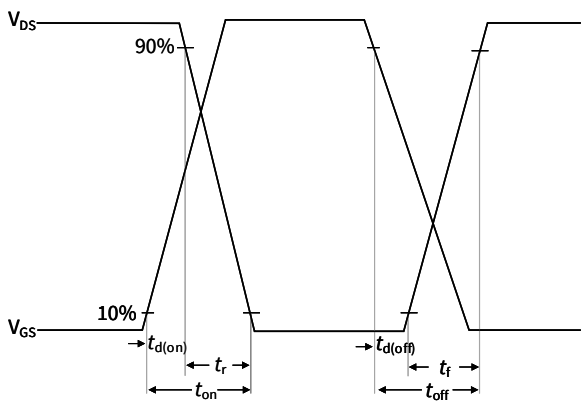

Figure A. **Definition of switching times**

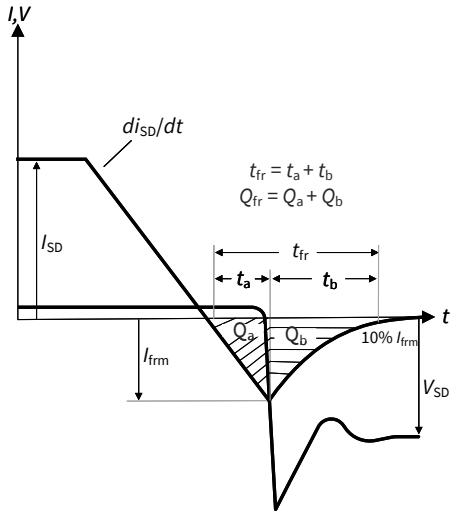

Figure B. **Definition of body diode switching characteristics**

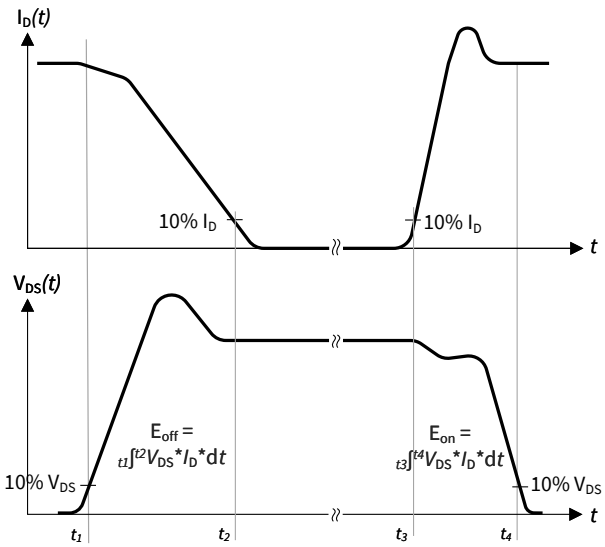

Figure C. **Definition of switching losses**

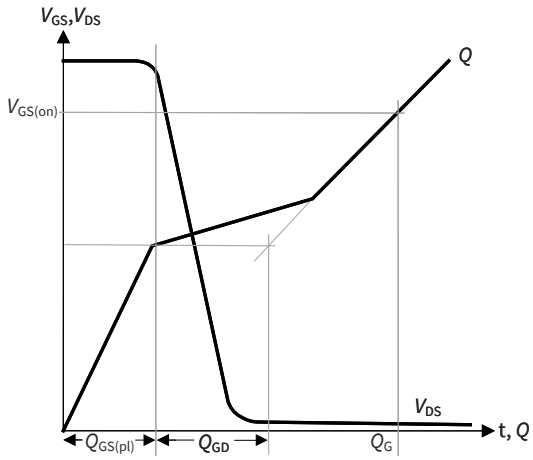

Figure D. **Definition of QGD**

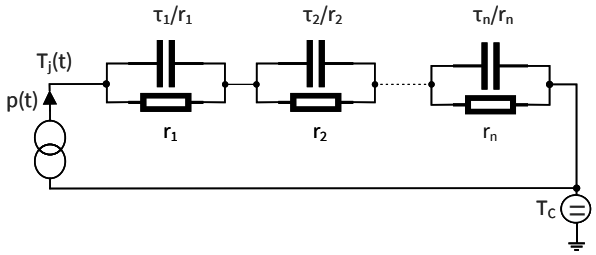

Figure E. **Thermal equivalent circuit**

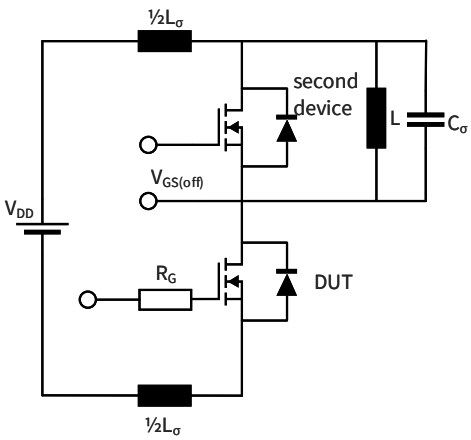

Figure F. **Dynamic test circuit**
Parasitic inductance L_σ,
Parasitic capacitor C_σ,

Figure 2

Revision history

Document revision	Date of release	Description of changes
0.10	2023-01-17	Target datasheet
0.20	2024-05-02	Preliminary datasheet
1.00	2024-07-22	Final datasheet

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2024-07-23

Published by

Infineon Technologies AG

81726 Munich, Germany

© 2024 Infineon Technologies AG

All Rights Reserved.

Do you have a question about any aspect of this document?

Email: erratum@infineon.com

Document reference
IFX-ABG490-003

Important notice

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

Warnings

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for SiC MOSFETs ***category:***

Click to view products by Infineon ***manufacturer:***

Other Similar products are found below :

ADP120N080G2 ADQ120N040BH ADR065N028AH AIMBG120R080M1XTMA1 AIMBG75R020M1HXTMA1 AIMBG75R027M1HXTMA1 AIMBG75R060M1HXTMA1 AIMBG75R090M1HXTMA1 AIMCQ120R020M1TXTMA1 AIMCQ120R030M1TXTMA1 AIMCQ120R040M1TXTMA1 AIMCQ120R060M1TXTMA1 AIMCQ120R080M1TXTMA1 AIMCQ120R120M1TXTMA1 AIMCQ120R160M1TXTMA1 AIMDQ75R020M1HXUMA1 AIMDQ75R027M1HXUMA1 AIMDQ75R090M1HXUMA1 AIMW120R035M1HXKSA1 AIMW120R045M1XKSA1 AIMW120R060M1HXKSA1 AIMW120R080M1XKSA1 AIMZA75R016M1HXKSA1 AIMZA75R020M1HXKSA1 AIMZA75R027M1HXKSA1 AIMZA75R040M1HXKSA1 AIMZA75R060M1HXKSA1 AIMZA75R090M1HXKSA1 AIMZA75R140M1HXKSA1 AIMZH120R010M1TXKSA1 AIMZH120R020M1TXKSA1 AIMZH120R030M1TXKSA1 AIMZH120R040M1TXKSA1 AIMZH120R060M1TXKSA1 AIMZH120R160M1TXKSA1 AIMZHN120R020M1TXKSA1 AIMZHN120R040M1TXKSA1 ASXM028120P C2M0025120D C2M0040120D C2M0045170D C2M0080120D C2M0160120D C2M0280120D C2M1000170J C2M1000170J-TR C3M0015065D C3M0015065K C3M0016120D C3M0016120K