

ESD166-B2-W0201


Two line, bi-directional ESD protection device, 22 V, 0.13 pF, 0201

Product description

This Infineon ESD (electrostatic discharge) protection device array has two identical elements with bi-directional and symmetric I/V characteristic and excellent clamping performance.

Feature list

- ESD / transient protection according to:
 - IEC61000-4-2 (ESD): ± 16 kV (air) / ± 13 kV (contact)
 - IEC61000-4-4 (EFT): ± 2 kV / ± 40 A (5/50 ns)
 - IEC61000-4-5 (Surge): ± 8 A (8/20 μ s)
- Bi-directional maximum working voltage: $V_{WM} = \pm 22$ V
- Line capacitance: $C_L = 0.13$ pF at $f = 1$ GHz
- Clamping voltage: $V_{cl} = 8$ V at $I_{TLP} = 16$ A with $R_{dyn} = 0.25 \Omega$
- Very low leakage current: $I_L < 0.1$ nA
- Small form factor SMD size 0201, low profile (0.58 x 0.28 x 0.15 mm³)

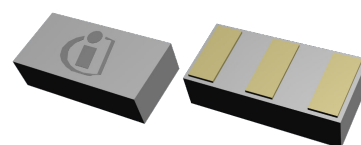

Potential applications

- USB4, USB 3.x, USB 2.0, Thunderbolt 3
- HDMI 2.1, DisplayPort 1.4

Product validation

Qualified for industrial applications according to the relevant tests of JEDEC47/20/22.

Device information

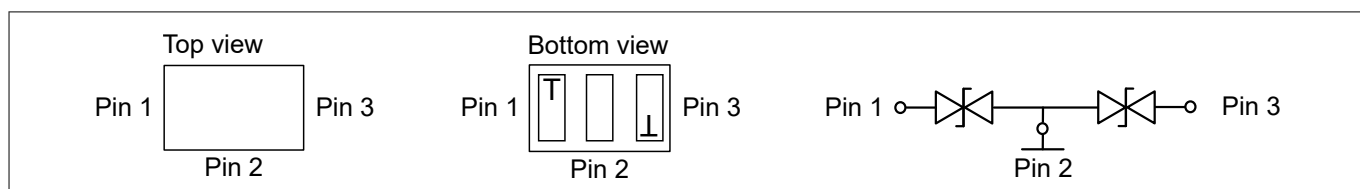


Figure 1 Pin configuration and schematic diagram

Table 1 Part information

Product name / Ordering code	Package	Pin configuration	Marking	Pieces / Reel
ESD166-B2-W0201 / ESD166B2W0201E6327XTSA1	WLL-3-1	2 line, bi-directional	T	15 k

Table of contents

	Product description	1
	Feature list	1
	Potential applications	1
	Product validation	1
	Device information	1
	Table of contents	2
1	Absolute maximum ratings	3
2	Electrical characteristics	4
3	Typical characteristic diagrams	6
4	Package information WLL-3-1	11
	References	12
5	Revision history	12
	Disclaimer	13

1 Absolute maximum ratings

1 Absolute maximum ratings

Table 2 Absolute maximum ratings at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values		Unit	Note or test condition
		Min.	Max.		
Working voltage ¹⁾	V_{WM}	-22	+22	V	
ESD discharge voltage	V_{ESD} (contact)	-13	+13	kV	Discharge network: $R = 330\ \Omega$, $C = 150\ \text{pF}$ ²⁾
	V_{ESD} (air)	-16	+16		
Peak pulse power	P_{PK}	–	+50.4	W	Stress pulse: 8/20 μs current waveform ³⁾
Peak pulse current	I_{PP}	-8	+8	A	
Operating temperature	T_{op}	-55	+125	$^\circ\text{C}$	
Storage temperature	T_{stg}	-55	+150		

Attention: Stresses above the maximum values listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. Maximum ratings are absolute ratings. Exceeding only one of these values may cause irreversible damage to the component.

¹⁾ Device snaps back to a low holding voltage, refer to application note [AN525](#) for latch-up prevention.

²⁾ Based on IEC61000-4-2.

³⁾ Based on IEC61000-4-5.

2 Electrical characteristics

2 Electrical characteristics

Note: $T_A = 25^\circ\text{C}$, unless otherwise specified. Device is electrically symmetrical.
All electrical parameters and all maximum ratings valid with middle pad (pin 2) connected to ground.

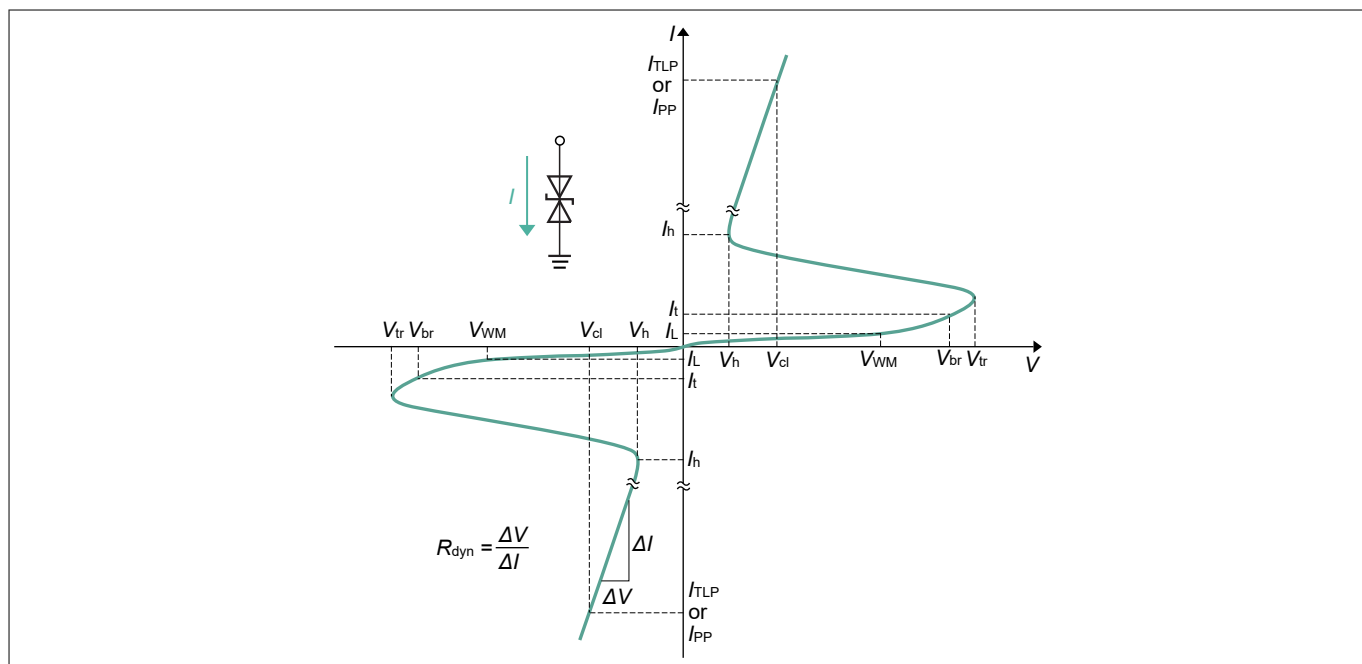


Figure 2 I/V characteristic curve

Table 3 I/V characteristic parameters

Symbol	Parameter
I_h	Holding current
I_L	Leakage current
I_{PP}	Peak pulse current, based on IEC61000-4-5
I_t	Test current
I_{TLP}	TLP current
R_{dyn}	Dynamic resistance
V_{br}	Breakdown voltage
V_{cl}	Clamping voltage
V_h	Holding voltage
V_t	Test voltage
V_{tr}	Trigger voltage
V_{WM}	Maximum working voltage

Note: For more detailed explanation of electrical parameters, refer to [1].

2 Electrical characteristics

Table 4 DC characteristics

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Breakdown voltage	V_{br}	22.8	27	34.2	V	$I_t = 1 \text{ mA}$
Trigger voltage ⁴⁾	V_{tr}	26	35	–		
Trigger current ⁴⁾	I_{tr}	–	20	–	mA	
Holding voltage ⁴⁾	V_h	–	3.5	–	V	$I = I_h$
Holding current ⁴⁾	I_h	–	10	–	mA	$V = V_h$
Leakage current	I_L	–	0.1	50	nA	$V_{WM} = 22 \text{ V}$

Table 5 AC characteristics

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Line capacitance	C_L	–	0.27	0.4	pF	$V = 0 \text{ V}, f = 1 \text{ MHz}$
		–	0.13	–		$V = 0 \text{ V}, f = 1 \text{ GHz}$
Series inductance	L_S	–	<0.1	–	nH	Extracted from S-parameters

Table 6 Protection characteristics

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Clamping voltage (TLP) ^{5) 6)}	V_{cl}	–	5.0	–	V	$I_{TLP} = 4 \text{ A}$
		–	6.0	–		$I_{TLP} = 8 \text{ A}$
		–	8.0	–		$I_{TLP} = 16 \text{ A}$
Clamping voltage (8/20 μs) ⁷⁾		–	3.2	–		$I_{PP} = 1 \text{ A}$
		–	6.3	–		$I_{PP} = 8 \text{ A}$
Dynamic resistance ⁵⁾	R_{dyn}	–	0.25	–	Ω	

⁴⁾ Verified by design.

⁵⁾ TLP parameters: $Z_0 = 50 \Omega$, $t_p = 100 \text{ ns}$, $t_r = 0.6 \text{ ns}$, averaging window 30-60 ns.

⁶⁾ Refer to application note [2].

⁷⁾ $t_p = 8/20 \mu\text{s}$. Stress pulse based on IEC61000-4-5.

3 Typical characteristic diagrams

3 Typical characteristic diagrams

Note: $T_A = 25^\circ\text{C}$, unless otherwise specified.

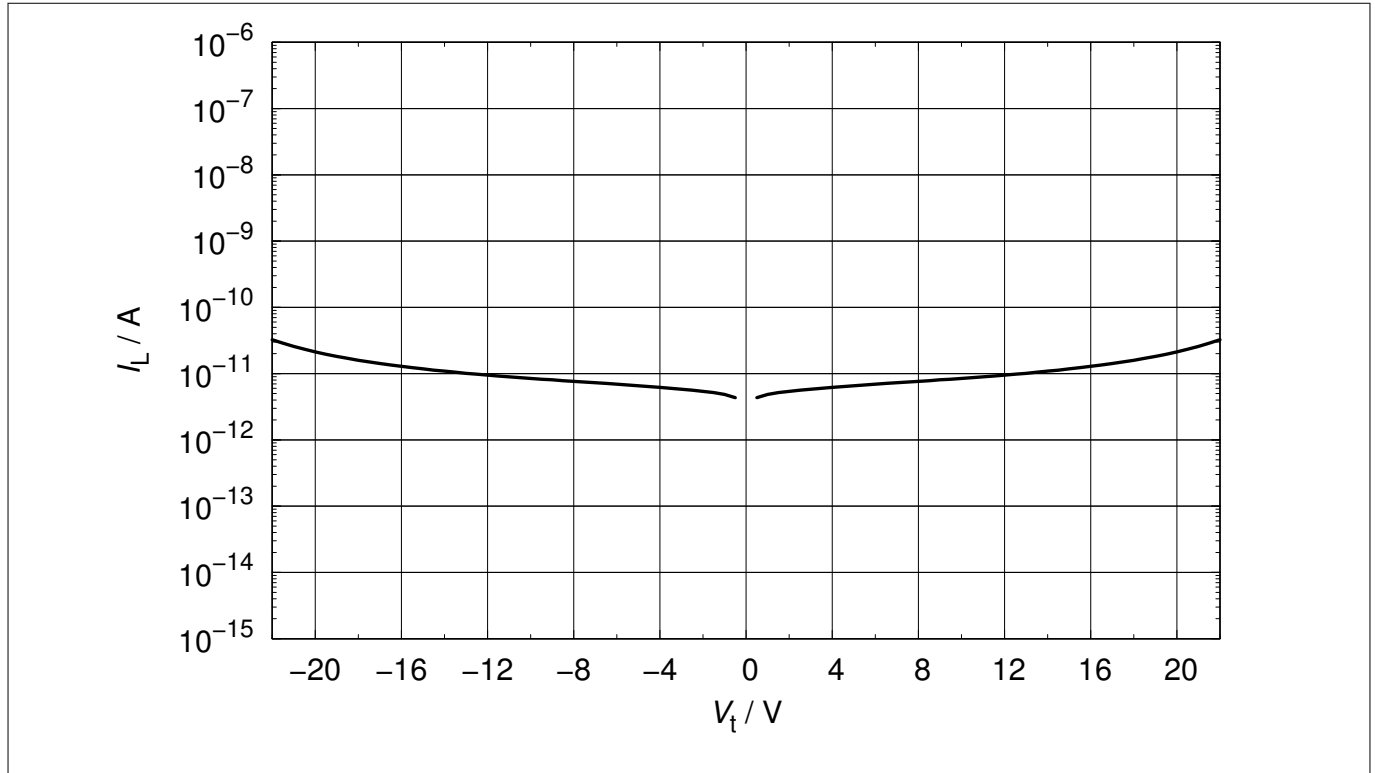


Figure 3 Leakage current: $I_L = f(V_t)$

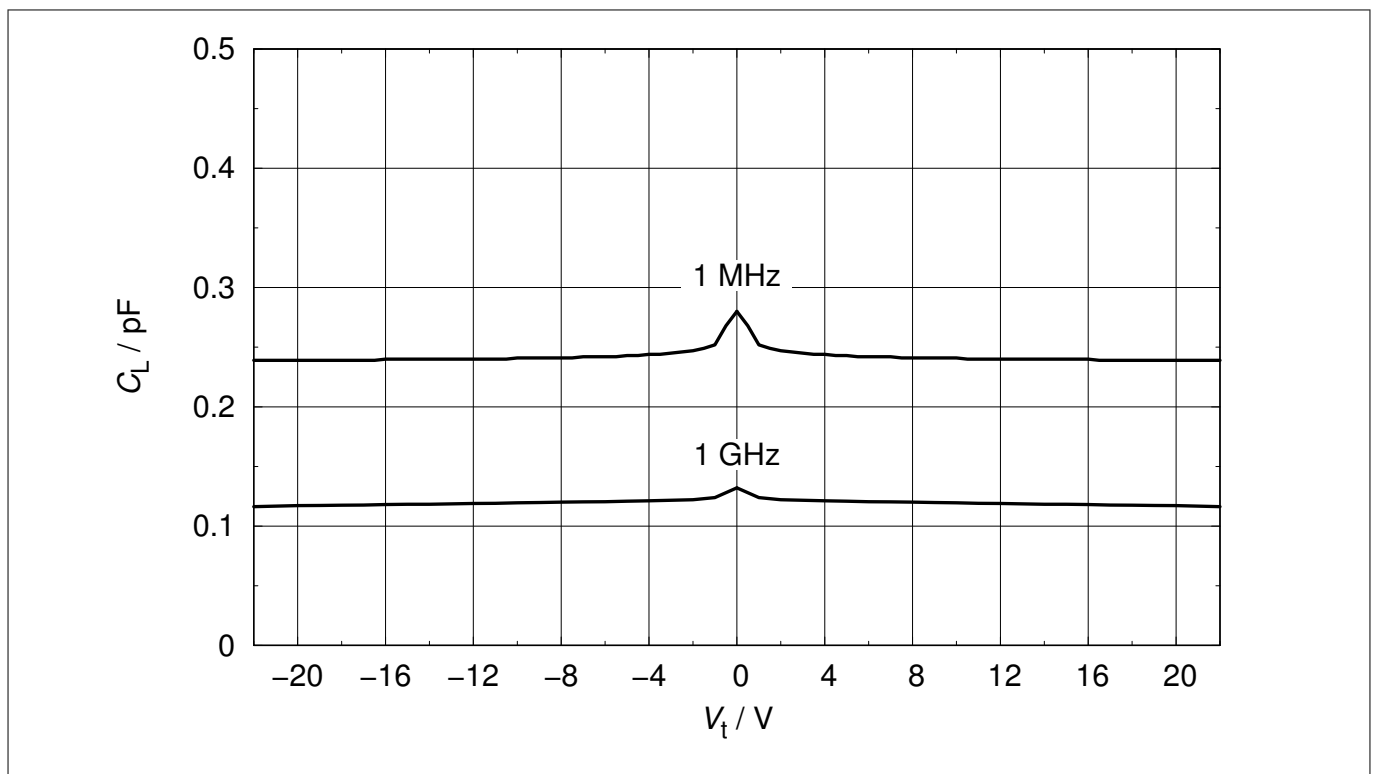


Figure 4 Line capacitance: $C_L = f(V_t)$, $f = 1\text{ MHz}, 1\text{ GHz}$

3 Typical characteristic diagrams

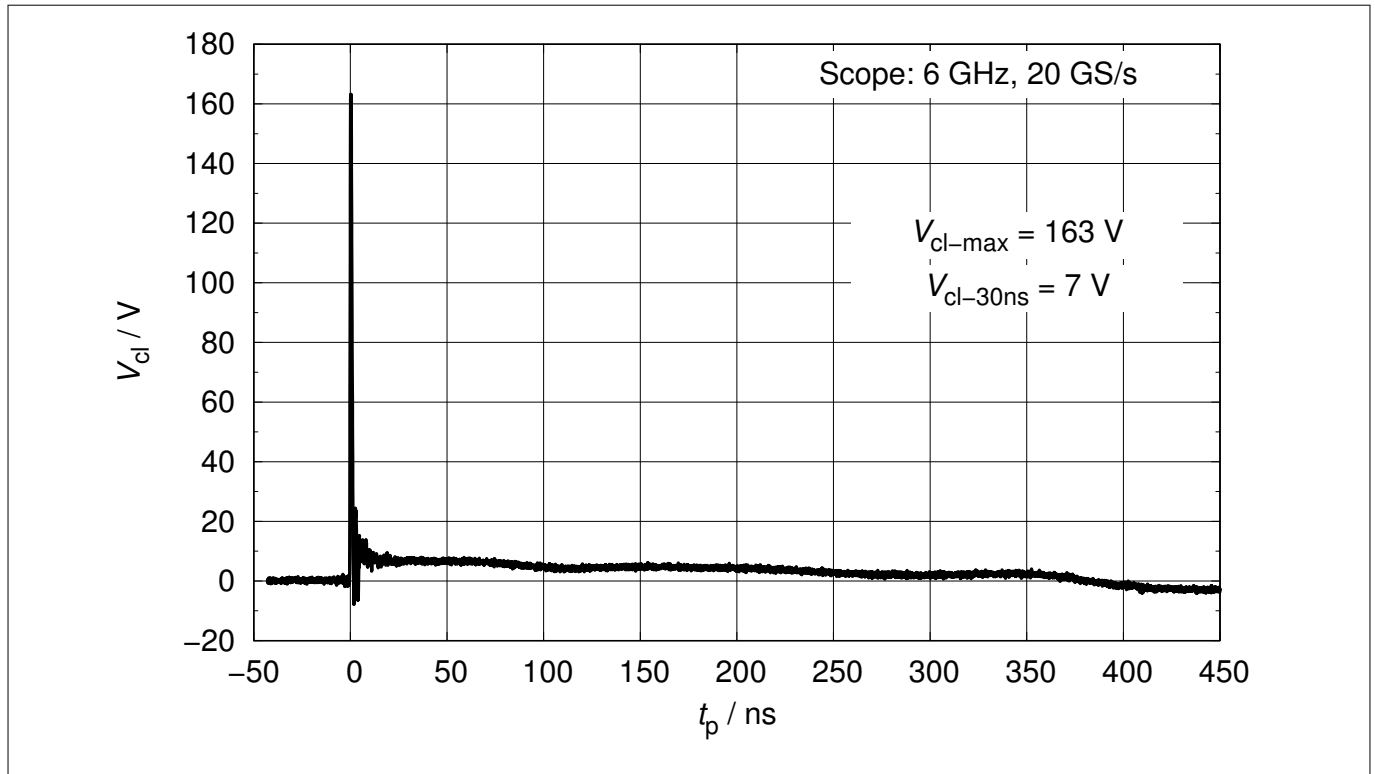


Figure 5 Clamping voltage (ESD): $V_{cl} = f(t_p)$, 8 kV positive pulse based on IEC61000-4-2

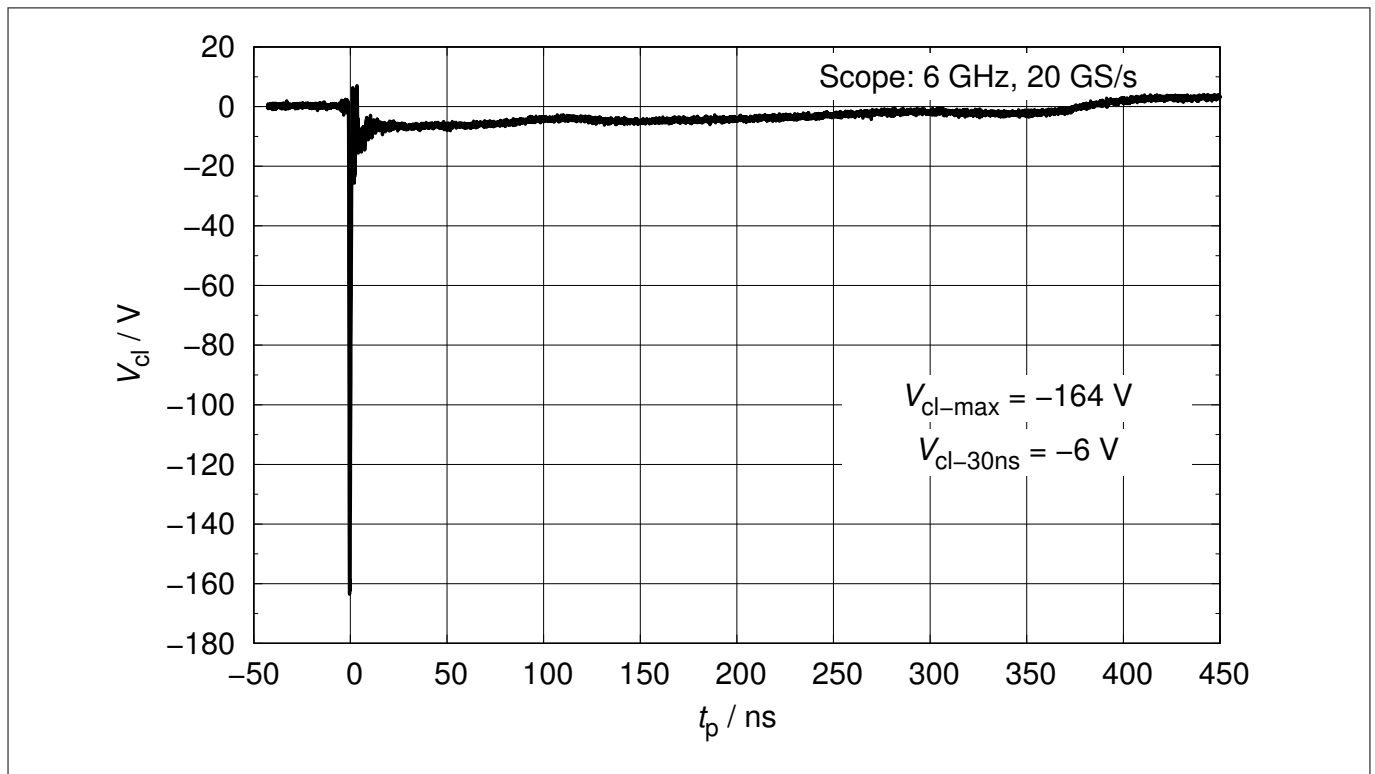


Figure 6 Clamping voltage (ESD): $V_{cl} = f(t_p)$, 8 kV negative pulse based on IEC61000-4-2

3 Typical characteristic diagrams

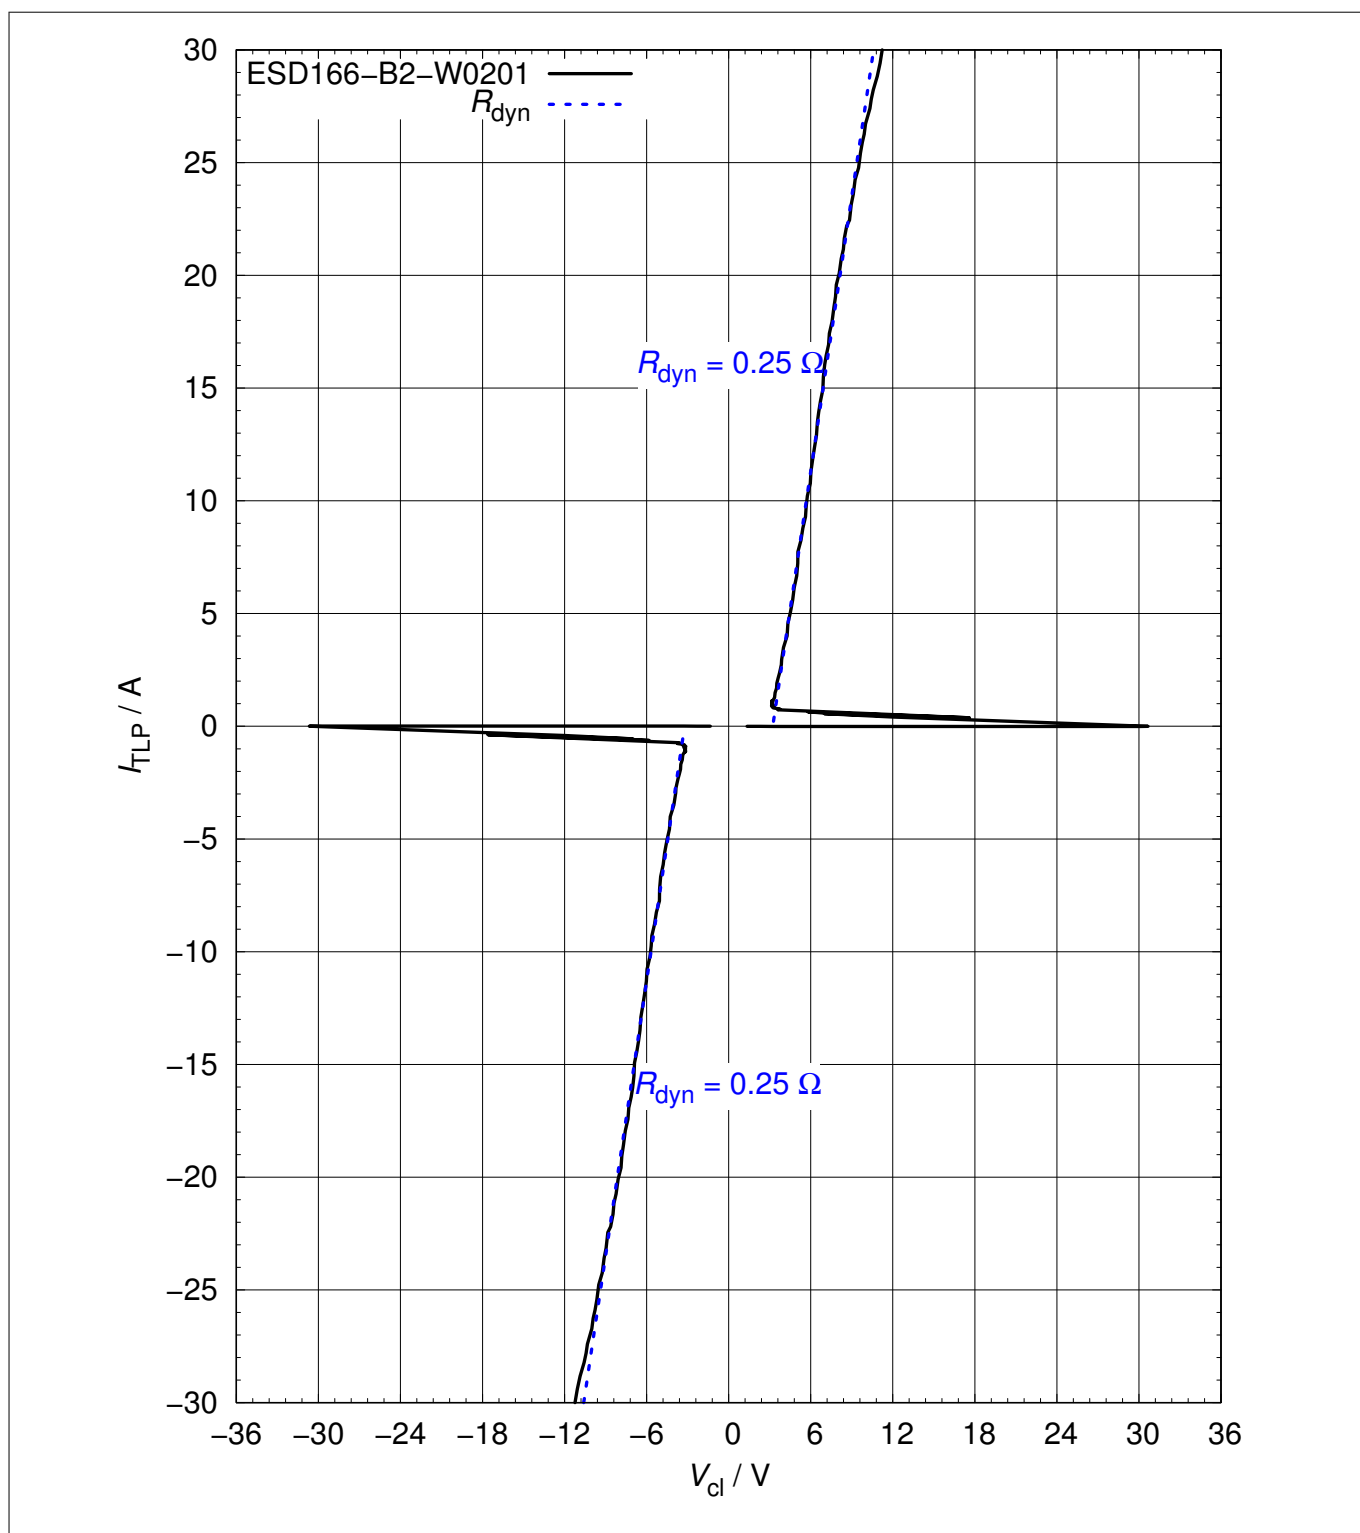


Figure 7 Clamping voltage (TLP): $I_{TLP} = f(V_{cl})$

3 Typical characteristic diagrams

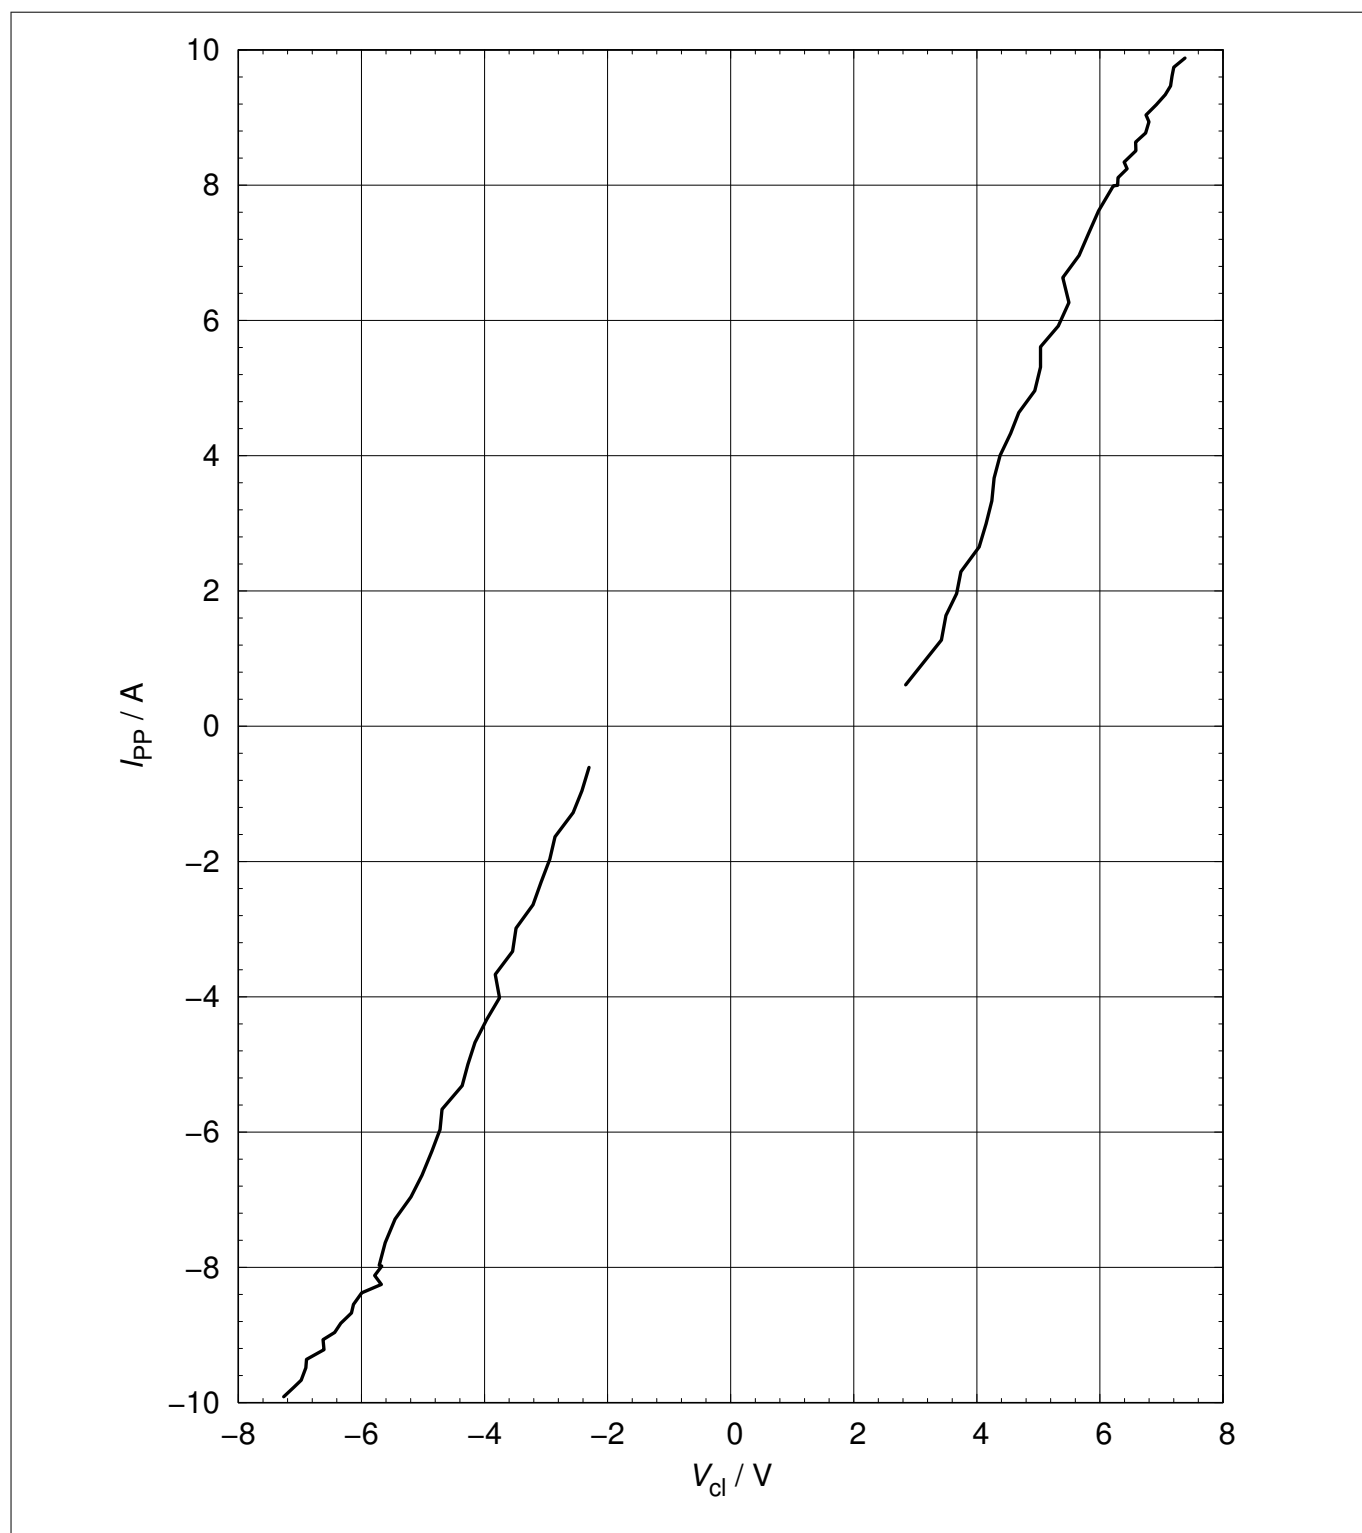


Figure 8 Clamping voltage (Surge): $I_{PP} = f(V_{CL})$, based on IEC61000-4-5

3 Typical characteristic diagrams

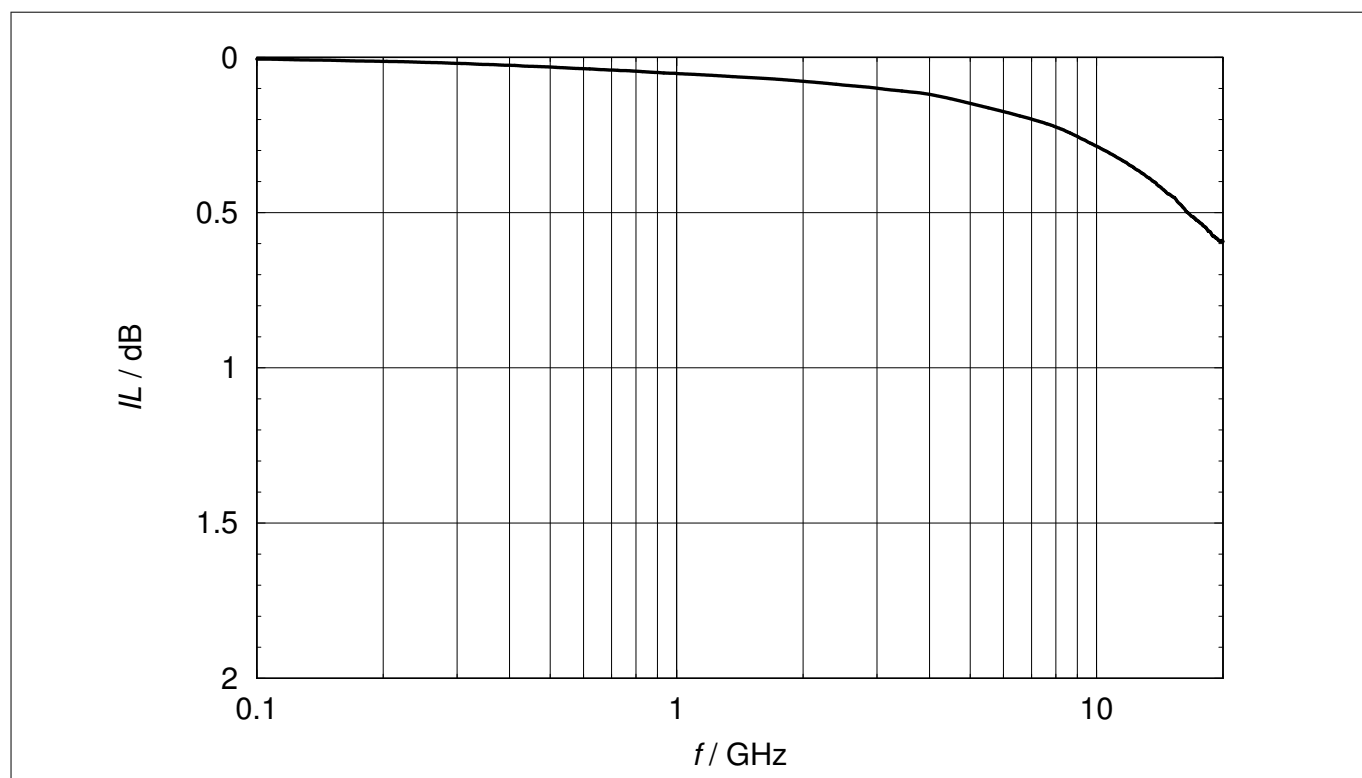


Figure 9 Insertion loss $IL = f(f)$, measured in a 50 Ω system



Figure 10 Return loss $R_L = f(f)$, measured in a 50 Ω system

4 Package information WLL-3-1

4 Package information WLL-3-1

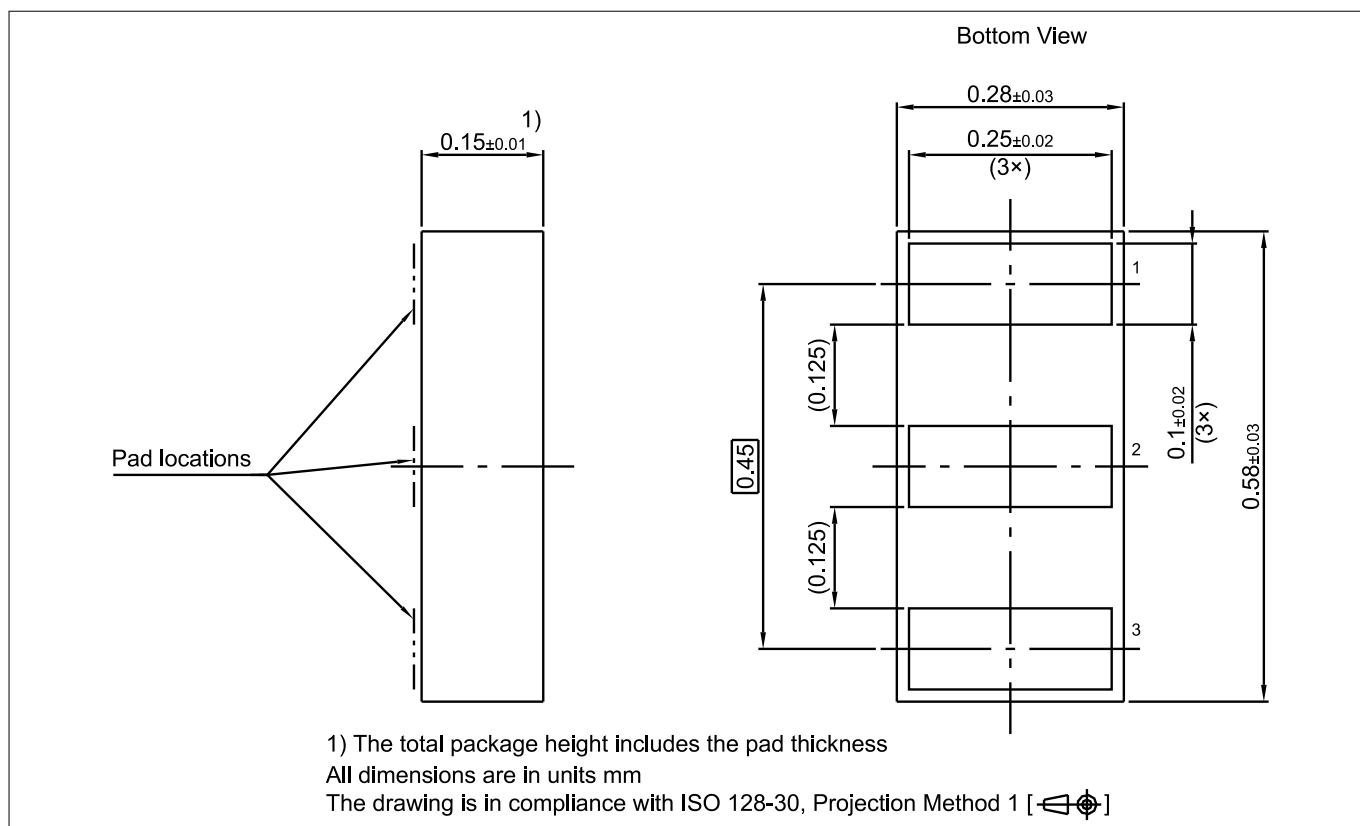


Figure 11 WLL-3-1 package

Note: For package information including footprint, packing and assembly recommendation refer to:

<https://www.infineon.com/package/SG-WLL-3-1/>

References**References**

- [1] Infineon Technologies AG: *Understanding ESD protection device characteristics product information*; [Available online](#)
- [2] Infineon Technologies AG: *Effective ESD protection design at system level using VF-TLP characterization methodology application note*; [Available online](#)

5 Revision history

Document version	Date of release	Description of changes
1.0	2026-03-06	Initial release

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Protection Diodes / TVS Diodes](#) ***category:***

Click to view products by [Infineon](#) ***manufacturer:***

Other Similar products are found below :

[60KS200C](#) [D5V0F4U5P5-7](#) [P4KE27CA](#) [P6KE11CA](#) [JAN1N6461](#) [P6KE8.2A](#) [JANTX1N6475](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#)
[SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#) [CPDT-5V0USP-HF](#) [HSPC16701B02TP](#) [JANTX1N6052A](#)
[D3V3Q1B2DLP3-7](#) [SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [CEN955 W/DATA](#) [ESD101-B1-02EL E6327](#) [5KP48A](#) [5KP90A](#)
[15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P6KE13CA](#) [P6KE43CA](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#) [SA8.5A](#) [SA18A](#)
[SA11CA](#) [SMCJ78CA](#) [SMBJ51CA](#) [JANTX1N5650A](#) [SMDA05LC-LF](#) [30KPA48A-LF](#) [GPZ1275](#) [P4KE6.8A](#) [CPDQC12VE-HF](#)
[GRPADATAJANTX1N6041A](#) [DSILC6-4SC6](#) [5KP45A-TP](#) [SMLJ26A-TP](#) [D5V0Q1B2CSP-7](#) [NSPM3042MXT5G](#)