

# Spring-loaded test probe GKS-113 306 400 A 0605

Item GKS-113-0842



GO TO PRODUCT


**ingun**<sup>®</sup>

Partner for Future Technology

- Robust test probes with distinctive collar (stop) on the barrel
- Optimum adjustment of the stroke ratios in the test fixture:  
The collar is available in different heights, which, in combination with the receptacles, allows a range of installation heights
- Stainless steel versions for temperatures from -100 °C up to +200 °C available



1:1

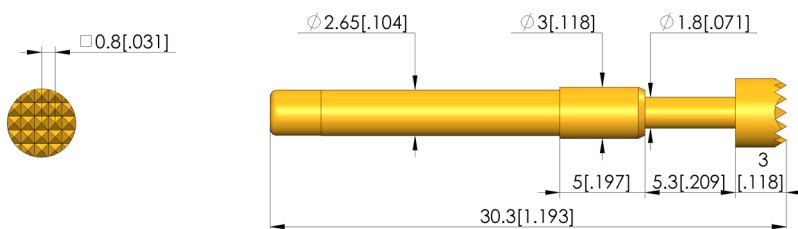

## General data

Product group:  
Sub-product group:  
Series:  
Grid:  
Contacting from:  
Magnetic:  
Installation type:  
Quick-exchange system:  
Adjustable installation height:  
Non-rotating:  
Compatible receptacle(s):  
Min. temperature:  
Max. temperature:  
RoHS-compliant:

ICT / FCT (in-circuit test and function test)  
Metric standard  
GKS-113  
4.5 mm [177 mil]  
Pin, Post, Flat contact  
Yes  
Plug-in  
Yes  
No  
KS-113, KS-113 23  
- 40 °C [- 104 °F]  
+ 80 °C [+ 176 °F]  
RoHS-3;6c

## Electrical data

Current load capacity / rated current:  
Typical resistance (Ri):

5 A  
<30 mOhm

## Mechanical data

Total length:  
Barrel diameter:  
Maximum stroke:  
Spring pre-load:  
Collar height:  
Spring force at working stroke:  
Recommended working stroke:

30.3 mm [1.19 in]  
2.65 mm [.104 in]  
5.3 mm [.208 in]  
0.21 N [.755 ozf]  
05  
0.6 N [2.15 ozf]  
4 mm [.157 in]

## Tip style data

Tip style:  
Tip diameter:  
Tip style surface:  
Tip style material:

06 serrated  
4 mm [.157 in]  
A gold  
3 CuBe

ICT/FCT TEST PROBES

# Spring-loaded test probe


## GKS-113 306 400 A 0605

Item GKS-113-0842



**ingun**<sup>®</sup>

Partner for Future Technology

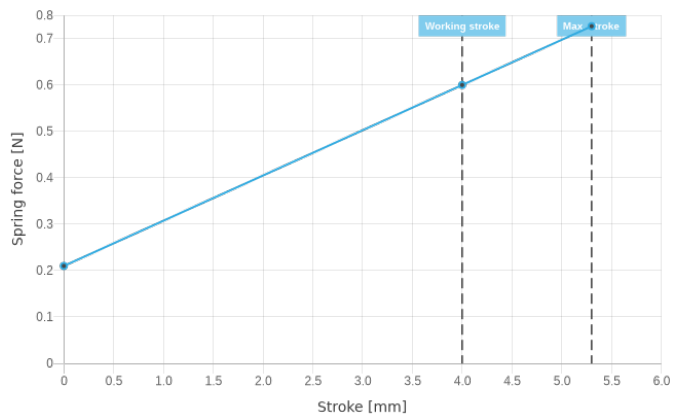

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 04/24\_GB

Learn more about  
ICT/FCT Test probes



ingun.com

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Contact Probes](#) category:*

*Click to view products by [INGUN](#) manufacturer:*

Other Similar products are found below :

[CT5253](#) [S-4-C-5-G S/C](#) [SS-75-B-2.4-G](#) [ICT-100-J-17-G](#) [300106-000-1103](#) [ICT-100-A-8-G S/C](#) [ICT-075-B-10-G-S S/C](#) [ICT-100-T-8-G S/C](#)  
[GSS-4-7-G](#) [S-0-B9-2.5-G S/C](#) [SS-40-J-2.4-G D/C](#) [S-0-V-3.7-G S/C](#) [SX-1-U-6.6-G D/C](#) [SS-50-J-5.1-G S/C](#) [SS-40-J-1.8-G-N/L D/C](#) [SS-3-7-G](#)  
[S/C W/HOLE .373 OAL](#) [SS-10-7-G S/C W/HOLE .373 OAL](#) [SS-1-7-G S/C W/HOLE .385 OAL](#) [SHE-5-H-18.7-G](#) [SHE-5-B-18.7-G](#) [SHE-3-](#)  
[A-7-G](#) [SH-4-A-10-G S/C](#) [101057-001-952](#) [S-50C-HS-4.3-DG-S](#) [S-5-F-8-G S/C SS SPGS](#) [S-5-F-16.4-G S/C](#) [S-4-K-5-G S/C](#) [S-4-E-5-D S/C](#)  
[S-2-E-10-D D/C](#) [S-2-A-10-D D/C](#) [S-100-UR-5.5-G-S](#) [S-100-T-8-RT](#) [S-100-J-17-G](#) [S-100-HK-10-G](#) [S-100-D-6.7-G](#) [S-100-B-3.5-G-S](#) [S-100-](#)  
[B-3.5-G](#) [S-1-U-6.6-D D/C .670 OAL](#) [S-1-A-6.6-D D/C .670 OAL](#) [S-075-S-3.8-RT](#) [S-075-J-3-G](#) [S-075-B-3-G](#) [S-075-A-7-G](#) [S-00-U-1.6-G](#)  
[D/C SS SPG](#) [S-00-ES-2-G D/C](#) [RX-100-SC](#) [RH-100-WW-429](#) [QUAD-0C-12-1](#) [PI-410](#) [ICT-L100-T-5.7-G](#)