

Radio-frequency probe

HFS-821 305 080 A 9905 MX62

Item HFS-821-0005





ingun[®]

Partner for Future Technology

- For contacting differential connectors from the MX and USCAR series in the automotive sector
- Connection via SE-821 cable interface
- Floating mechanism is integrated
- Installation via one-sided flange mounting

INGUN
PATENT

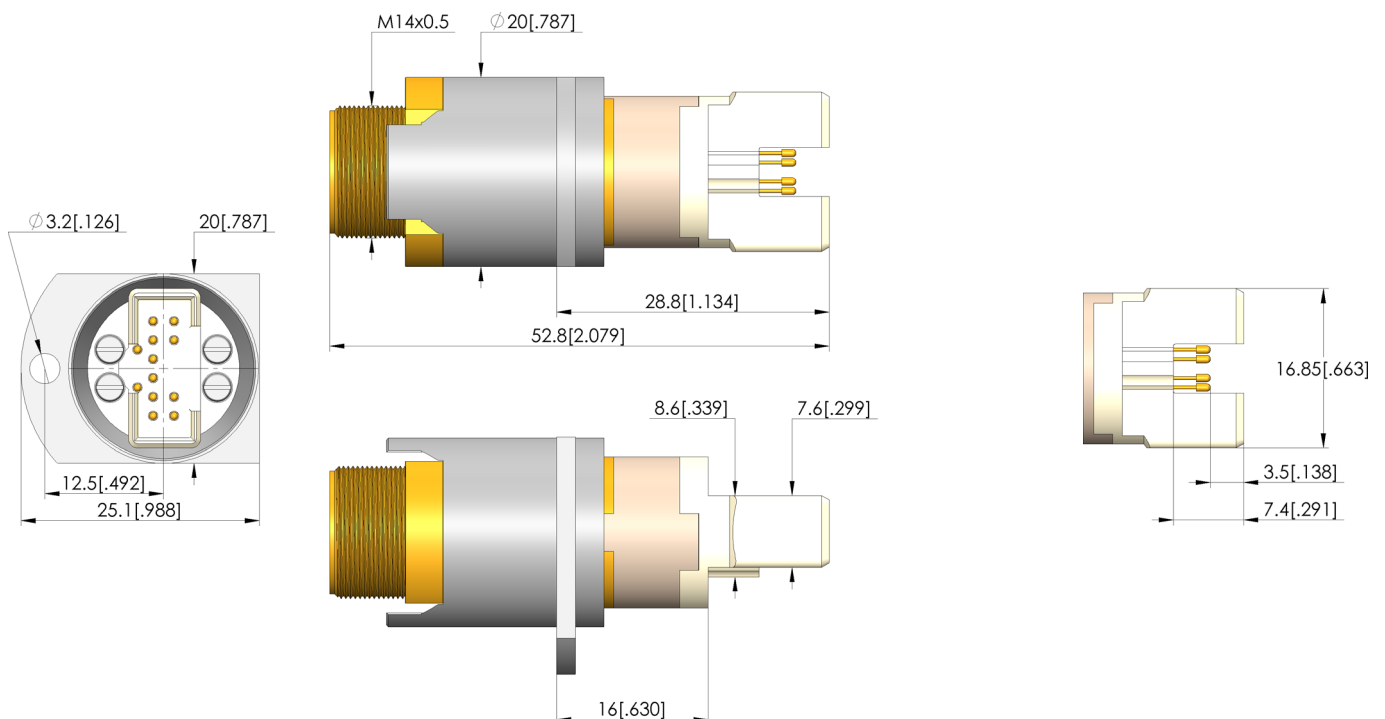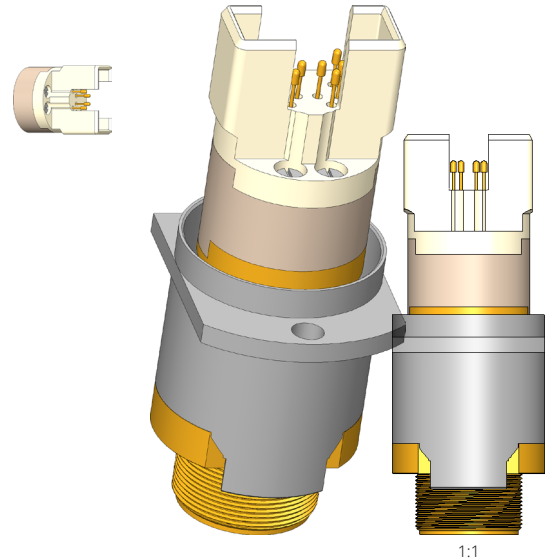

AUTOMOTIVE

Radio-frequency probe

HFS-821 305 080 A 9905 MX62

Item HFS-821-0005



GO TO PRODUCT

ingun[®]

Partner for Future Technology

General data

Product group:	HFS radio-frequency test probes
Series:	HFS-821
Sub-series:	HFS-821
Grid:	20.5 mm [807 mil]
DUT / contact:	MX62
Installation type:	Flange
DUT interface gender :	F signal conductor female / socket
Floating mount:	Yes
Non-rotating:	Yes
Continuous plunger:	Yes
Interface of compatible assembly:	SE-821 MX62 plug, 10-pole, screw-in, for HFS-821/MX62
Compatible assembly interface gender :	M signal conductor male / pin
Recommended torque at interface:	10 cNm [.885 lbf-in]
Min. temperature:	- 40 °C [- 104 °F]
Max. temperature:	+ 80 °C [+ 176 °F]
RoHS-compliant:	RoHS-3;6c

Outer conductor data

Outer conductor tip style:	05 bullet-nosed (full radius)
Outer conductor tip style diameter:	0.8 mm [.031 in]
Spring force of entire outer conductor at working stroke:	10 N [35.9 ozf]
Outer conductor working stroke:	3.5 mm [.137 in]
Outer conductor maximum stroke:	5 mm [.196 in]
Exchangeable outer conductor:	No
Outer conductor max. current load capacity:	3 A

Inner conductor data

Inner conductor tip style:	02 flat
Inner conductor tip style diameter:	0.8 mm [.031 in]
Inner conductor tip style material:	3 CuBe
Inner conductor tip style surface:	A gold
Number of inner conductors:	10
Exchangeable inner conductor:	GKS-080-0058
Inner conductor working stroke:	0 mm [0 in]
Inner conductor maximum stroke:	0 mm [0 in]
Inner conductor max. current load capacity:	3 A

Electrical data

Impedance:	100 Ohm
------------	---------

Mechanical data

Total spring force at working stroke:	10 N [35.9 ozf]
Total length:	52.8 mm [2.07 in]
Barrel diameter:	20 mm [.787 in]
Installation height without receptacle:	28.8 mm [1.13 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 04/24_GB

Learn more about
Radio-frequency test probes



AUTOMOTIVE

ingun.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Contact Probes](#) category:

Click to view products by [INGUN](#) manufacturer:

Other Similar products are found below :

[CT5253](#) [S-4-C-5-G S/C](#) [SS-75-B-2.4-G](#) [ICT-100-J-17-G](#) [300106-000-1103](#) [ICT-100-A-8-G S/C](#) [ICT-075-B-10-G-S S/C](#) [ICT-100-T-8-G S/C](#)
[GSS-4-7-G](#) [S-0-B9-2.5-G S/C](#) [SS-40-J-2.4-G D/C](#) [S-0-V-3.7-G S/C](#) [SX-1-U-6.6-G D/C](#) [SS-50-J-5.1-G S/C](#) [SS-40-J-1.8-G-N/L D/C](#) [SS-3-7-G](#)
[S/C W/HOLE .373 OAL](#) [SS-10-7-G S/C W/HOLE .373 OAL](#) [SS-1-7-G S/C W/HOLE .385 OAL](#) [SHE-5-H-18.7-G](#) [SHE-5-B-18.7-G](#) [SHE-3-](#)
[A-7-G](#) [SH-4-A-10-G S/C](#) [101057-001-952](#) [S-50C-HS-4.3-DG-S](#) [S-5-F-8-G S/C SS SPGS](#) [S-5-F-16.4-G S/C](#) [S-4-K-5-G S/C](#) [S-4-E-5-D S/C](#)
[S-2-E-10-D D/C](#) [S-2-A-10-D D/C](#) [S-100-UR-5.5-G-S](#) [S-100-T-8-RT](#) [S-100-J-17-G](#) [S-100-HK-10-G](#) [S-100-D-6.7-G](#) [S-100-B-3.5-G-S](#) [S-100-](#)
[B-3.5-G](#) [S-1-U-6.6-D D/C .670 OAL](#) [S-1-A-6.6-D D/C .670 OAL](#) [S-075-S-3.8-RT](#) [S-075-J-3-G](#) [S-075-B-3-G](#) [S-075-A-7-G](#) [S-00-U-1.6-G](#)
[D/C SS SPG](#) [S-00-ES-2-G D/C](#) [RX-100-SC](#) [RH-100-WW-429](#) [QUAD-0C-12-1](#) [PI-410](#) [ICT-L100-T-5.7-G](#)