

# High-current probe HSS-118 306 250 A 0810

Item HSS-118-0539



**ingun**<sup>®</sup>

Partner for Future Technology

## General data

|                                |                         |
|--------------------------------|-------------------------|
| Product group                  | High-current test probe |
| Sub-product group              | Standard HSS (press-in) |
| Series                         | HSS-118                 |
| Grid                           | 3 mm [118 mil]          |
| Contacting from                | Pin, Post, Flat contact |
| Magnetic                       | Yes                     |
| Installation type              | Plug-in                 |
| Quick-exchange system          | Yes                     |
| Adjustable installation height | No                      |
| Non-rotating                   | No                      |
| Compatible receptacle(s)       | KS-112                  |
| Min. temperature               | - 100 °C [- 212 °F]     |
| Max. temperature               | + 200 °C [+ 392 °F]     |
| RoHS-compliant                 | RoHS-3;6c               |

## Electrical data


|                                       |          |
|---------------------------------------|----------|
| Current load capacity / rated current | 5 A      |
| Typical resistance (Ri)               | <10 mOhm |

## Mechanical data

|                                |                   |
|--------------------------------|-------------------|
| Total length                   | 40.3 mm [1.58 in] |
| Barrel diameter                | 1.66 mm [.065 in] |
| Maximum stroke                 | 5.3 mm [.208 in]  |
| Spring pre-load                | 0.24 N [.863 ozf] |
| Collar height                  | 10                |
| Spring force at working stroke | 0.8 N [2.87 ozf]  |
| Recommended working stroke     | 4 mm [.157 in]    |

## Tip style data

|                    |                  |
|--------------------|------------------|
| Tip style          | 06 serrated      |
| Tip diameter       | 2.5 mm [.098 in] |
| Tip style surface  | A gold           |
| Tip style material | 3 CuBe           |

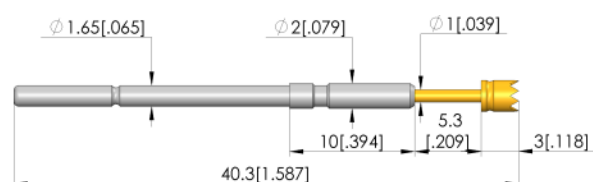


HIGH-CURRENT TEST PROBE

High-current probe  
**HSS-118 306 250 A 0810**  
Item HSS-118-0539



**ingun**<sup>®</sup>  
Partner for Future Technology

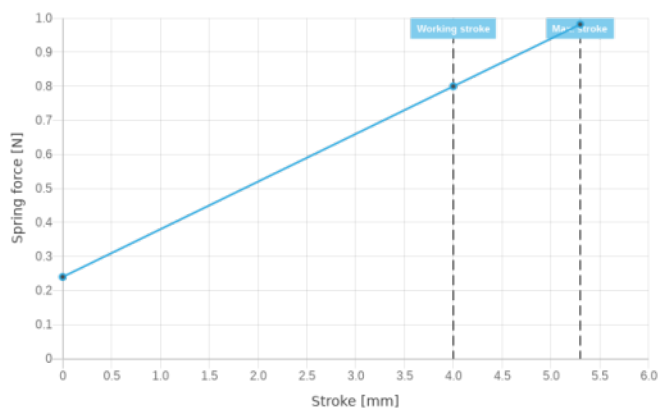

**INGUN Prüfmittelbau GmbH**

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 11/23 EN

Learn more about  
**High-current test probe**



**ingun.com**

HIGH-CURRENT TEST PROBE

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Contact Probes](#) category:*

*Click to view products by [INGUN](#) manufacturer:*

Other Similar products are found below :

[CT5253](#) [S-4-C-5-G S/C](#) [SS-75-B-2.4-G](#) [ICT-100-J-17-G](#) [300106-000-1103](#) [ICT-100-A-8-G S/C](#) [ICT-075-B-10-G-S S/C](#) [ICT-100-T-8-G S/C](#)  
[GSS-4-7-G](#) [S-0-B9-2.5-G S/C](#) [SS-40-J-2.4-G D/C](#) [S-0-V-3.7-G S/C](#) [SX-1-U-6.6-G D/C](#) [SS-50-J-5.1-G S/C](#) [SS-40-J-1.8-G-N/L D/C](#) [SS-3-7-G](#)  
[S/C W/HOLE .373 OAL](#) [SS-10-7-G S/C W/HOLE .373 OAL](#) [SS-1-7-G S/C W/HOLE .385 OAL](#) [SHE-5-H-18.7-G](#) [SHE-5-B-18.7-G](#) [SHE-3-](#)  
[A-7-G](#) [SH-4-A-10-G S/C](#) [101057-001-952](#) [S-50C-HS-4.3-DG-S](#) [S-5-F-8-G S/C SS SPGS](#) [S-5-F-16.4-G S/C](#) [S-4-K-5-G S/C](#) [S-4-E-5-D S/C](#)  
[S-2-E-10-D D/C](#) [S-2-A-10-D D/C](#) [S-100-UR-5.5-G-S](#) [S-100-T-8-RT](#) [S-100-J-17-G](#) [S-100-HK-10-G](#) [S-100-D-6.7-G](#) [S-100-B-3.5-G-S](#) [S-100-](#)  
[B-3.5-G](#) [S-1-U-6.6-D D/C .670 OAL](#) [S-1-A-6.6-D D/C .670 OAL](#) [S-075-S-3.8-RT](#) [S-075-J-3-G](#) [S-075-B-3-G](#) [S-075-A-7-G](#) [S-00-U-1.6-G](#)  
[D/C SS SPG](#) [S-00-ES-2-G D/C](#) [RX-100-SC](#) [RH-100-WW-429](#) [QUAD-0C-12-1](#) [PI-410](#) [ICT-L100-T-5.7-G](#)