



ELPAC XWA065 SERIES CLASS I

65 Watt Medical / ITE Desktop Power Supply

- Medical Approval - EN60601-1 Class I 3.2 Edition
- ITE Approval - IEC62368-1 Class I
- EMC safety - IEC/EN 60601-1-2 4th edition
- Low Leakage Current
- High Efficiency: Level VI
- High Power Density 7.39W/in³
- LED Indicator
- 5-Year Limited Warranty
- Ingress Protection: IP22
- 6db Margin for CE/RE EMI test



Input	
Input Voltage	85 – 264VAC (100 – 240VAC Nominal)
Input Frequency	47 – 63Hz (50-60Hz Rated)
Input Current	1.6A-0.8A rms
Inrush Current	<60A at 240VAC cold start
Power Factor	N/A
Zero Load Power	<0.21W
Earth Leakage Current (Typical)	<200µA @ 132VAC @ 60Hz
	<400µA @ 240VAC @ 60Hz
Touch Leakage Current	<35µA @ 132VAC @ 60Hz
	<65µA @ 240VAC @ 60Hz

Notes

**Ripple and noise measured with 20MHz bandwidth; 10µF tantalum capacitor in parallel with a 0.1µF ceramic capacitor.

Output	
Output Voltage	See Table
Total Regulation	+/-5%
Minimum Load	No minimum load required
Start-Up Delay	<1.0s
Hold-Up Time	>10ms at nominal input voltage at full load
Ripple & Noise	<1% pk-pk *
Over Voltage Protection	110 – 135%
Over Temperature Protection	Active - Recoverable Passive - Non recoverable
Over Current Protection	110 – 180%
Short Circuit Protection	Shutdown, auto-restart (hiccup mode)

Model Number	Output Voltage	Output Current	Peak Current ¹	Total Regulation ²	Typical Efficiency ³
XWA065012A-11A ⁴	12.0V	5.416A	5.416A	±5%	88.0%
XWA065015A-11A ⁴	15.0V	4.333A	4.333A	±5%	88.5%
XWA065018A-11A ⁴	18.0V	3.611A	3.611A	±5%	89.0%
XWA065024A-11A ⁴	24.0V	2.708A	2.708A	±5%	89.5%

Notes

1) Maximum load 65W.

2) Includes initial setting, line regulation, load regulation, and thermal drift.

3) Typical at 115VAC with full load (including output cable).

4) AC cord part number 67400-277-AB not included, but can be ordered separately.

ELPAC XWA065 SERIES CLASS I

65 Watt Medical / ITE Desktop Power Supply




General	
Efficiency	Avg. Efficiency 88.5% @ 115VAC Avg. Efficiency 89.0% @ 230VAC
MTBF	min. 500,000 hours, SR-332 issue 3 at 25°C
Size	3.35" (85.0mm) x 2.09" (53.0mm) x 1.26" (32.0mm)
Weight	0.73 LBS (0.331 Kg)
Power Density	7.9W/in³

Environmental	
Operating Temperature	0 - 40°C
Storage Temperature	-40°C to +80°C
Relative Humidity	5-93%, non-condensing
Cooling	Natural Convection
Vibration	Units meet MIL-STD-810G Figure 514.6C-1 category 4
Altitude	5000m

EMC & Safety - Medical	
Emissions	FCC class B, CISPR11 class B IEC/EN60601-1-2(Ed.4) EN61000-3-2, -3
Immunity	EN61000-4-2, -3, -4, -5, -6, -11
Certified by TUV to the following:	cTUVus
	ANSI/AAMI ES60601-1:2005+A2+A1
	CAN/CSA-C22.2 No.60601-1:14
	CB per IEC60601-1 3.2 Edition
	CE marked to LVD and CE EMC


Input & Output Configuration	
Standard Input Cable	Not Provided (P/N 67400-277-AB)
Connection on Power Supply Body	IEC 320 C14 Receptacle
Standard Output Cable	6ft (12V within ferrite bead)
Output Cable Cord Size	2x16awg
Output Cable Connector	Swithcraft DIN-5, P/N 05GM5MX(male pins)
Output Cable Mating Connector	Swithcraft 57GB5FX (5 pin) or equivalent
Output Type	Floating

Output Pin Assignments	
Pin 1	Return
Pin 2	Return
Pin 3	+V1
Pin 4	Return
Pin 5	+V1



EMC & Safety - ITE	
Emissions	FCC class B, EN55035:2017+A11:2020 EN55032:2015+A11:2020
Immunity	EN61000-4-2, -3, -4, -5, -6, -11
Certified by TUV to the following:	cTUVus
	UL62368-1:2019
	CAN/CSA-22.2 No.62368-1-19
	CB per IEC 62368-1:2018
	DOE EPS Energy efficiency (Level VI), EU CoC Energy efficiency (Level VI), EU ErP directive
	CE marked to LVD and CE EMC

Mechanical Drawing

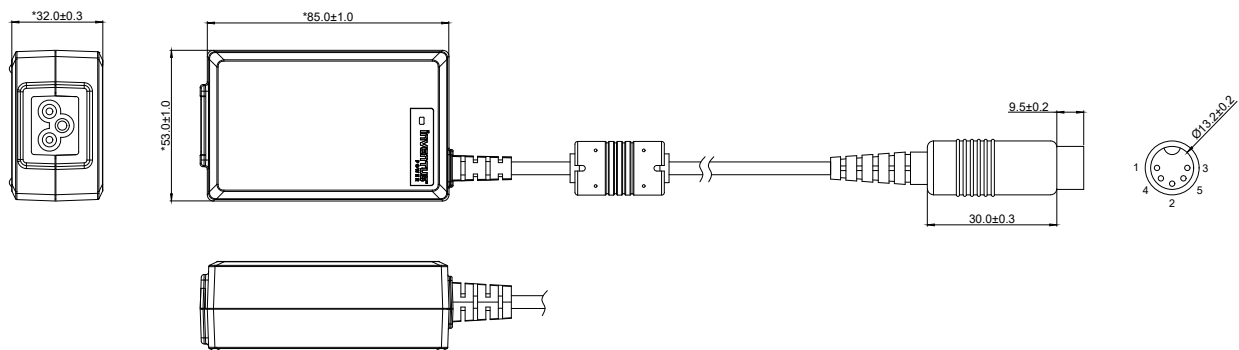

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Desktop AC Adapters](#) category:

Click to view products by [Inventus Power](#) manufacturer:

Other Similar products are found below :

[212A2220](#) [820A4080G](#) [825A0057-03](#) [TRH21A120-49E03-Level-VI](#) [PSA120U-560L6](#) [96PSA-A60W12V1-4](#) [96PSA-A60W12W7-3](#) [96PSA-A100W18D4-M3](#) [96PSA-A60W12R1-3](#) [5130](#) [52408](#) [52398](#) [SYS1621-PD60W-T2](#) [TRH70A240-45E02](#) [PEAD120B-14](#) [PEAD120B-19-1](#) [CPSUNOTAKY-07056](#) [CPSUNOTAKY-07058](#) [CPSUNOTAKY-07168](#) [CPSUNOTAKY-07169](#) [CPSUNOTAKY-07234](#) [CPSUNOTAKY-07288](#) [CPSUNOTAKY-07312](#) [CPSUNOTAKY-07342](#) [CPSUNOTAKY-07387](#) [CPSUNOTAKY-07388](#) [TE30A0503F01](#) [TE30A4803F01](#) [TE40A2403F01](#) [TE40A2403N01](#) [ME30A1803N01](#) [ME40A1203N01](#) [ME40A2403N01](#) [MENB1040A0503F01](#) [125530040F](#) [1255300611](#) [ME30A0503F01](#) [ME30A1203F01](#) [ME30A1803F01](#) [ME30A2403F01](#) [ME40A1803N01](#) [MENB1010A1203F01](#) [SDI18-12-UD-P5R](#) [MWA065012A-11A](#) [MWA150024A-12A](#) [OWA-90E-12](#) [OWA-90E-20](#) [OWA-90E-30](#) [CPSUNOTAKY-07052](#) [CPSUNOTAKY-07053](#)