10*20mm RGBW Side View
LED Neon strip DC24V

◆ Product Description

Silicone Neon LED flex made by extrusion,white color body,diffused color on the top side without light spot,it's bendable within limited semidiameter,Anti-UV and salt
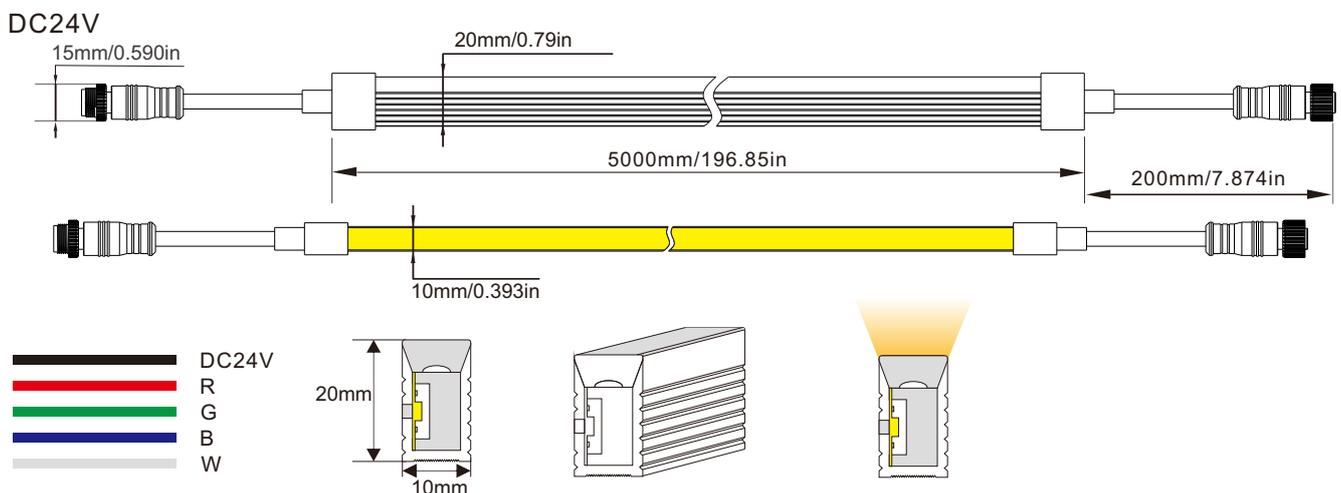
It's a 4 in 1 RGBW LED tape inside ,no Pixel control,each small section can be cut down

The standard size is 5meters included 10pcs mounting clips

5Pin bare wire output from each side of the body

UL LISTED E509505   **CE**   **ROHS**

◆ Product Datasheet

Product Number	N010060CC4PZ	Luminance/M	R:91 G:155 B:37 W:322lm
Operating Voltage	DC24V	Ra	/
Power/M	19.2W	Beam Angle	120°
SMD Type	SMD 5050	Size (mm)	5000x10x20mm
LED Qty/M	60	IP Rate	IP65
Color	RGB+W:3000K/4000K/6000K	Operation Temperature	- 25 ~ 60 ℃
Pixel/M	/	Material	Silicone
Control	PWM	Cutting Length	100mm
Wavelength	R:620-625 G:520-525 B:460-465nm	Net Weight/Roll	1.2Kg

◆ Outline Dimension   unit   mm

DC24V

15mm/0.590in

20mm/0.79in

5000mm/196.85in

200mm/7.874in

10mm/0.393in

	DC24V
	R
	G
	B
	W

20mm

10mm

www.ipixelleds.com

Add: 7F, Mingjinhai Complex Building, Tangtou Rd, Shiyan Town, Baoan, Shenzhen, China. 518108
Tel: 0086-755-85257292   Web: www.ipixelleds.com   E-mail: inquiry@ipixelleds.com

P1

深圳市像素之光科技有限公司
i P i x e l L E D L i g h t C o . , L t d

◆ Order number

DC24V	RGB+W:3000K	White PCB	IP65	N010060CC4PZ/C1
DC24V	RGB+W:4000K	White PCB	IP65	N010060CC4PZ/C2
DC24V	RGB+W:6000K	White PCB	IP65	N010060CC4PZ/C3

◆ Wiring diagram

220/110V AC

DC24V
Power Supply

LED   Controller

www.ipixelleds.com
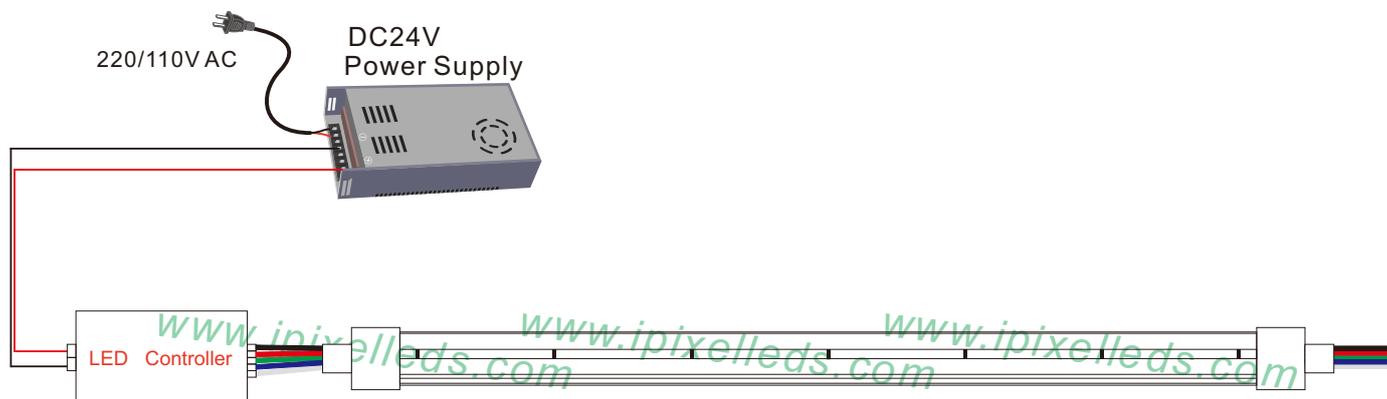
◆ Accessories

Name	Stainless steel clip	The front cover	End cap	Aluminum profile(1M/pcs)
Picture	standard	standard		
Renarks	L30.2xW10.6xH14.6mm			W12xH22.5mm

Note: The parameters are subject to change without notice!

www.ipixelleds.com

Add: 7F, Mingjinhai Complex Building, Tangtou Rd, Shiyan Town, Baoan, Shenzhen, China. 518108
Tel: 0086-755-85257292   Web: www.ipixelleds.com   E-mail: inquiry@ipixelleds.com   P2

◆ Correct bending way

Minimum bending diameter
60mm
Emitting side

Emitting side
Emitting side
✓
✓
Correct

Emitting side
✗

Emitting side
✗

Emitting side
✗
Forbid
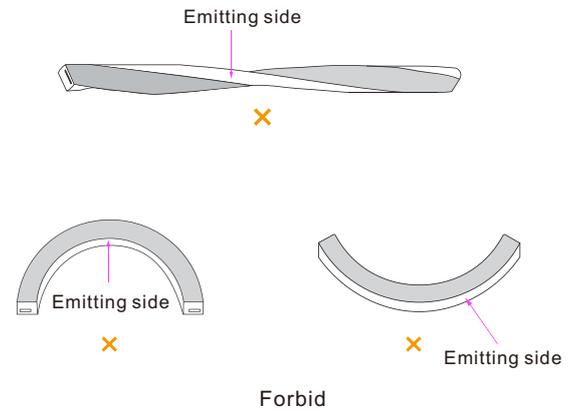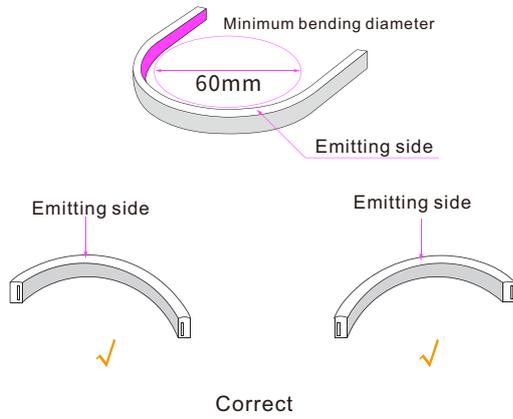
◆ Accessories

Stainless steel clip
30.2x10.6x14.6mm(LxWxH)

Aluminum profile
1000x10.6x14.6mm(LxWxH)

1   **2**   **3**   **4**

Note: The parameters are subject to change without notice!

www.ipixelleds.com

Add: 7F, Mingjinhai Complex Building, Tangtou Rd, Shiyan Town, Baoan, Shenzhen, China. 518108
Tel: 0086-755-85257292   Web: www.ipixelleds.com   E-mail: inquiry@ipixelleds.com

P2
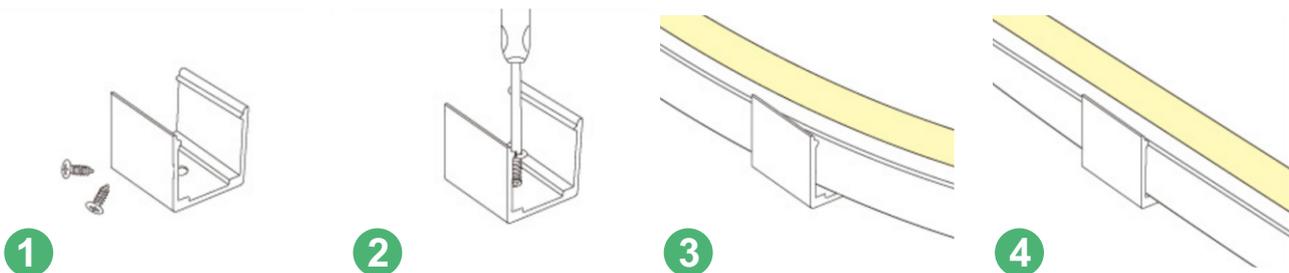
X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LED Lighting Bars and Strips *category:*

Click to view products by IPIXEL LED *manufacturer:*

Other Similar products are found below :

LFBLL-SW823-24V-8S125-20 S010060CC3PZ HH-SX144F008W24 -2835 WW WHITE PCB IP20 HH-SRGB840F010W24-COB N004120BB1LZ (6000K) N004120BC1LZ (3000K) N008120BB1LZ (BLUE) N008120BC1LZ (4000K) S008144CA4SA1/C1 (RGB+4000K IP20) S0121134ZC3PZ 929002650401 929002650801 929002650201 929002699801 929002650701 N013060CA3SA1 HQS-12W-60LED-NW-WP-12V-5M HQS-6W-60LED-WW-WP-24V-5M S020240BC1DC0/C3 HQS-12W-60LED-WW-WP-24V-5M HQS-12W-60LED-NW-24V-5M S012060CC4DC0/C3 HQS-9.6W-120LED-NW-WP-12V-5M HQS-6W-60LED-W-12V-5M HQS-12W-60LED-WW-12V-5M HH-SRGB60F310W12-5050 WHITE PCB IP65A HQS-6W-60LED-NW-12V-5M HQS-6W-60LED-NW-24V-5M TAMA LED K-30-2400-24V 24W/M TAMA LED K-CR30-1440-24 14,4W/M TAMA LED KWP-GHD30-0960-24 9,6W/M TAMA LED K-1920-120-RGB-24V 19.2W/M TAMA LED K-40-1091-24V 9.1W/M TAMA LED K-30-1091-24V 9.1W/M TAMA LED K-RGB-0700-24V TAMA LED K-VHE40-1440-24V 14,4W/M TAMA LED K-HD30-0480-24 4,8W/M TAMA LED K-HD40-0480-24 4,8W/M TAMA LED K-HD30-1440-24 14,4W/M TAMA LED K-VHE30-1440-24V 14,4W/M TAMA LED K-30-0480-24 4.8 W/M TAMA K-30/18-0960-24V TAMA LED K-VHE40-0960-24V 9.6W/M TAMA LED K-30-1440-24V 14.4W/M TAMA LED K-30-0960-24V 9.6W/M TAMA LED K-HD30-0960-24 9,6W/M TAMA LED K-CR40-0960-24 9,6W/M HQS-9.6W-120LED-W-24V-5M TAMA LED KWP-GHD30-1440-24 14,4W/M HQS-12W-60LED-W-12V-5M