




Addressable WS2812B LED Strip-144leds

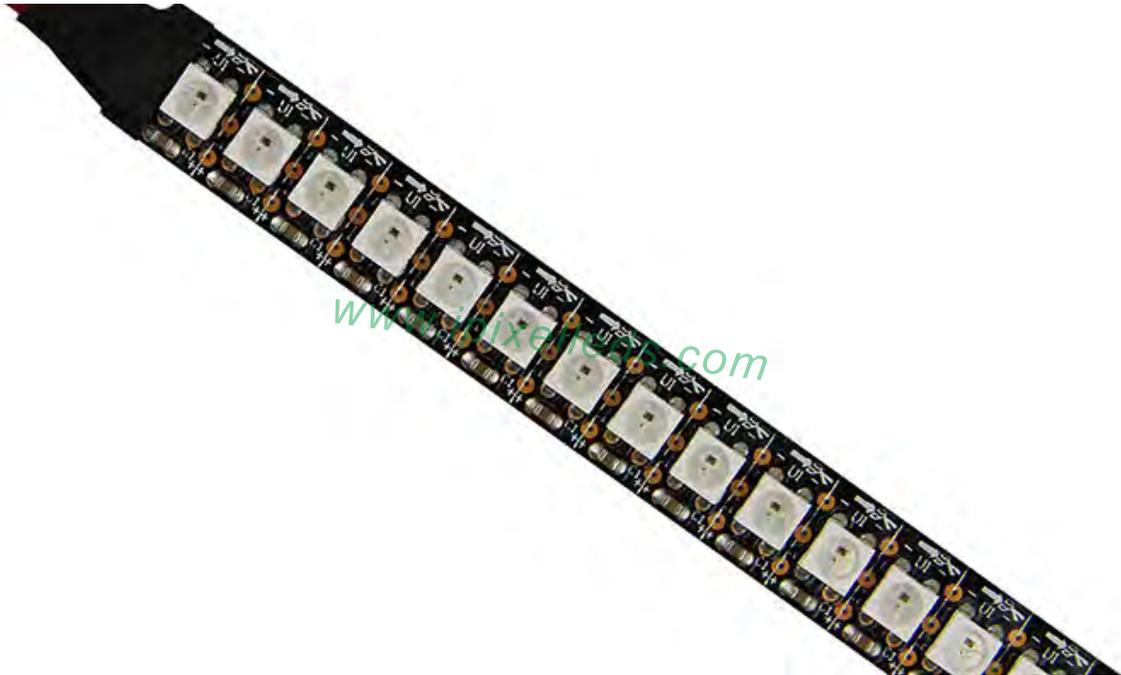

Product Description

This is a new chip again from worldsemi family , based on WS2812B and WS2813. To solve the chip breakdown and Strip's Voltage drop ,now we welcome RT1809.

The Flex is 144 Pixel/ LED per meter ,and 1 m in a roll we provide black and white color board. same as our other addressable tapes, it's cut-able per unit LED with a large soldering Pad which makes easy to re-solder again.



the PCB printed +12V DI ,BI, GND , both DI and BI means signal but it's only required to link the DI cable to your controller.

this PCB made by 3Ounce copper for more reliable application. 3 M tape attached on backside of strip. again we suggested you power it every 1 meters even it's 12V addressable.



Product Datasheet

| | |
|-----------------------|-------------------------|
| Product Number | S012144CB3SD2 |
| Light Source | RT1809 |
| Beam Angle | 120° |
| LED Quantity | 144 leds/m |
| Emitting Color | Full color |
| Luminance(MCD) | R:635nm G:510nm B:470nm |
| PCB color | White/Black |
| Operating Voltage | DC12V |
| Power (W) | 19W/M |
| Size (mm) | L 1000* W 12 |
| IP | IP 20/IP 65 |
| Net Weight | 0.13kg/roll |
| Operation Temperature | - 40 ~ 50 °C |

Application



Hotels ,restaurants, nights clubs, edge light

Recreational machines, playstation



Living rooms, coffee / wine bars, back lighting

TV, dancefloor background, shopping malls,

Strip IP Rate





Curve Lune


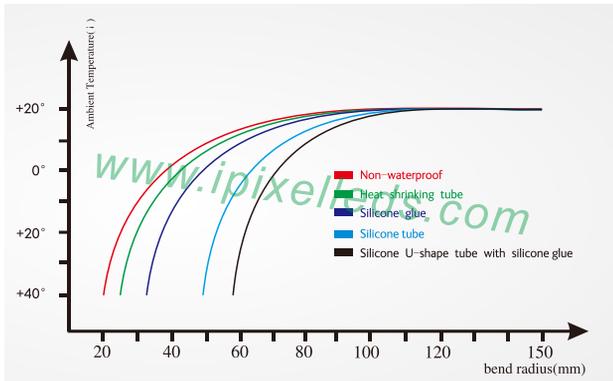



Diagram2: Bend Curve




Installation

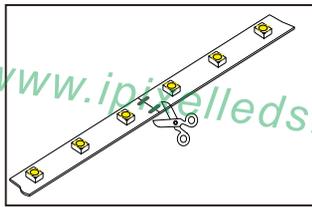


Cut in specific location

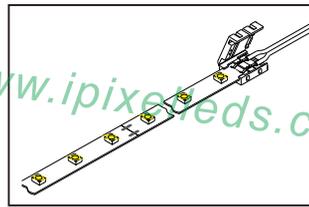


Put the PCB in the space between clip and connector, make the clips exactly aim at welding point

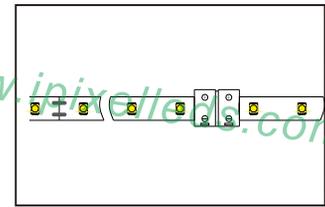

Close the cover of connector

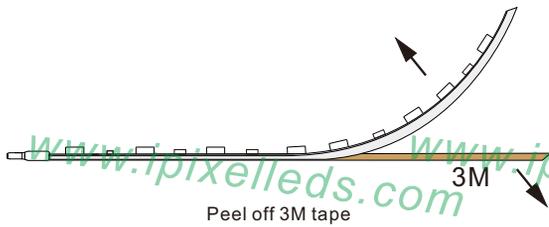


Peel off 3M tape

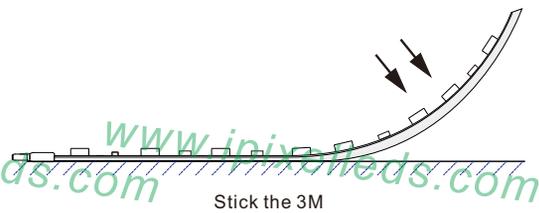

Stick the 3M



Install with clips

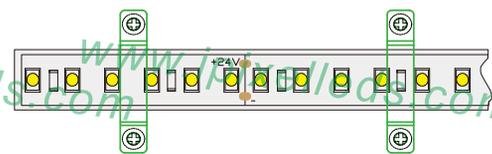

Fix with screws

Accessories (Excluded)



Screws




Silicone clip



End cap




Outline Dimension (unit:mm)

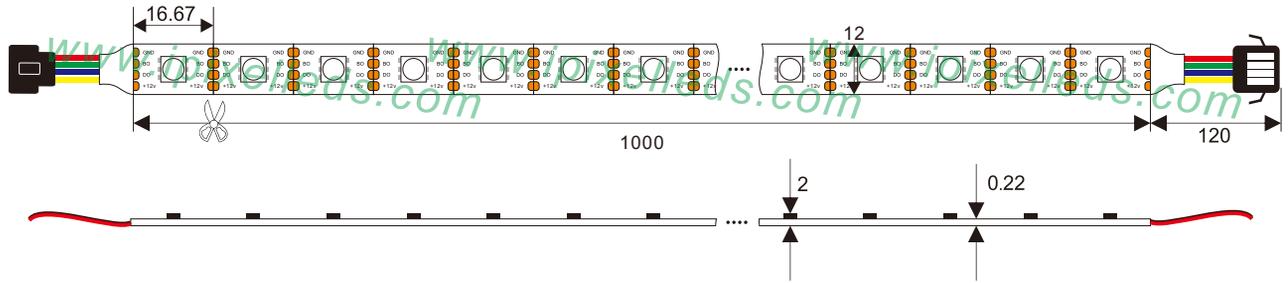

Connection


RGB LED strip light

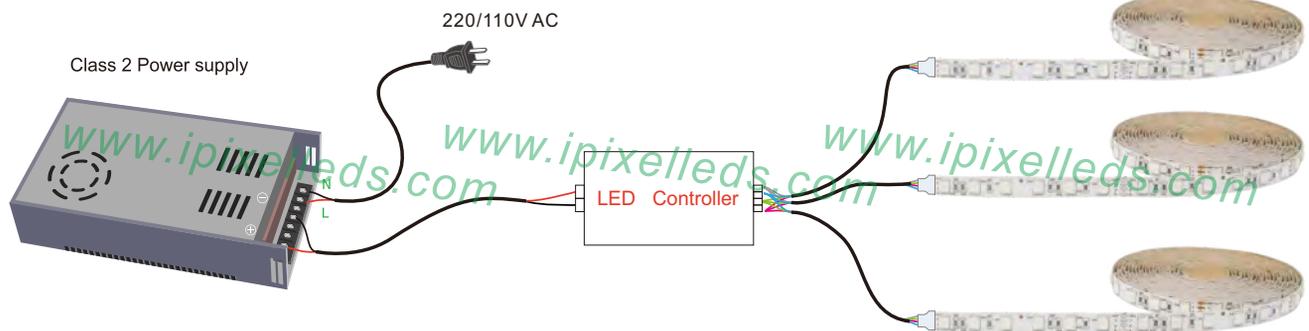

NOTES

1. Please apply different IP rate products according to different environment conditions;
2. Only install with Class 2 power unit
3. Do not install it when power is on. Before powering on, please make sure the wiring is correct;
4. Avoiding damaging the circuit or other component on the strip;
5. Avoid dragging, do not over bending during installation;
6. In order to get the best lighting effect, please do not connect overlong;
7. Please do not stare at the light for a long time when it is working to protect your eyes;
8. Installation required by a qualified electrician
9. Supply cable – R/C (AVLV2/8), external use style, rated minimum 300 V, 80 °C, minimum 22 AWG

Product packaging

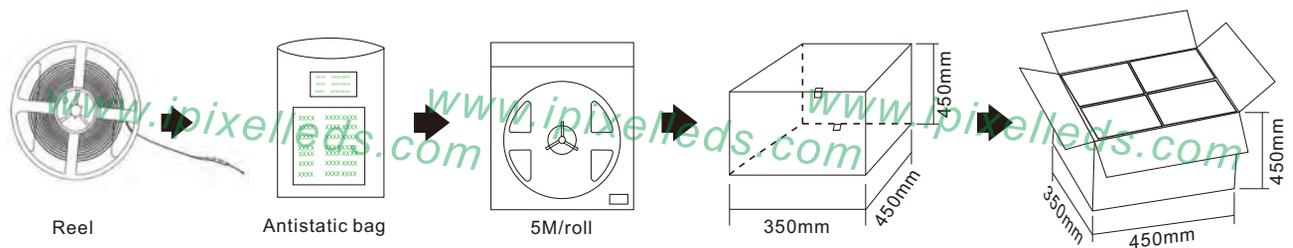

| Product number | Standard length | Quantity / volume | outer carton size | Weight(kg)/reel |
|---------------------|-----------------|-------------------|-------------------|-----------------|
| S012144CA3SA1(IP20) | 1M | 240 Reels | L450xW350xH450mm | 0.13kg |
| / | | | | / |
| / | | | | / |
| / | | | | / |
| / | | | | / |
| / | | | | / |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Lighting Bars and Strips](#) category:

Click to view products by [IPIXEL LED](#) manufacturer:

Other Similar products are found below :

[ZLF0310W62524](#) [LF1D-F2F-2W-300](#) [00215258](#) [HH-SWW320F010W12-COB IP20](#) [HH-SWW320F010W24-COB IP20](#) [HH-SWW528F210W12-COB IP65](#) [HH-SG528F010W24-COB IP20](#) [LF2D-EN2F-2W-A](#) [10001622](#) [LFBHL-SW827-24V-8S63-20](#) [LFBHL-SW860-24V-8S63-20](#) [LFBHL-SW940-24V-8S63-20](#) [HH-SRGB60F010W24-5050M](#) [N006120BB1LZ \(BLUE\)](#) [N006120BB1LZ \(GREEN\)](#) [N006120BB1LZ \(RED\)](#) [N006120BC1LZ \(BLUE\)](#) [N006120BC1LZ \(GREEN\)](#) [N006120BC1LZ \(GOLDEN YELLOW\)](#) [N006120BC1LZ \(RED\)](#) [S010030CB3SB7](#) [S010030CB3SB7 \(BLACK PCB\)](#) [S010060CB1LZ \(NEUTRAL WHITE IP65\)](#) [S010060CB1LZ \(WARM WHITE IP65\)](#) [S010060CB3SB7](#) [S010060CC1LZ \(WARM WHITE IP65\)](#) [S012060CB4ST \(BLACK PCB\)](#) [2633830000](#) [HH-SX72F008W24-2835 CW WHITE PCB IP20](#) [HH-SX180F010W24 -2835 WW WHITE PCB IP20](#) [HH-SX72F008W24-2835 NW WHITE PCB IP20](#) [HH-SX144F008W24 -2835 NW WHITE PCB IP20](#) [HH-SX180F010W24 -2835 NW WHITE PCB IP20](#) [HH-SX144F008W24 -2835 CW WHITE PCB IP20](#) [HH-SX144F008W24 -2835 WW WHITE PCB IP20](#) [HH-SX180F010W24 -2835 CW WHITE PCB IP20](#) [N008120BB1LZ \(BLUE\)](#) [S010060CA3SA1](#) [SCS-120-CW](#) [00219015](#) [10001611](#) [10001612](#) [10001613](#) [10001617](#) [10001618](#) [10001619](#) [10001623](#) [10001655](#) [10001657](#) [10001664](#)