



SPECIFICATIONS

Current Rating:3.0AMP

Contact Resistance:10mΩ Max

Dielectric Strength:Min 1000V RMS

Operation Temperature:-40°c to +105°c




Contact Material:Brass

Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PPS


Soldering Temperature: 260°C±5° 5S

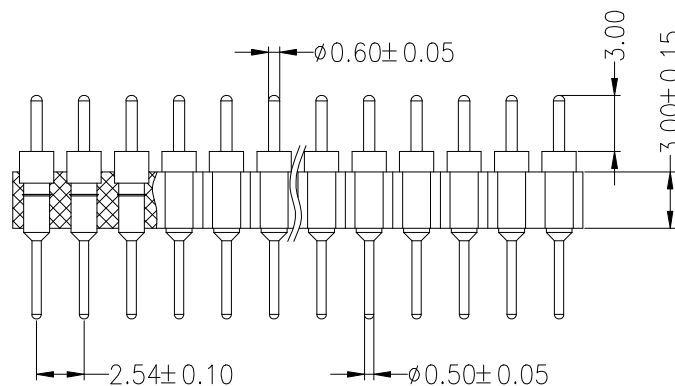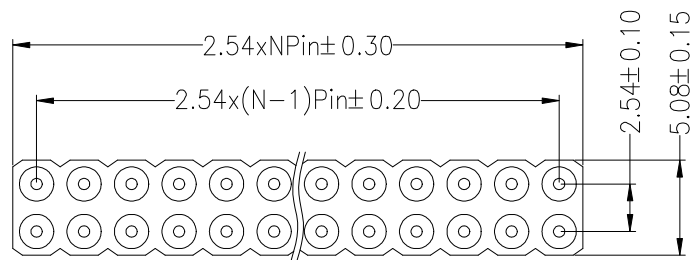

Ordering Information

3610 30 2 XX S XX 119 XX

No.of Pins Per Row 2-40
Contact Plating
G1:Gold Flash
G3:2U" Gold
G4:3U" Gold
G5:5U" Gold
G6:10U" Gold
G7:15U" Gold
Length 119=11.96mm
Stream code

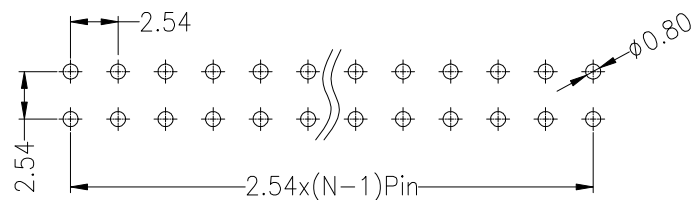

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

OPERATION		DRAW	Wei Chen	21.04.01	SCALE	FIT	JILN® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992	
					UNIT	mm		
X.X	±0.30	CHECK			SIZE	A4	PART NO.	3610302XXSXX119XX
X.XX	±0.20				SHEET	1/1		
X.XXX	±0.10	APPROVE			PROJ.	◆	TITLE:	2.54x3.0 双排双头针 L=11.96上针0.6下针0.5
Angle	±3°							
DIM	TOL							

A

A

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [JILN](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)
[65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[803-43-024-10-001000](#)