

G
F
E
D
C
B
A

1. Rated voltage : 250V(Max)
2. Current Rating: 3.0 AMP (Max.)
3. Contact Resistance: 30mΩ (Max.)
4. Withstanding voltage : 1000V AC/Minute
5. Insulation Resistance: 1000MΩ (Min)
6. Operation Temperature: -40℃ to +105℃

- 1.Housing : PBT (UL94V-0)
- 2.Contact : Copper Alloy, Au/Sn over Ni Plating
- 3.Shell : Steel, Ni Plated
- 4.Screw : SWRCH, Ni Plated
- 5.Harpoon : Copper Alloy, Tin Plated

6235-02 F 15 XX S X A XX

Connector Type
F=Female
M=Male

No. of Pins
9,15,
25,37P



Contact
S0:Gold
G0:Gold
G2:2u" Gold
G3:3u" Gold
G4:5u" Gold

Plating
Flash/Tin
Flash
Gold
Gold
Gold

Color
B=Black
W=White
U=Blue

Packing
A=Tray

Serial code

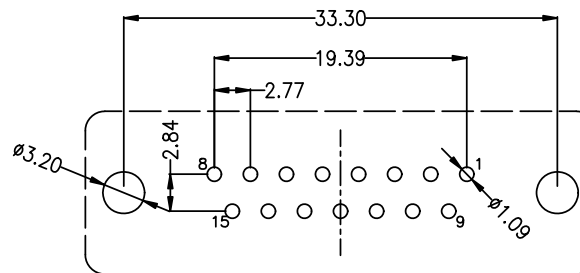

Tolerance: $\pm 0.05\text{mm}$

DRAW		OPERATION		SCALE	FIT	 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO., LTD	
		X.X	±0.30	UNIT	mm		
CHECK		X.XX	±0.20	SIZE	A4	PART NO.	6235-02F15XXSXAXX
		X.XXX	±0.10	SHEET	1/1		
APPROVE		Angle	±3°	PROJ.		TITLE:	DP-15P母/铆鱼叉锁螺丝

JILN® 东莞市锦凌电子有限公司
DONGGUAN JINLING ELECTRONIC CO., LTD

PART NO.

6235-02F15XXSXAXX

TITLE:

DP-15P母/鲫鱼叉锁螺丝

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [D-Sub Standard Connectors](#) category:

Click to view products by [JILN](#) manufacturer:

Other Similar products are found below :

[015-0341-000](#) [015-0349-000](#) [015-0350-000](#) [015-8755-001](#) [017041-0005](#) [021-0144-011](#) [609-25P](#) [609-9P](#) [CT0U22-14PSA206F127](#)
[CT1T14S-9SS](#) [CT2-22-19SC](#) [CT6-10SL-4SC](#) [CT6-20-15SSA232](#) [CT6-22-10PS](#) [CT6E14SA7SC](#) [CT6ST02-16-11SS](#) [6STD15SCT99S40X](#)
[6STF09PCM05B70X](#) [7-135760-9](#) [MD1-21PS](#) [MDM-15SCBRM7-F222](#) [MDM96521-744](#) [MDVB1-21SL1](#) [MDVB1-9SCBRP](#)
[FDL1XSRAA52X](#) [MIK0-1-7SH003](#) [MIKQ6-7SH076](#) [MIKQ7-7PH077](#) [MIKQ7-7PH11](#) [MIKQ7-7PH32](#) [MJSB-26PH003](#) [MJSV-28SL61](#)
[PG-KV/PV-16-GROM-SEALING](#) [GDA15P](#) [GDAY15PB](#) [980-0000-587](#) [980-0000-761](#) [980-2001-490](#) [980-2001-492](#) [990-0000-785](#) [990-0000-788](#) [995-0001-966](#) [995-2000-075](#) [120190-0184](#) [120-5143-011](#) [120-1840-000](#) [120-1841-000](#) [120190-0111](#) [120190-0214](#) [120-8551-102](#)