RoHS

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A0		NEW	R.Q	2021.12.15

NOTES:

1.Rated voltage : 250V(Max)
2.Current Rating: 3.0 AMP (Max.)
3.Contact Resistance: 30mΩ (Max.)
4.Withstanding voltage : 1000V AC/Minute
5.Insulation Resistance: 1000MΩ (Min)
6.Operation Temperature: −40℃ to +105℃

MATERIAL:

1.Housing : PBT (UL94V−0)
2.Contact : Copper Alloy, Au/Sn over Ni Plating
3.Shell : Steel, Ni or Sn Plated

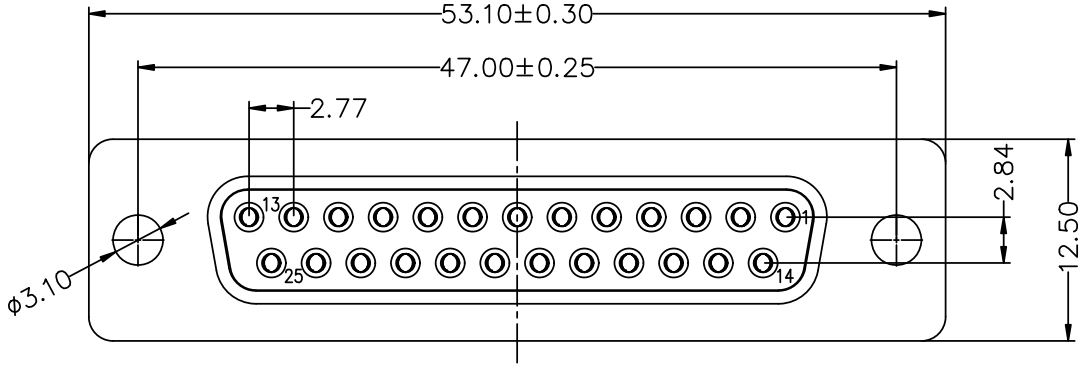

Ordering Information

6235-02 F 25 XX D X A XX

- Connector Type: F=Female, M=Male
- No.of Pins: 09,15, 25,37P
- Contact Plating: S0:Gold Flash/Tin, G0:Gold Flash, G2:2u" Gold, G3:3u" Gold, G4:5u" Gold
- Color: B=Black, W=Whtie, U=Blue
- Packing: A=Tray
- Serial code

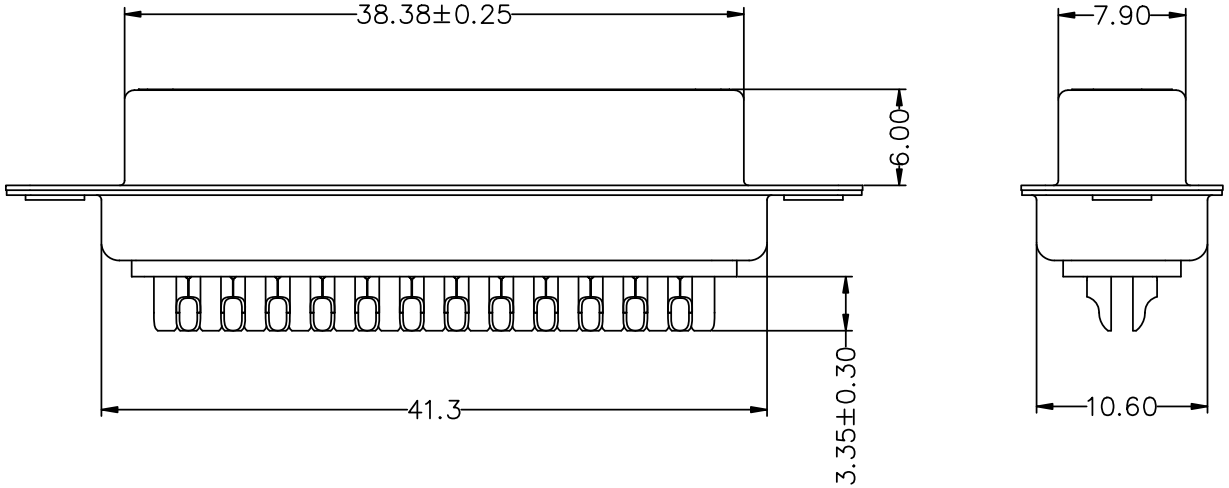

		OPERATION		SCALE	FIT
DRAW		X.X	±0.30	UNIT	mm
CHECK		X.XX	±0.20	SIZE	A4
APPROVE		X.XXX	±0.10	SHEET	1/1
		Angle	±3°	PROJ.	

JILN® 东莞市锦凌电子有限公司
DONGGUAN JINLING ELECTRONIC CO.,LTD

PART NO.	6235-02F25XXDXAXX
TITLE:	DB-25P母/传统焊线式

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for D-Sub Standard Connectors ***category:***

Click to view products by JILN ***manufacturer:***

Other Similar products are found below :

015-0341-000 015-0349-000 015-0350-000 015-8755-001 017041-0005 021-0144-011 609-25P 609-9P CT0U22-14PSA206F127 CT1T14S-9SS CT2-22-19SC CT6-10SL-4SC CT6-20-15SSA232 CT6-22-10PS CT6E14SA7SC CT6ST02-16-11SS 6STD15SCT99S40X 6STF09PCM05B70X 7-135760-9 MD1-21PS MDM-15SCBRM7-F222 MDM96521-744 MDVB1-21SL1 MDVB1-9SCBRP FDL1XSRAA52X MIK0-1-7SH003 MIKQ6-7SH076 MIKQ7-7PH077 MIKQ7-7PH11 MIKQ7-7PH32 MJSB-26PH003 MJSV-28SL61 PG-KV/PV-16-GROM-SEALING GDA15P GDAY15PB 980-0000-587 980-0000-761 980-2001-490 980-2001-492 990-0000-785 990-0000-788 995-0001-966 995-2000-075 120190-0184 120-5143-011 120-1840-000 120-1841-000 120190-0111 120190-0214 120-8551-102